

Edition 1.0 2012-11

INTERNATIONAL STANDARD

NORME INTERNATIONALE



Methods of measurement for digital network P Performance characteristics of terrestrial digital multimedia transmission network (Standards.iten.a)

Méthodes de mesure pour réseau numérique – Caractéristiques de performances d'un réseau de transmission multimédia numérique terrestre

e47a7975f1b2/jec-62553-2012





THIS PUBLICATION IS COPYRIGHT PROTECTED Copyright © 2012 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office Tel.: +41 22 919 02 11

3, rue de Varembé info@iec.ch CH-1211 Geneva 20 www.iec.ch

Switzerland

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and 55 once a month by email. https://standards.iteh.ai/catalog/standards.iteh.ai/ca

IEC Customer Service Centre - webstore.iec.ch/csc 75f1b2/iec-62353-2012

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC online collection - oc.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC - webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, ...). Elle donne aussi des informations sur les proiets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

IEC online collection - oc.iec.ch

Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.



Edition 1.0 2012-11

INTERNATIONAL STANDARD

NORME INTERNATIONALE



Methods of measurement for digital network Performance characteristics of terrestrial digital multimedia transmission network

Méthodes de mesure pour réseau numérique – Caractéristiques de performances d'un réseau de transmission multimédia numérique terrestre e47a7975fib2/iec-62553-2012

INTERNATIONAL ELECTROTECHNICAL COMMISSION

COMMISSION ELECTROTECHNIQUE INTERNATIONALE

ICS 33.170 ISBN 978-2-8322-9365-2

Warning! Make sure that you obtained this publication from an authorized distributor.

Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

CONTENTS

гΟ	KEW	שאכ	ວ	
1	Scop	pe	7	
2	Norm	Normative references		
3	Terms and abbreviations			
4	Gene	eral conditions of measurement	9	
	4.1	Definitions and classifications of digital terrestrial TV transmission network	9	
		4.1.1 General		
		4.1.2 Network classification for transmitting frequencies	10	
		4.1.3 Network classification on useable contribution links for signal transport system between stations		
	4.2	Signal form	11	
		4.2.1 TS signal form	11	
		4.2.2 IF signal form	11	
	4.3	Test signals and auxiliary signals for measurement	11	
		4.3.1 Test signals	11	
		4.3.2 Auxiliary signals for measurement	12	
5	Meth	ods of measurement for signal delay time	12	
	5.1	Scope	12	
	5.2	Scope	13	
		5.2.1 Delay time (standards.iteh.ai)		
		5.2.2 Relative delay time difference	13	
	5.3	Direct/indirect measurement	13	
		5.3.1 Generalandards.iteh.ai/catalog/standards/sist/ead3f516-4846-4b01-bfd8		
		5.3.2 Direct measurement system /iec-62553-2012		
		5.3.3 Indirect measurement system	14	
	5.4	Measurement place	14	
	5.5	Classification of measurement system		
6	Meth	ods of measurement for performances of radio wave relay station	17	
	6.1	Scope	17	
	6.2	Measurement diagram and measurement items		
		6.2.1 General	17	
		6.2.2 Measurement diagram	17	
		6.2.3 Measurement items	18	
	6.3	Methods of measurement	18	
		6.3.1 General	18	
		6.3.2 BER (case 2)	19	
		6.3.3 Equivalent noise degradation (END)	20	
		6.3.4 Amplitude frequency characteristics	21	
		6.3.5 Delay profile	22	
		6.3.6 Phase jitter	22	
7		ods of measurement for performances of signal quality improvement instrument in radio wave relay station	24	
	7.1	General	24	
	7.2	Classification of signal quality improvement instrument		
	7.3	Measurement diagram and measurement condition		
	7.4	Common measurement items		

7.5 Methods of measurement for each kind of compensator	26
Annex A (informative) Examples of measurement methods for signal delay	27
Annex B (informative) Examples of measurement methods for signal quality of relay stations	38
Annex C (normative) Principle and methods of measurement of compensators	45
Figure 1 – Example of transmission network	
Figure 2 – Delay time and relative delay time difference definitons	
Figure 3 – Direct and indirect measurement method	
Figure 4 – Measurement diagram of received signal of relay station (case a))	
Figure 5 – Measurement diagram of relay station (case b))	
Figure 6 – BER- Measurement method	
Figure 7 – Definition of END	
Figure 8 – Measurement diagram of amplitude-frequency characteristics	
Figure 9 – Measurement block diagram of delay profile	
Figure 10 – Reference model	
Figure 11 – Conceptual diagram of relay station using a compensator	
Figure A.1 – General measurement system for cases 1 to 3	
Figure A.2 – Example of frame sync signal extracting part. E.V. E.W.	
Figure A.3 – Example of OFDM demodulator for frame timing extraction	29
Figure A.4 – Block diagram of direct measurement methods for time delay of OFDM signal	30
Figure A.5 – Example of frequency characteristics of combined signal bits	
Figure A.6 – Example of delay profile of combined signal 1.2.	31
Figure A.7 – General measurement system for cases 5,6,13 and 14	32
Figure A.8 – Timing chart for signal delay measurement	32
Figure A.9 – Principle of measurement using 1 pps signal	33
Figure A.10 – General measurement system for cases 7, 8 and 15,16	34
Figure A.11 – Measurement system for delay time (time reference is 1pps signal of GPS)	
Figure A.12 – Timing relation of each signals	
Figure A.13 – Delay profile of OFDM signal	
Figure B.1 – BER measurement conceptual diagram for Null Packet method	
Figure B.2 – Examples of measurement result by Null Packet method	
Figure B.3 – Method to compare the data before/after correction	
Figure B.4 – Superimposed C/N measurement system	
Figure B.5 – Inherent degradation of OFDM demodulator measurement system	
Figure B.6 – Calculation process of delay profile	44
Figure C.1 – Example of measurement block diagram for performances of loop-back canceller	46
Figure C.2 – Example of measurement block diagram for performances of diversity	
reception equipment	48
Figure C.3 – Example of measurement block diagram for performances of co-channel	
interference canceller	50

Figure C.4 – Example of measurement block diagram for performances of C/N Reset equipment	52
Table 1 – Classification of contribution link	11
Table 2 – Parameter set of OFDM signal for test in ISDB-T system	11
Table 3 – Parameter set of OFDM signal for test in DVB-T/H system	12
Table 4 – Combination of signal type	13
Table 5 – Classification of measurement system for signal delay time	16
Table 6 – An example of measurement items for Relay station	18
Table 7 – Example of the parameter set of spectrum analyzer	22
Table 8 – Compensators used in digital terrestrial broadcasting relay network	25
Table 9 – Examples of measurement items for signal quality improvement instrument	26
Table A.1 – Signal format and timing extraction of each case	27
Table A.2 – Equipment list for measurement	30
Table A.3 – Equipment list for delay time measurement	35
Table B.1 – Definition of Null Packet (in case of ISDB-T)	38
Table B.2 – Example of noise power measurement parameters (6 MHz ISDB-T)	42
Table B.3 – Example of signal power measurement parameters (6 MHz ISDB-T)	42
(standards.iteh.ai)	

<u>IEC 62553:2012</u> https://standards.iteh.ai/catalog/standards/sist/ead3f516-4846-4b01-bfd8e47a7975f1b2/iec-62553-2012

INTERNATIONAL ELECTROTECHNICAL COMMISSION

METHODS OF MEASUREMENT FOR DIGITAL NETWORK -

Performance characteristics of terrestrial digital multimedia transmission network

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, EC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity.0Independent certification bodies provide conformity assessment services and sin some areas access to IEC marks of conformity.0IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62553 has been prepared by subcommittee IEC technical committee 103: Transmitting equipment for radiocommunication.

The text of this standard is based on the following documents:

CDV	Report on voting
103/89/CDV	103/106/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- · reconfirmed,
- withdrawn,
- · replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>IEC 62553:2012</u> https://standards.iteh.ai/catalog/standards/sist/ead3f516-4846-4b01-bfd8-e47a7975f1b2/iec-62553-2012

METHODS OF MEASUREMENT FOR DIGITAL NETWORK -

Performance characteristics of terrestrial digital multimedia transmission network

1 Scope

When a transmission network for digital terrestrial television broadcasting (DTTB) is being deployed, new networking technologies such as the Single Frequency Network (SFN) can be employed excelling the conventional analogue TV systems. However, new technical evaluation parameters are introduced for installing SFN systems. In addition new quality evaluation methods are also established in order to achieve stable and high-quality broadcasting services avoiding the cliff effect, which is one of the typical phenomena in the digital transmission that the signal quality is abruptly degraded when the received C/N becomes just lower than a specific value representing the system limit.

Given the background described above, this International Standard has the purposes of

- establishing measuring methods that enable the objective evaluation of the performance of transmission networks so as to make stable DTTB services a reality,
- establishing a technical baseline, such as a definition of technical terms, to standardize measuring methods.

 (standards.iteh.ai)

The measurement methods described in this standard are intended for digital terrestrial television transmission network test and validation. The measurement methods for digital terrestrial transmitter are not included in this standard. These methods are described in IEC 62273-1.

647a7975flb2/iec-62553-2012

This standard does not give any regulations and/or mandatory requirements. The specifications and requirements defined for each system have priority over this standard. However, there may be some cases where details are not specified in each individual specification or different systems should be evaluated under a common measurement method. The purpose of this standard is to provide a common technical baseline that makes measurement results comparable in all cases.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62273-1:2007, Methods of measurement for radio transmitters – Performance characteristics of terrestrial digital televisiont transmitters

ISO/IEC 13818-1:2007, Information technology – Generic coding of moving pictures and associated audio information: Systems

Amendments 1 to 6

TR 101 190, Digital video broadcasting (DVB); implementation guidelines for DVB Terrestrial services; Transmission aspects

TS 101 191, Digital video broadcasting (DVB); DVB mega-frame for Single Frequency Network (SFN) synchronization

TR 102 377, Digital Video Broadcasting (DVB); DVB-H Implementation Guidelines

ARIB STD-B31, Transmission system for digital terrestrial television broadcasting

3 Terms and abbreviations

ADC Analog to Digital Converter

ARIB Association of Radio Industries and Businesses

ASI Asynchronous Serial Interface
ATM Asynchronous Transfer Mode

BER Bit Error Ratio

C/N Carrier to Noise rate
CPU Central Processing Unit

DTTB Digital Terrestrial Television Broadcasting

DVB Digital Video Broadcasting

DVB-H DVB Handheld

DVB-T DVB Terrestrial STANDARD PREVIEW

D/U Desired to Undesired Signal Ratio

END Equivalent Noise Degradation ards.iteh.ai)

ETSI European Telecommunication Standards Institute

FFT Fast Fourier/stransform.ai/catalog/standards/sist/ead3f516-4846-4b01-bfd8-

GPS Global Positioning System a 7975flb2/iec-62553-2012

IF Intermediate Frequency

IFFT Inverse Fast Fourier Transform
IIP ISDB-T Information Packet

IP Internet Protocol

ISDB-T Integrated Services Digital Broadcasting – Terrestrial

ISI Inter Symbol Interference

ISO International Organization for Standardization

ITU International Telecommunication Union

JEITA Japan Electronics and Information Technology Industries Association

MER Modulation Error Ratio
MFN Multi-Frequency Network

MIP Mega-frame Initialization PacketMMSE Minimum Mean Square ErrorMPEG Moving Picture Experts Group

OFDM Orthogonal Frequency Division Multiplex

PCR Program Clock Reference

PCR_AC PCR Accuracy
PCR_FO PCR Offset

PCR_OJ PCR Overall Jitter

PDH Plesiochronous Digital Hierarchy

PRBS Pseudo Random Binary Sequence

PID Packet Identifier
PLL Phased Locked Loop
PN Pseudo Random Noise

QAM Quadrature Amplitude Modulation

RBW Resolution Bandwidth
RF Radio Frequency
RS Reed-Solomon

SDH Synchronous Digital Hierarchy
SFN Single Frequency Network

SP Scattered Pilot signal

SPI Synchronous Parallel Interface
STL Studio to Transmitter Link
STS Synchronization Time Stamp

TMCC Transmission and Multiplex Configuration Control signal

TS Transport Stream

TTL Transmitter to Transmitter Link

TV TeleVision

UHF Ultra-High Frequency (300 MHz to 3 000 MHz)

UI Unit Interval (standards.iteh.ai)

VBW Video Bandwidth

VHF Very High Frequency (30 MHz to 300 MHz)

Very High Frequency (30 MHz to 300 MHz)

Very High Frequency (30 MHz to 300 MHz)

VLAN Virtual Local Area Network 7975f1b2/iec-62553-2012

4 General conditions of measurement

4.1 Definitions and classifications of digital terrestrial TV transmission network

4.1.1 General

The digital terrestrial broadcasting transmission networks defined in this standard consist of two or more Digital Tv transmitters, relay lines (SDH or PDH contribution link: e.g. satellite, ATM radio, ATM optical fibre, IP Ethernet VLAN), broadcast-wave relay stations (called Gap-Filler or Transposer) through which the same broadcasting program is transmitted. Figure 1 shows an example of the transmission network.

The network is classified in 4.1.2 and 4.1.3 according to the following conditions

- a) Assigned frequencies of each transmitter station which compose the network.
- b) Signal transmission method between transmitter stations.

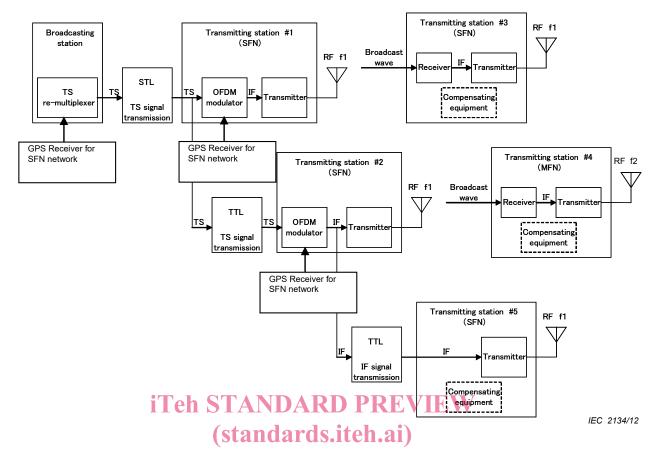


Figure 1 - Example of transmission network

https://standards.iteh.ai/catalog/standards/sist/ead3f516-4846-4b01-bfd8-

4.1.2 Network classification for transmitting frequencies

SFN: Transmission network which is composed by plural transmitter stations whose assigned frequencies are the same. In Figure 1, transmitter stations, which are marked #1,#2,#3, and #5 and use the same transmitting frequency f1, compose the SFN.

MFN: transmission network which is composed by plural transmitter stations whose assigned frequencies are different. In Figure 1, #2 transmitter stations whose assigned frequency is f1 and #4 transmitter station whose assigned frequency is f2 compose the MFN.

In case of SFN, transmission parameters of each transmitter station should satisfy the following conditions:

- a) The difference of transmitted frequency of each station should be within a specified range.
- b) If necessary, the difference of sampling frequency of transmitted OFDM signals of each station should be within a specified range.
- c) Waveform of transmitted signals means the channel modulation of each station should be the same. It means that the data contents of modulation of each station should be the same.
- d) The difference of transmission timing of each transmitter station should be within a specified range.
- e) The synchronized operation of each station shall be necessary. For synchronized operation, GPS time reference is used as a network reference signal or network should be locked to GPS time reference.

4.1.3 Network classification on useable contribution links for signal transport system between stations

Different contribution links for signal transport system between stations are investigated and mentioned in Table 1.

Table 1 - Classification of contribution link

Contribution link	Transmission system	Signal		
STL(Studio to Transmitter Link)	Transport Stream transmission system	Digitalized Broadcast program and control information(note)		
	IF transmission system	Modulated OFDM signal(note)		
TTL(Transmitter to Transmitter Link)	Transport Stream transmission system	Digitalized Broadcast program and control information(note)		
	IF transmission system	Modulated OFDM signal(note)		
Broadcast wave relay	Broadcast wave relay system	Modulated OFDM signal(note)		
NOTE Refer to 4.2.2 for signal form.				

4.2 Signal form

4.2.1 TS signal form

Signal form in which digitalized broadcast program contents and control information are multiplexed. For details of signal format, the following documents should be referred.

- DVB-T/H system: ETSI TR 101 190, ETSI TR 102 377
- ISDB-T system: ARIB STD-B31 Operational Guideline chapter 5.5

4.2.2 IF signal form

IEC 62553:2012

https://standards.itch.ai/catalog/standards/sist/ead3f516-4846-4b01-bfd8-OFDM signal which is modulated by digitalized broadcast signal. For details of signal format, the following documents should be referred.

- DVB-T system: ETSI TR 101 190, ETSI TR 102 377
- ISDB-T system; ARIB STD-B31 Main body

4.3 Test signals and auxiliary signals for measurement

4.3.1 Test signals

As test signals for measurement, the following signals can be used. The broadcasting Transport Stream signal used for on-air services, or the equivalent broadcasting Transport Stream signal in it, or the OFDM signal used for on-air.

The specifications of the test signals should be specified for each system, but unless specified, for OFDM signal, the following transmission parameter set should apply, see Tables 2 and 3:

Table 2 - Parameter set of OFDM signal for test in ISDB-T system

Parameter	Value
Channel bandwidth	6 MHz
Number of carriers	8k
Guard interval ratio	1/8
Time interleave (see note)	I=2
Carrier modulation	64QAM
Coding rate of inner code	3/4 or 7/8
NOTE Apply for ISDB-T system.	•

Table 3 - Parameter set of OFDM signal for test in DVB-T/H system

Parameter	Value
Channel bandwidth	6 MHz / 7 MHz / 8 MHz
Number of carriers	8k
Guard interval ratio	1/8
Time interleave(see note)	Native
Carrier modulation	64QAM
Coding rate of inner code	2/3
NOTE Apply for DVB-T/H system.	

4.3.2 Auxiliary signals for measurement

4.3.2.1 General

For measurement of signal delay, the auxiliary signals shown below are used.

4.3.2.2 Reference signal

- a) 10 MHz signal; 10 MHz reference signal which is synchronized to GPS.
- b) Sample clock pulse (see note); reference signal which is synchronized to Broadcast TS signal or sample clock signal of OFDM signal.

NOTE For 6 MHz ISDB-T system, its frequency is 512/63 MHz 1 e 1 a 1

4.3.2.3 1 pps signal

IEC 62553:2012

Used for signal delay measurement withing syuntess specified leading edge of 1 pps signal and up edge of 10 MHz sine wave signal should coincide 53-2012

1 pps signal and 10 MHz reference signal are obtained by making use of Reference signal generator with GPS synchronization.

4.3.2.4 Frame sync. Signal

Frame sync. Signal is extracted from frame synchronization information multiplexed in broadcast TS signal described in 4.2.1. In case of OFDM signal, frame sync. signal is regenerated from demodulator timing recovery circuit.

Frame sync. Signal may be used as a reference signal for signal delay measurement. The relationship between frame sync. Signal and sample clock should be specified for each system.

In addition, it is possible to widen the measurement range to more than 1 frame, by making use of the following information which is multiplexed in Transport stream.

- DVB-T system: mega-frame information, refer to ETSI TS 101 191.
- ISDB-T system: frame identification signal, refer to ARIB STD-B31.

5 Methods of measurement for signal delay time

5.1 Scope

Management of signal delay in transmission network is one important issue for SFN operation in Digital Terrestrial Broadcasting Network. In this clause, measurement methods for signal delay of transmission lines and equipments, and for relative delay time difference between different

transmission links are described. Signal delay of video and audio encoder/decoder is out of scope.

5.2 Definition of signal delay time

5.2.1 Delay time

As shown in Figure 2 a), delay time should be defined as the delay time between input signal and output signal of same transmission link.

Kinds of signal type of input/output are described in Table 4.

5.2.2 Relative delay time difference

As shown in Figure 2 b), relative delay time difference should be defined as the relative time difference between outputs of different transmission links.

Kinds of signal type of input/output are described in Table 4.

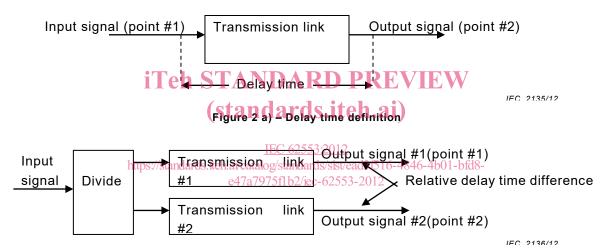


Figure 2 b) - Definition of relative delay time difference

Figure 2 - Delay time and relative delay time difference definitons

Measurement item Measurement point #1 Measurement point #2 Delay time Broadcast TS signal Broadcast TS signal Broadcast TS signal OFDM signal OFDM signal OFDM signal Broadcast TS signal Relative delay time Broadcast TS signal difference OFDM signal OFDM signal

Table 4 - Combination of signal type

NOTE See details for signal type in Clause 4.

5.3 Direct/indirect measurement

5.3.1 General

As defined in 5.2, both signal delay and relative delay time difference are given as the time difference between measurement point #1 and #2.