

## SLOVENSKI STANDARD

SIST EN 3645-003:2009

01-maj-2009

5 YfcbUj H\_U!`?cbY\_hcf\_YY\_hf] b]žc\_fc[ `žnUý ]hYb\_cbhU\_hž\ ]lfUgdc^\_Un  
bUj c Ya žglUj bUXYcj bUhya dYfUi fU%#) š7 'U]`\$\$\_š7 '!\$\$' "XY.'Gdc b]\_g  
\_j UXfUbc'a cbhUjbc df]fcVb]Wc !'GHUbXUX'nUdfc]nj cX

Aerospace series - Connectors, electrical, circular, scoop-proof, triple start threaded coupling, operating temperature 175 °C or 200 °C continuous - Part 003: Receptacle square flange mounting - Product standard

## iTeh STANDARD PREVIEW

Luft- und Raumfahrt - Elektrische Rundsteckverbinder, kontaktgeschützt, dreigängige Gewinde-Schnellkupplung, Betriebstemperatur 175 °C oder 200 °C konstant - Teil 003: Fester Steckverbinder mit quadratischem Montageflansch - Produktnorm

SIST EN 3645-003:2009

<https://standards.iteh.ai/catalog/standards/sist/b07f81ad-2d2d-4dd9-a6a->

Série aérospatiale - Connecteurs électriques circulaires à contacts protégés, à accouplement par filetage à pas rapide à trois filets, températures d'utilisation 175 °C ou 200 °C continu - Partie 003 : Embase à fixation par collerette carrée - Norme de produit

Ta slovenski standard je istoveten z: EN 3645-003:2006

**ICS:**

49.060 Ščap\ aš Á^•[ |b\ æ Aerospace electric  
^|^\ dā} aš] |^{\ aš Áaç\{ á equipment and systems

SIST EN 3645-003:2009

en,de

## iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 3645-003:2009

<https://standards.iteh.ai/catalog/standards/sist/b07f81ad-2d2d-4dd9-affa-e4180dab400b/sist-en-3645-003-2009>

**EUROPEAN STANDARD  
NORME EUROPÉENNE  
EUROPÄISCHE NORM**

**EN 3645-003**

December 2006

ICS 49.060

English Version

**Aerospace series - Connectors, electrical, circular, scoop-proof,  
triple start threaded coupling, operating temperature 175 °C or  
200 °C continuous - Part 003: Receptacle square flange  
mounting - Product standard**

Série aérospatiale - Connecteurs électriques circulaires à contacts protégés, à accouplement par filetage à pas rapide à trois filets, températures d'utilisation 175 °C ou 200 °C continu - Partie 003 : Embase à fixation par colerette carrée - Norme de produit

Luft- und Raumfahrt - Elektrische Rundsteckverbinder, kontaktgeschützt, Drei-gangige Gewinde-Schnellkupplung, Dauerbetriebstemperaturen 175 °C oder 200 °C - Teil 003: Fester Steckverbinder mit quadratischem Montageflansch - Produktnorm

This European Standard was approved by CEN on 28 September 2006.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

<https://standards.iteh.ai/catalog/standards/sist/b07f81ad-2d2d-4dd9-af6a-a1201400/sist-en-3645-003-2006>

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

	Page
<b>Contents</b>	
<b>Foreword</b> .....	<b>3</b>
1 <b>Scope</b> .....	4
2 <b>Normative references</b> .....	4
3 <b>Terms and definitions</b> .....	4
4 <b>Required characteristics</b> .....	5
5 <b>Designation</b> .....	8
6 <b>Marking</b> .....	9
7 <b>Technical specification</b> .....	9

## iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 3645-003:2009

<https://standards.iteh.ai/catalog/standards/sist/b07f81ad-2d2d-4dd9-affa-e4180dab400b/sist-en-3645-003-2009>

## Foreword

This document (EN 3645-003:2006) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by June 2007, and conflicting national standards shall be withdrawn at the latest by June 2007.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

## THE STANDARD PREVIEW (standards.iteh.ai)

SIST EN 3645-003:2009

<https://standards.iteh.ai/catalog/standards/sist/b07f81ad-2d2d-4dd9-affa-e4180dab400b/sist-en-3645-003-2009>

## EN 3645-003:2006 (E)

### 1 Scope

This standard specifies the characteristics of square flange mounted receptacles in the family of circular electrical connectors with triple start threaded coupling.

It applies to models in Table 3.

For contacts, filler plugs and rear accessories associated with this receptacle, see EN 3645-002. For plugs and protective covers, see EN 3645-008, EN 3645-011, EN 3645-012 and EN 3645-006 respectively.

These connectors are derived from and are interchangeable with those in standard MIL-DTL-38999/20.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

*EN 3645-001, Aerospace series — Connectors, electrical, circular, scoop-proof, triple start threaded coupling, operating temperature 175 °C or 200 °C continuous — Part 001: Technical specification.*

*EN 3645-002, Aerospace series — Connectors, electrical, circular, scoop-proof, triple start threaded coupling, operating temperature 175 °C or 200 °C continuous — Part 002: Specification of performance and contact arrangements.*

## iTeh STANDARD PREVIEW

*EN 3645-006, Aerospace series — Connectors, electrical, circular, scoop-proof, triple start threaded coupling, operating temperature 175 °C or 200 °C continuous — Part 006: Protective cover for receptacle — Product standard.*

SIST EN 3645-003:2009

*EN 3645-008, Aerospace series — Connectors, electrical, circular, scoop-proof, triple start threaded coupling, operating temperature 175 °C or 200 °C continuous — Part 008: Non-release plug with grounding ring — Product standard.*

*EN 3645-011, Aerospace series — Connectors, electrical, circular, scoop-proof, triple start threaded coupling, operating temperature 175 °C or 200 °C continuous — Part 011: Lanyard release plug with grounding fingers — Type 1 — Product standard.*

*EN 3645-012, Aerospace series — Connectors, electrical, circular, scoop-proof, triple start threaded coupling, operating temperature 175 °C or 200 °C continuous — Part 012: Lanyard release plug with grounding fingers — Type 2 — Product standard.*

*MIL-DTL-38999/20, Connectors, electrical, circular, receptacle, threaded, wall mounting flange, removable crimp contacts, series III, metric. <sup>1)</sup>*

### 3 Terms and definitions

For the purposes of this standard, the terms and definitions given in EN 3645-001 apply.

---


1) Published by: Department of Defense (DOD), The Pentagon, Washington D.C. 20301 USA.

## 4 Required characteristics

### 4.1 Dimensions and mass

See Figure 1 and Table 1.

Dimensions and tolerances are in millimetres.

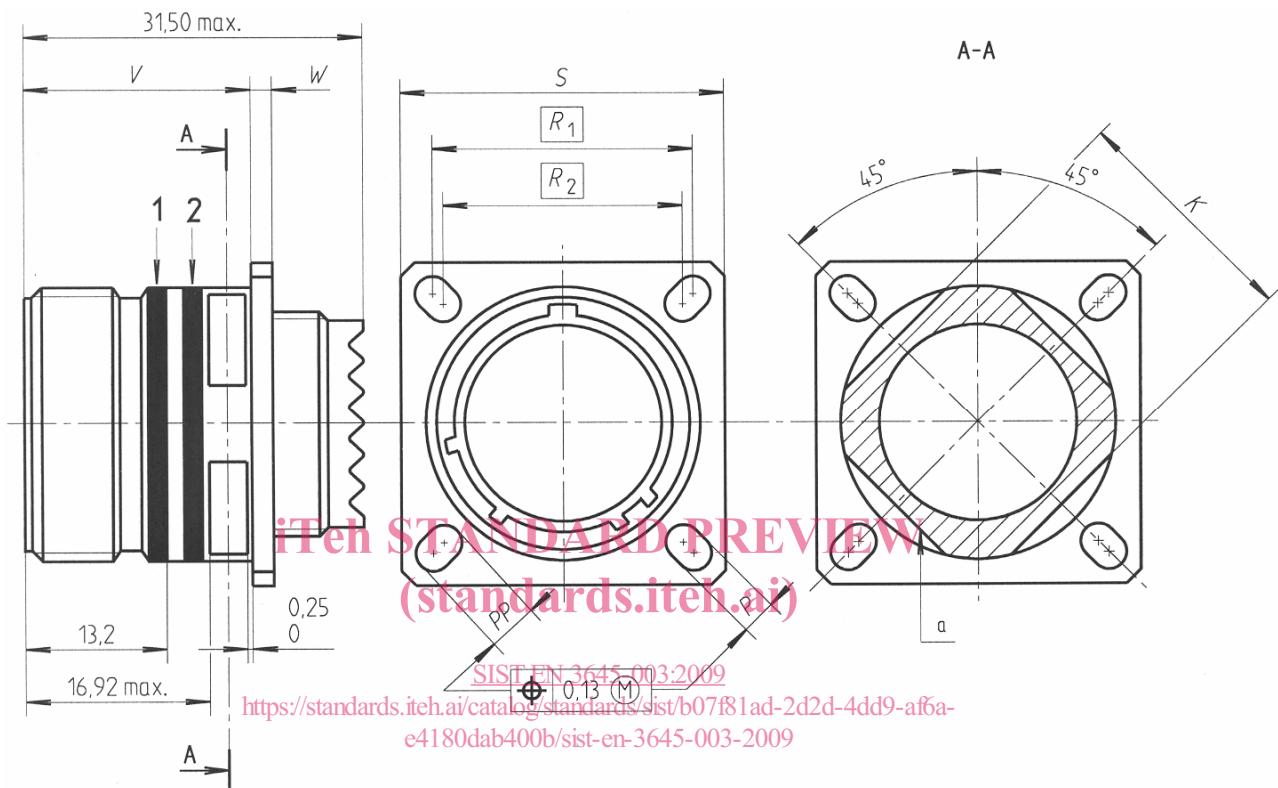

#### Key

- 1 Red strip
- 2 Blue strip
- a Optional detail for Models J and M

**Figure 1 — Square flange receptacle**

**Table 1 — Square flange receptacle – Dimensions**

Shell size	K max.	P ± 0,20	PP ± 0,20	R <sub>1</sub>	R <sub>2</sub>	S ± 0,30	V + 1,4 0	W		Mass without contacts g max.		
								Models J and M	Other models	Models W, F	Model K	Models J, M
09	11,84	3,25	5,49	18,26	15,09	23,80	19,50	3,65 2,10	2,50 2,10	10	25	8
11	15,01			20,62	18,26	26,20				16	32	12
13	19,08			23,01	20,62	28,60				19	42	17
15	22,25			24,61	23,01	31,00				25	50	20
17	25,43			26,97	24,61	33,30				32	67	26
19	28,60			29,35	26,97	36,50				39	82	32
21	31,78			31,75	29,36	39,70	18,70	4,35 2,10	3,20 2,10	45	91	36
23	34,95	3,91	6,15	34,93	31,75	42,90				54	103	45
25	38,13			38,10	34,93	46,00				59	125	51

**4.2 Materials and surface treatment**


iTeh STANDARD PREVIEW  
(standards.iteh.ai)

**4.3 Recommended panel cut-out**

SIST EN 3645-003:2009

See Figure 2 and Table 2. <https://standards.iteh.ai/catalog/standards/sist/b07f81ad-2d2d-4dd9-affa-e4180dab400b/sist-en-3645-003-2009>

Dimensions and tolerances are in millimetres.

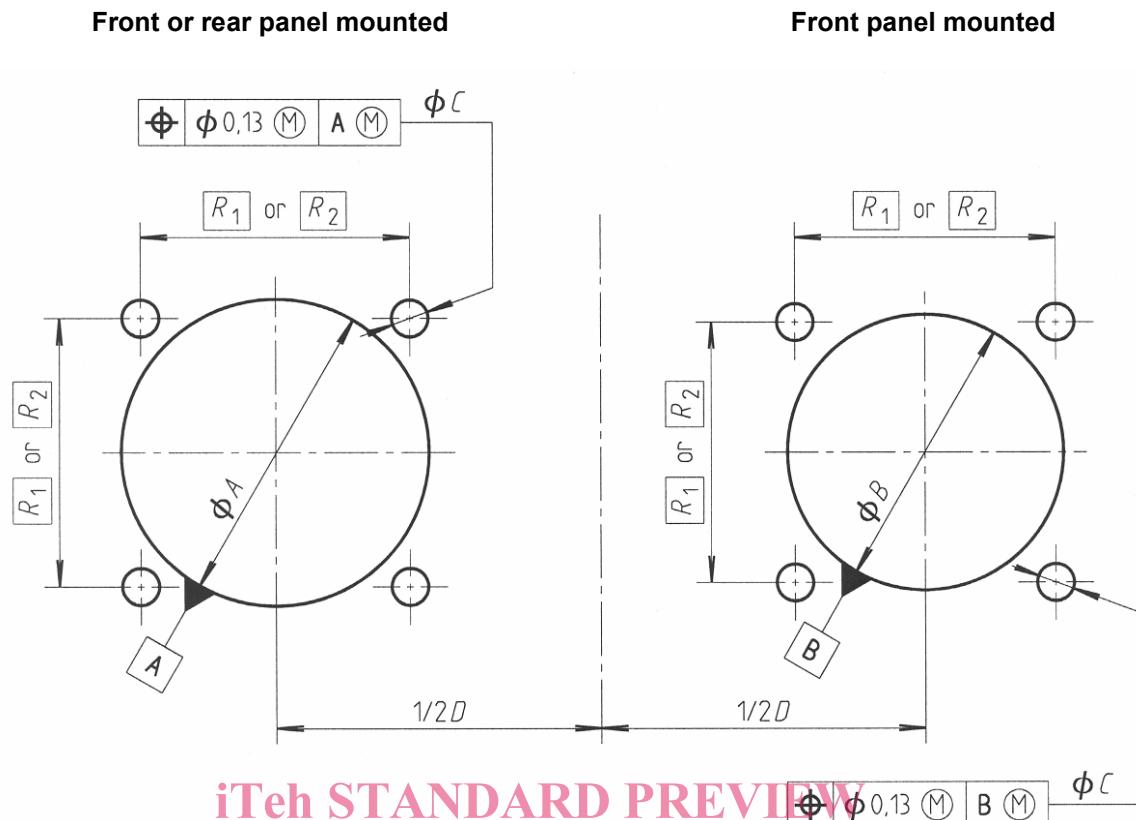

Optional panel cut-out

Rear panel mounted, thickness: 09 to 19: 5,94  
<https://standards.iteh.ai/catalog/standards/sist/b07f81ad-2d2d-4dd9-a6fa-e4180dab400b/sist-en-3645-003-2009>

Figure 2 — Panel cut-out

Table 2 — Panel cut-out — Dimensions

Shell size	A min.	B min.	C ± 0,13	D min.	R <sub>1</sub>	R <sub>2</sub> <sup>a</sup>
09	16,66	13,11	3,25	31,80	18,26	15,09
11	20,22	15,88		35,00	20,62	18,26
13	23,42	19,05		39,40	23,01	20,62
15	26,59	23,01		42,50	24,61	23,01
17	30,96	25,81		45,70	26,97	24,61
19	32,94	28,98		48,50	29,36	26,97
21	36,12	32,16		51,70	31,75	29,36
23	39,29	34,93		54,90	34,93	31,75
25	42,47	37,69		58,00	38,10	34,93

<sup>a</sup> R<sub>2</sub> is not applicable to models J and M.