



SLOVENSKI STANDARD

SIST EN 3645-007:2008

01-februar-2008

5 YfcbUj h_U'!?'cbY_lcf1žYY_hf] b]žc_fc[`]žnUý]hYb]_cbHU_lž\]hfUgdc^_Un
bUj c^Ya žghUbuXYcj bUHya dYfUhi fUa YX'%) š7 `]b'&\$\$ š7 '!\$\$+'XY. NUý]fbU
_UdUnUj h] `!GHUbXUF'X'nUdfc]nj cX

Aerospace series - Connectors, electrical, circular, scoop-proof, triple start threaded coupling, operating temperature 175 °C or 200 °C continuous - Part 007: Protective cover for plug - Product standard

Luft- und Raumfahrt - Elektrische Rundsteckverbinder, kontaktgeschützt, Drei-gangige Gewinde-Schnellkupplung, Dauerbetriebstemperaturen 175 °C oder 200 °C - Teil 007: Schutzkappe für frein Steckverbinder - Produktnorm

SIST EN 3645-007:2008

Série aérospatiale - Connecteurs électriques circulaires a contacts protégés, a accouplement par filetage a pas rapide a trois filets, températures d'utilisation 175 °C ou 200 °C continu - Partie 007 : Bouchon de vol pour fiche - Norme de produit

Ta slovenski standard je istoveten z: EN 3645-007:2007

ICS:

49.060 Š^æ\ æš Á^•[|b\ æ Aerospace electric
^|\ dā} æ] !^{\ æš Á ā c\ ā equipment and systems

SIST EN 3645-007:2008

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3645-007:2008

<https://standards.iteh.ai/catalog/standards/sist/bd24a0fe-33c3-48bf-89e6-ff6d292ddc2c1/sist-en-3645-007-2008>

ICS 49.060

English Version

**Aerospace series - Connectors, electrical, circular, scoop-proof,
triple start threaded coupling, operating temperature 175 °C or
200 °C continuous - Part 007: Protective cover for plug - Product
standard**

Série aérospatiale - Connecteurs électriques circulaires à contacts protégés, à accouplement par filetage à pas rapide à trois filets, températures d'utilisation 175 °C ou 200 °C continu - Partie 007 : Bouchon de vol pour fiche - Norme de produit

Luft- und Raumfahrt - Elektrische Rundsteckverbinder, kontaktgeschützt, Drei-gangige Gewinde-Schnellkupplung, Dauerbetriebstemperaturen 175 °C oder 200 °C - Teil 007: Schutzkappe für frein Steckverbinder - Produktnorm

This European Standard was approved by CEN on 28 September 2006.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

Page

Foreword.....	3
1 Scope	4
2 Normative references	4
3 Terms and definitions	4
4 Required characteristics	5
5 Designation	6
6 Marking	7
7 Technical specification	7

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 3645-007:2008](https://standards.iteh.ai/catalog/standards/sist/bd24a0fe-33c3-48bf-89e6-f6d292ddc2c1/sist-en-3645-007-2008)

<https://standards.iteh.ai/catalog/standards/sist/bd24a0fe-33c3-48bf-89e6-f6d292ddc2c1/sist-en-3645-007-2008>

Foreword

This document (EN 3645-007:2007) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by April 2008, and conflicting national standards shall be withdrawn at the latest by April 2008.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

ITEH STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 3645-007:2008](https://standards.iteh.ai/catalog/standards/sist/bd24a0fe-33c3-48bf-89e6-f6d292ddc2c1/sist-en-3645-007-2008)

<https://standards.iteh.ai/catalog/standards/sist/bd24a0fe-33c3-48bf-89e6-f6d292ddc2c1/sist-en-3645-007-2008>

1 Scope

This standard specifies the characteristics of protective covers for plugs in the family of circular, electrical connectors, with triple start threaded coupling.

It applies to models in Table 2.

For plugs, see EN 3645-008, EN 3645-011 and EN 3645-012.

These connectors are derived from and interchangeable with models W, F and K in specification MIL-DTL-38999/32.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 3645-001, *Aerospace series — Connectors, electrical, circular, scoop-proof, triple start threaded coupling, operating temperature 175 °C or 200 °C continuous — Part 001: Technical specification.*

EN 3645-002, *Aerospace series — Connectors, electrical, circular, scoop-proof, triple start threaded coupling, operating temperature 175 °C or 200 °C continuous — Part 002: Specification of performance and contact arrangements.*

EN 3645-008, *Aerospace series — Connectors, electrical, circular, scoop-proof, triple start threaded coupling, operating temperature 175 °C or 200 °C continuous — Part 008: Non release plug with grounding ring — Product standard.*

EN 3645-011, *Aerospace series — Connectors, electrical, circular, scoop-proof, triple start threaded coupling, operating temperature 175 °C or 200 °C continuous — Part 011: Lanyard release plug with grounding fingers — Type 1 — Product standard.*

EN 3645-012, *Aerospace series — Connectors, electrical, circular, scoop-proof, triple start threaded coupling, operating temperature 175 °C or 200 °C continuous — Part 012: Lanyard release plug with grounding fingers — Type 2 — Product standard.*

MIL-DTL-38999/32, *Connector, electrical, circular, cover, protective, plug, series III, metric.* ¹⁾

3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 3645-001 apply.


1) Published by: Department of Defense (DoD), The Pentagon, Washington D.C. 20301 USA.

4 Required characteristics

4.1 Dimensions and mass

See Figure 1 and Table 1.

Dimensions and tolerances are in millimetres.

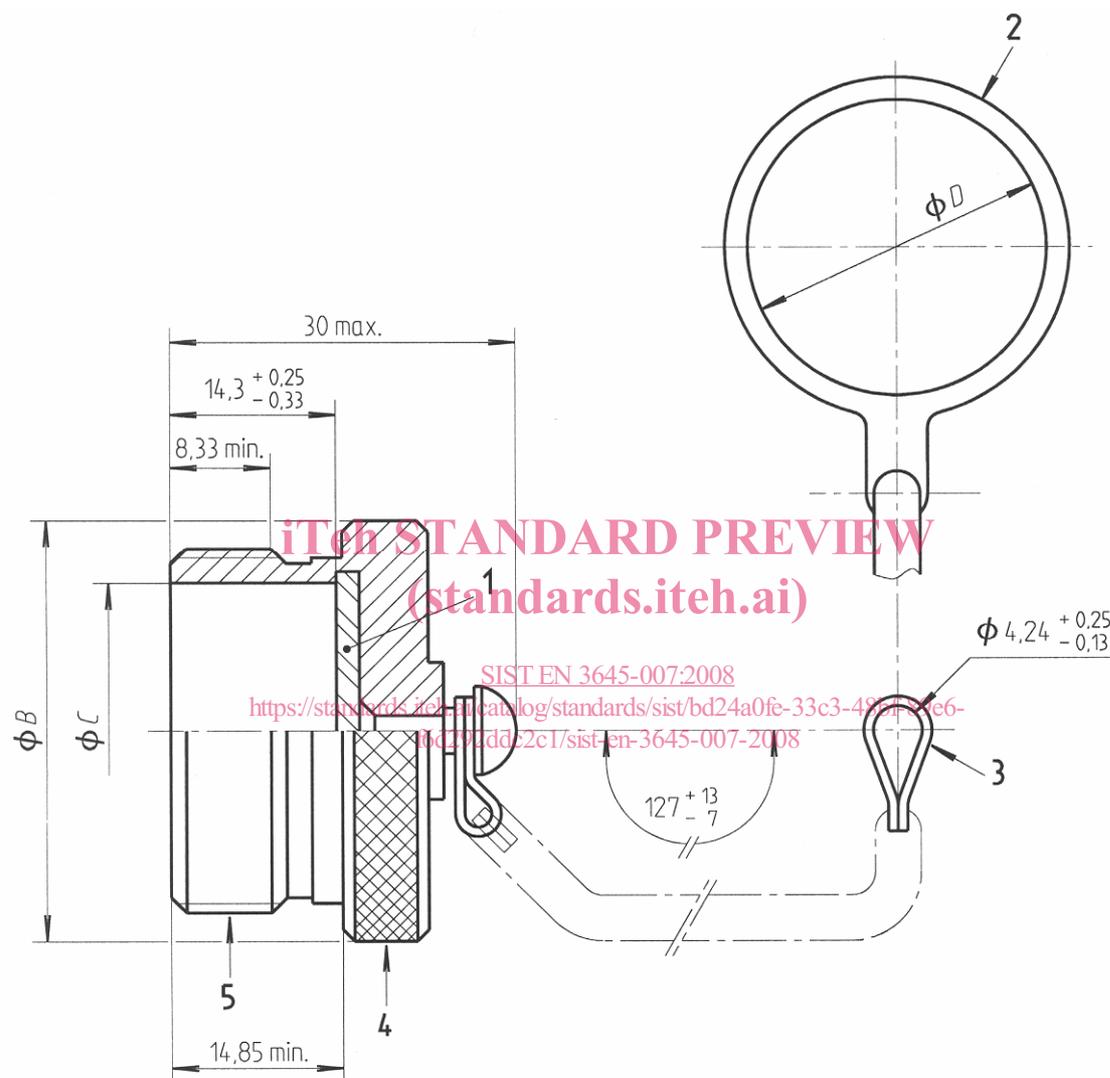

Key

- 1 Seal
- 2 Attachment type 7
- 3 Attachment type 0
- 4 Milling or knurling
- 5 Thread *A*

Figure 1 — Protective cover

Table 1 — Protective cover – Dimensions

Shell size	See note ^a	A thread						B max.	C max.	D min.	Mass g max.	
		External thread – Class 2A									Models W and F Aluminium	Model K Stainless steel
		External diameter		Diameter on side		Diameter at thread end						
min.	max.	min.	max.	min.	max.							
09	0,0381	15,63	15,83	14,97	15,17	14,05	14,41	23,00	12,50	13,00	12	34
11		18,80	19,01	18,14	18,35	17,23	17,58	26,00	15,75	18,00	13	36
13		21,98	22,18	21,32	21,52	20,41	20,76	31,00	19,53	20,00	14	40
15		25,15	25,36	24,49	24,70	23,58	23,94	33,00	22,71	23,00	16	46
17		29,80	30,11	28,99	29,24	27,82	28,28	37,00	25,88	26,00	18	52
19	0,0508	31,39	31,69	30,58	30,83	29,41	29,87	40,00	28,55	29,00	20	58
21		34,56	34,87	33,75	34,01	32,59	33,05	44,00	31,72	32,00	22	64
23		37,74	38,04	36,93	37,18	35,76	36,22	46,00	34,90	34,00	24	70
25		40,91	41,22	40,10	40,36	38,94	39,40	50,00	38,07	39,00	27	80

^a Sizes for protected threads: it is permissible to increase the maximum limit of the diameters for these sizes by the value given in this column.

iTeh STANDARD PREVIEW

4.2 Materials and surface treatment (standards.iteh.ai)

See Table 2.

SIST EN 3645-007:2008


<https://standards.iteh.ai/catalog/standards/sist/bd24a0fe-33c3-48bf-89e6-922222222222/en-3645-007-2008>

4.3 Electrical, mechanical and climatic characteristics

See EN 3645-002.

5 Designation

EXAMPLE

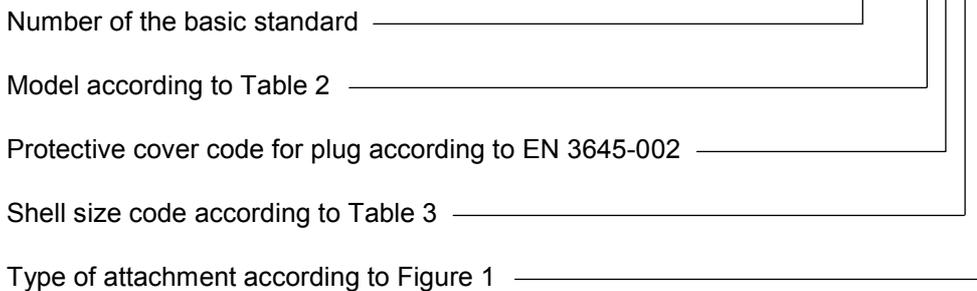

NOTE If necessary, the code 19005 shall be placed between the classification block and the identity block.