

TECHNICAL REPORT

RAPPORT TECHNIQUE

Guidance concerning the permissible temperature rise for parts of electrical equipment, in particular for terminals

Guide concernant l'échauffement admissible des parties des matériels électriques, en particulier les bornes de raccordement

[IEC TR 60943:1998+AMD1:2008 CSV](https://standards.iteh.ai/catalog/standards/sist/1a15b539-1d38-42e6-92f5-3e1f251fbbd8/iec-tr-60943-1998amd1-2008-csv)

<https://standards.iteh.ai/catalog/standards/sist/1a15b539-1d38-42e6-92f5-3e1f251fbbd8/iec-tr-60943-1998amd1-2008-csv>





THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2009 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Catalogue IEC - webstore.iec.ch/catalogue

Application autonome pour consulter tous les renseignements bibliographiques sur les Normes internationales, Spécifications techniques, Rapports techniques et autres documents de l'IEC. Disponible pour PC, Mac OS, tablettes Android et iPad.

Recherche de publications IEC - www.iec.ch/searchpub

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne de termes électroniques et électriques. Il contient 20 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans 15 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

65 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.



TECHNICAL REPORT

RAPPORT TECHNIQUE

Guidance concerning the permissible temperature rise for parts of electrical equipment, in particular for terminals

Guide concernant l'échauffement admissible des parties des matériels électriques, en particulier les bornes de raccordement

[IEC TR 60943:1998+AMD1:2008 CSV](https://standards.iteh.ai/catalog/standards/sist/1a15b539-1d38-42e6-92f5-3e1f251fbbd8/iec-tr-60943-1998amd1-2008-csv)

<https://standards.iteh.ai/catalog/standards/sist/1a15b539-1d38-42e6-92f5-3e1f251fbbd8/iec-tr-60943-1998amd1-2008-csv>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 29.020

ISBN 978-2-8891-0335-5

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD	4
INTRODUCTION	6

Section 1: General

1 General	8
1.1 Scope and object	8
1.2 Reference documents	8
1.3 Definitions	9
1.4 Symbols	9

Section 2: Theory

2 General considerations concerning the nature of electric contact and the calculation and measurement of the ohmic resistance of contacts	10
2.1 Electric contacts and connection terminals	10
2.2 Nature of electric contact	10
2.3 Calculation of contact resistance	12
3 Ageing mechanisms of contacts and connection terminals	16
3.1 General	16
3.2 Contacts of dissimilar metals	17
3.3 Oxidation ageing mechanisms	19
3.4 Results concerning ageing of copper contacts	21
3.5 Usage and precautions to be taken in the use of contact materials	24
4 Calculation of temperature rise of conductors, contacts and connection terminals	25
4.1 Symbolic representations	25
4.2 Temperature rise ΔT_s of a conductor with respect to the temperature T_e of the surrounding medium	27
4.3 Temperature rise ΔT_o in the vicinity of the contact: temperature rise of connection terminals	28
4.4 Temperature rise of the elementary contact points	28

Section 3: Application

5 Permissible temperature and temperature rise values	29
5.1 Ambient air temperature θ_a	29
5.2 Temperature and temperature rise of various equipment components	30
5.3 Temperature and temperature rise of conductors connecting electrical equipment	38
5.4 Temperature and temperature rise of connection terminals for electrical equipment – Influence on connected conductors	39

6	General procedure to be followed for determining permissible temperature and temperature rise	40
6.1	Basic parameters.....	40
6.2	Method to be followed for determining maximum permissible temperature and temperature rise	40
Annex A	Numerical examples of the application of the theory and other data	42
Annex B	Physical characteristics of selected metals and alloys.....	45
Annex C	Physical characteristics of fluid dielectrics	46
Annex D	Information on the reaction of contact metals with substances in the atmosphere	47
Annex E	Temperature rise of a conductor cooled by radiation and convection in the vicinity of a terminal.....	48
Annex F	List of symbols used in this report	57
Annex G	Bibliography	59

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[IEC TR 60943:1998+AMD1:2008 CSV](#)

<https://standards.iteh.ai/catalog/standards/sist/1a15b539-1d38-42e6-92f5-3e1f251fbbd8/iec-tr-60943-1998amd1-2008-csv>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**GUIDANCE CONCERNING THE PERMISSIBLE TEMPERATURE RISE
FOR PARTS OF ELECTRICAL EQUIPMENT,
IN PARTICULAR FOR TERMINALS**

FOREWORD

- 1) The IEC (International Electrotechnical Commission) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of the IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, the IEC publishes International Standards. Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. The IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of the IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested National Committees.
- 3) The documents produced have the form of recommendations for international use and are published in the form of standards, technical reports or guides and they are accepted by the National Committees in that sense.
- 4) In order to promote international unification, IEC National Committees undertake to apply IEC International Standards transparently to the maximum extent possible in their national and regional standards. Any divergence between the IEC Standard and the corresponding national or regional standard shall be clearly indicated in the latter.
- 5) The IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with one of its standards.
- 6) Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. The IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. In exceptional circumstances, a technical committee may propose the publication of a technical report of one of the following types:

- type 1, when the required support cannot be obtained for the publication of an International Standard, despite repeated efforts;
- type 2, when the subject is still under technical development or where for any other reason there is the future but no immediate possibility of an agreement on an International Standard;
- type 3, when a technical committee has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

Technical reports of types 1 and 2 are subject to review within three years of publication to decide whether they can be transformed into International Standards. Technical reports of type 3 do not necessarily have to be reviewed until the data they provide are considered to be no longer valid or useful.

IEC 60943, which is a technical report of type 3, has been prepared by IEC technical committee 32: Fuses.

This consolidated version of the official IEC Standard and its amendment has been prepared for user convenience.

IEC 60943 edition 2.1 contains the second edition (1998) [documents 32/142/CDV and 32/148/RVC] and its amendment 1 (2008) [documents 32/187/DTR and 32/188/RVC].

A vertical line in the margin shows where the base publication has been modified by amendment 1.

Annexes are for information only.

The committee has decided that the contents of the base publication and its amendments will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[IEC TR 60943:1998+AMD1:2008 CSV](#)

<https://standards.iteh.ai/catalog/standards/sist/1a15b539-1d38-42e6-92f5-3e1f251fbbd8/iec-tr-60943-1998amd1-2008-csv>

INTRODUCTION

- a) The temperature rise encountered in electrical assemblies as a result of the various losses in the conductors, contacts, magnetic circuits, etc. is of growing importance as a result of the development of new techniques of construction and operation of equipment.

This development has been particularly significant in the field of assemblies, where numerous components dissipating energy (contactors, fuses, resistors, etc.), in particular modular devices are found within enclosures of synthetic materials which are somewhat impermeable to heat.

This temperature rise results in a relatively high temperature of the basic elements constituting the electric contacts: a high temperature favours oxidation at the contact interface, increases its resistance and thereby leads to further heating, and thus to an even higher temperature. If the component material of the contact is unsuitable or insufficiently protected, the contact may be irreparably damaged before the calculated useful life of the equipment has expired.

Such temperature rises also affect connection terminals and the connected conductors, and their effects should be limited in order to ensure that the insulation of the conductors remains satisfactory throughout the life of the installation.

- b) In view of these problems, this report has been prepared with the following objectives:
- to analyze the various heating and oxidation phenomena to which the contacts, the connection terminals and the conductors leading to them are subjected, depending on their environment and their arrangement;
 - to provide elementary rules to product committees to enable them to specify permissible temperatures and temperature rises.
- c) Attention is drawn to the precautions to be taken for sets of components when parts are grouped together in the same enclosure.

The attention of users should be drawn particularly to the fact that the temperature rise of terminals permitted by particular switchgear standards results from conventional situations during type tests; these can differ appreciably from the situations met with in practice, which have to be taken into account, particularly because of the temperatures permitted by the insulation of the conductors which may be connected to the terminals under normal conditions.

- d) Attention is drawn to the fact that in the relevant product standards, the permissible temperature and temperature rise for the external terminals are measured during conventional type tests and therefore they may not reflect the actual situation likely to occur in normal use.

Suitable precautions should then be adopted to avoid exposure to temperatures that may affect the life of materials adjacent to the terminals of components.

In this case, it is essential to distinguish the concept of "external ambient temperature" which prevails outside the enclosure from that of "the temperature of the fluid surrounding a part" which comprises the external ambient temperature plus the internal temperature rise due to the parts. These concepts, as well as other complementary concepts such as the thermal resistance of an enclosure, are dealt with in clause 5 and explained by means of numerical examples.

In order to facilitate complete calculation, this report links up the temperature of the fluid surrounding a component to the external ambient temperature by the introduction of the concept of "coefficient of filling" and gives a numerical example (5.2.3.2) which specifies the values of the coefficient of filling to be used in several practical cases.

The quantities involved in calculating contact constriction resistance are subject to wide variations due to the physical conditions and degree of contamination of the surface in contact. By calculation alone, therefore, the contact resistance can be estimated to an accuracy of no better than an order of magnitude.

More precise and more accurate values should be obtained by direct measurement on given items of electrical equipment, because in practice it is often the case that other incalculable degradation mechanisms predominate.

This report is not meant to give guidance on the derating of components.

It is strongly advised that the reference literature quoted at the end of this report be studied before attempting to apply the data to a practical problem.

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[IEC TR 60943:1998+AMD1:2008 CSV](#)

<https://standards.iteh.ai/catalog/standards/sist/1a15b539-1d38-42e6-92f5-3e1f251fbbd8/iec-tr-60943-1998amd1-2008-csv>

GUIDANCE CONCERNING THE PERMISSIBLE TEMPERATURE RISE FOR PARTS OF ELECTRICAL EQUIPMENT, IN PARTICULAR FOR TERMINALS

Section 1: General

1 General

1.1 Scope and object

This report is intended for guidance in estimating the permissible values for temperature and temperature rise of component parts of electrical equipment carrying current under steady state conditions.

This report applies to electrical power connections and materials adjacent to them.

This report is concerned with the thermal effects of currents passing through connections, therefore there are no voltage limits to its application.

This report is only applicable when referred to in the appropriate product standard.

The extent and manner to which the contents of this report are used in standards is the responsibility of individual Technical Committees.

Whenever "permissible" values are stated in this report, they mean values permitted by the relevant product standard.

The present report is intended to supply:

- general data on the structure of electric contacts and the calculation of their ohmic resistance;
- the basic ageing mechanisms of contacts;
- the calculation of the temperature rise of contacts and connection terminals;
- the maximum "permissible" temperature and temperature rise for various components, in particular the contacts, the connection terminals and the conductors connected to them;
- the general procedure to be followed by product committees for specifying the permissible temperature and temperature rise.

1.2 Reference documents

IEC 60050(441):1984, *International Electrotechnical Vocabulary (IEV) – Chapter 441: Switch-gear and controlgear and fuses*

IEC 60085:1984, *Thermal evaluation and classification of electrical insulation*

IEC 60216-1:1990, *Guide for the determination of thermal endurance properties of electrical insulating materials – Part 1: general guidelines for ageing procedures and evaluation of the test results*

IEC 60364-4-42:1980, *Electrical installations of buildings – Part 4: Protection for safety - Chapter 42: Protection against thermal effects*

IEC 60694:1996, *Common specifications for high-voltage switchgear and controlgear standards*

IEC 60721-2-1:1982, *Classification of environmental conditions – Part 2: environmental conditions appearing in nature. Temperature and humidity*

IEC 60890:1987, *A method of temperature-rise assessment by extrapolation for partially type-tested assemblies (PTTA) of low voltage switchgear and controlgear*

IEC 60947-1:1988, *Low-voltage switchgear and controlgear – Part 1: General rules*

1.3 Definitions

Definitions of terms used in this report may be found in the International Electrotechnical Vocabulary. For the purposes of this technical report, the following terms also apply:

1.3.1

ambient air temperature θ_a

the temperature, determined under prescribed conditions, of the air surrounding the complete device [IEV 441-11-13]

NOTE For devices installed inside an enclosure, it is the temperature of the air outside the enclosure.

1.3.2

contact (of a mechanical switching device)

conductive parts designed to establish circuit continuity when they touch and which, due to their relative motion during an operation, open or close a circuit or, in the case of hinged or sliding contacts, maintain circuit continuity [IEV 441-15-05]

NOTE Do not confuse with "IEV 441-15-06 Contact (piece): one of the conductive parts forming a contact."

1.3.3

connection (bolted or the equivalent)

two or more conductors designed to ensure permanent circuit continuity when forced together by means of screws, bolts, or the equivalent [3.5.10 of IEC 60694]

1.4 Symbols

A list of symbols used in this report is given in annex F.

Section 2: Theory

NOTE This theory applies to both "contacts" and "connections" as defined in 1.3.2 and 1.3.3. For convenience, only the word "contact" only is used in this section to cover both applications.

2 General considerations concerning the nature of electric contact and the calculation and measurement of the ohmic resistance of contacts

2.1 Electric contacts and connection terminals

Electric contact, in its simplest and most general configuration, results from contact established between two pieces of (usually metallic) conducting material. In the case of connection terminals, these are the terminal itself and the conductor which is connected to it.

The active zone is the contact "interface" which is the region where the current passes from one piece to the other. It is in this area that the contact resistance occurs, causing heating by Joule effect, and it is also where ageing occurs through chemical reaction with the surrounding atmosphere.

2.2 Nature of electric contact

When one piece of metal is applied to another, contact is not made over the whole apparent contact area, but only at a certain number of points called "elementary contacts".

The effective total cross-sectional area of these contacts is equal to the effective contact area S_a ¹⁾ if the possible presence of impurities is ignored (dust, etc.) at the contact interface.

There is also a fine layer of air or of oxide normally present, the effect of which upon the contact resistance will be examined later (see 2.3).

In the following, for ease of calculation and for a better understanding of the contact mechanisms, the simplifying assumption is made that there are n elementary contacts on the apparent contact area, uniformly distributed, of average constant radius a (see figure 1). The average distance between these elementary contacts is l .

The effective contact area is then:

$$S_a = n \pi a^2$$

1) For an explanation of the symbols used in this report, see annex F.

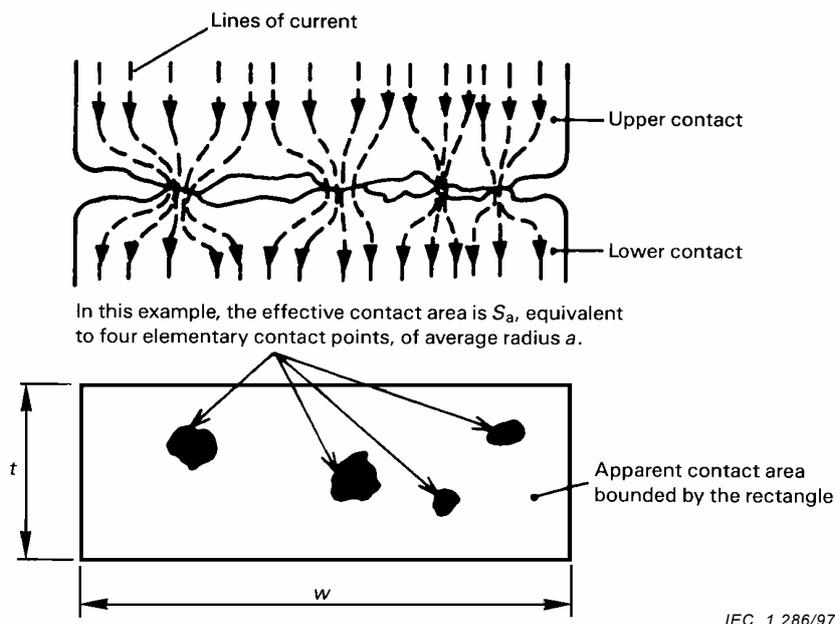


Figure 1 – Illustration of apparent contact and effective contact areas

The contact area S_a depends upon how hard the contacts are pressed against each other, i.e. upon the force applied, the surface state of the contacts, and the hardness of the material used.

For the forces normally found in electrical technology, the contact area is, in practice, the area over which the force applied reaches the ultimate strength of the contact material characterised by the "hardness" of that material.

In fact, the asperities on each of the two surfaces before they are brought into contact and which are due to previous preparation of the surface are of small dimension (of the order of 1/100 mm) and are crushed even by small forces of the order of 0,1 N.

Assuming that the pressure exerted upon the contact area is equal to the contact hardness of the metal (H), then the following equation is obtained:

$$\frac{F}{S_a} = \xi H$$

However, this equation applies only for a contact force of $F \geq 50$ N, in fact:

$$S_a = n\pi a^2 = \frac{F}{\xi H}$$

where ξ is a dimensionless "coefficient of flatness" dependent upon the state of the surfaces in contact, usually having a value of between 0,3 and 0,6 for normal forces, but which can be much smaller after extensive polishing of the contact surfaces against each other.

As a result, the elementary contact radius a is given by the equation:

$$a = \sqrt{\frac{F}{n\pi\xi H}} \quad (1)$$

The number n of elementary contacts can be worked out approximately by the formula:

$$n = n_k H^{0,625} F^{0,2} \tag{2}$$

where $n_k \approx 2,5 \times 10^{-5}$ (SI units)

The above expression gives only the order of magnitude of the number of elementary contacts. Values of n_k can differ significantly from the value estimated, for example between $0,5 \times 10^{-5}$ and 30×10^{-5} (SI units).


2.3 Calculation of contact resistance

Contact resistance is made up of two components:

- a) constriction resistance, due to the drawing together of the lines of current as they pass through the elementary contacts;
- b) film resistance, corresponding to the film of oxide or of adsorbed molecules at the interface.

2.3.1 Calculation of the constriction resistance

Consider (see figure 2) an idealised elementary contact of radius a . If the electrical conductors are large in relation to the elementary contact, the lines of current are hyperbolae with foci located at the ends of the elementary contact diameter and the equipotential surfaces are flattened ellipsoids of the same foci.

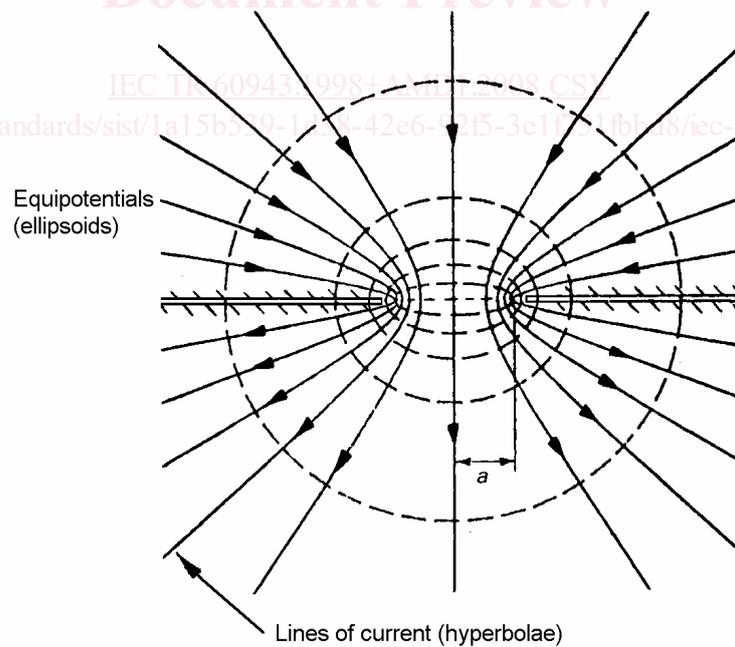

IEC 1 287/97

Figure 2 – Equipotentials and lines of current at an elementary contact point