



SLOVENSKI STANDARD

SIST EN 3653:2010

01-marec-2010

5 YfcbUj h_U!`NU_cj bY'a UhjWZgUa cnUdJfUbYZdfYa] bYZgUa cj Ufcj UbYŽ
YbcglfUbg_YZ]n`^Y`UŽ_UXa JfUbYŽa UnUbY'n`AcG&!`?`Ug]Z_UWU`-\$A DUfHf]
hYa dYfUi fj`c_c`jWZgUa) š7

Aerospace series - Nuts, anchor, self-locking, floating, self-aligning, one lug, in steel, cadmium plated, MoS2 lubricated - Classification: 900 MPa (at ambient temperature)/235 °C

STANDARD PREVIEW

Luft- und Raumfahrt - Anniemuttern, selbstsichernd, schwenkbar, einstellbar, einseitiger Flansch, aus Stahl, verkadmert, MoS2-geschmiert - Klasse: 900 MPa (bei Raumtemperatur)/235 °C

[SIST EN 3653:2010](https://standards.iteh.ai/catalog/standards/sist/fl1dab00-72ec-45b1-9ae7-11d0-01100000000000000000)

<https://standards.iteh.ai/catalog/standards/sist/fl1dab00-72ec-45b1-9ae7-11d0-01100000000000000000>

Série aérospatiale - Écrous à river, à freinage interne, flottants, orientables, simple patte, en acier, cadmiés, lubrifiés MoS2 - Classification: 900 MPa (à température ambiante)/235 °C

Ta slovenski standard je istoveten z: EN 3653:2010

ICS:

49.030.30 Matice Nuts

SIST EN 3653:2010 en,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3653:2010

<https://standards.iteh.ai/catalog/standards/sist/f11dab00-72ec-45b1-9ae7-c10bc7f459a7/sist-en-3653-2010>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 3653

January 2010

ICS 49.030.30

English Version

**Aerospace series - Nuts, anchor, self-locking, floating, self-aligning, one lug, in steel, cadmium plated, MoS₂ lubricated -
Classification: 900 MPa (at ambient temperature) / 235 °C**

Série aérospatiale - Écrous à river, à freinage interne, flottants, orientables, simple patte, en acier, cadmiés, lubrifiés MoS₂ - Classification: 900 MPa (à température ambiante) / 235 °C

Luft- und Raumfahrt - Anniemuttern, selbstsichernd, schwenkbar, einstellbar, einseitiger Flansch, aus Stahl, verkadmet, MoS₂-geschmiert - Klasse : 900 MPa (bei Raumtemperatur) / 235 °C

This European Standard was approved by CEN on 4 December 2009.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	3
1 Scope	4
2 Normative references	4
3 Required characteristics.....	4
4 Designation	7
5 Marking	7
6 Technical specification	7

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 3653:2010](https://standards.iteh.ai/catalog/standards/sist/fl1dab00-72ec-45b1-9ae7-c10bc7f459a7/sist-en-3653-2010)

<https://standards.iteh.ai/catalog/standards/sist/fl1dab00-72ec-45b1-9ae7-c10bc7f459a7/sist-en-3653-2010>

Foreword

This document (EN 3653:2010) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by July 2010, and conflicting national standards shall be withdrawn at the latest by July 2010.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

ITEH STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3653:2010

<https://standards.iteh.ai/catalog/standards/sist/fl1dab00-72ec-45b1-9ae7-c10bc7f459a7/sist-en-3653-2010>

EN 3653:2010 (E)**1 Scope**

This standard specifies the characteristics of one lug, floating, self-aligning anchor nuts with a self-locking feature achieved by forming the upper portion out of round, in steel, cadmium plated, MoS₂ lubricated.

Classification: 900 MPa¹⁾ / 235 °C²⁾.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2133, *Aerospace series — Cadmium plating of steels with specified tensile strength $\leq 1\,450$ MPa, copper, copper alloys and nickel alloys*

EN 2424, *Aerospace series — Marking of aerospace products*

EN 2491, *Aerospace series — Molybdenum disulphide dry lubricants — Coating methods*

EN 2542, *Aerospace series — Steel FE-PL1502 (25CrMo4) — Annealed — Bar and wire — $D_e \leq 40$ mm — For prevailing torque nuts.*

EN 2543, *Aerospace series — Steel FE-PL1502 (25CrMo4) — Annealed — Sheet and strip — $0,3\text{ mm} \leq a \leq 2\text{ mm}$ — For prevailing torque nuts*

EN 9100, *Quality Management Systems — Requirements for Aviation, Space and Defense Organizations*

EN 9133, *Aerospace series — Quality management systems — Qualification procedure for aerospace standard parts*

TR 3791, *Aerospace series — Materials for self-locking nuts, threaded inserts and screw thread inserts of temperature classes ≤ 425 °C³⁾*

ISO 5855-2, *Aerospace — MJ threads — Part 2: Limit dimensions for bolts and nuts*

ISO 5858, *Aerospace — Nuts, self-locking, with maximum operating temperature less than or equal to 425 °C — Procurement specification*

ISO 8788, *Aerospace — Nuts, metric — Tolerances of form and position*

3 Required characteristics**3.1 Configuration — Dimensions — Masses**

See Figure 1 and Table 1.

1) Corresponds to strength class of the associated bolt, the 100 % load of which it is able to withstand, when tested at ambient temperature, without breaking or cracking.

2) Maximum temperature that the nut is able to withstand, without permanent alteration to its original characteristics, after ambient temperature has been restored. The maximum temperature is conditioned by the surface treatment.

3) Published as ASD-STAN Technical Report at the date of publication of this standard.

Dimensions and tolerances are expressed in millimetres and apply after cadmium plating but before MoS₂ lubrication.

3.2 Materials

EN 2542, EN 2543 or TR 3791.

3.3 Surface treatment


EN 2133, 5 µm minimum on threads and all surfaces which can be contacted by a 20 mm diameter ball. On all other surfaces a continuous cadmium plating shall be present, plus EN 2491, thickness not specified.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 3653:2010](https://standards.iteh.ai/catalog/standards/sist/fl1dab00-72ec-45b1-9ae7-c10bc7f459a7/sist-en-3653-2010)

<https://standards.iteh.ai/catalog/standards/sist/fl1dab00-72ec-45b1-9ae7-c10bc7f459a7/sist-en-3653-2010>

EN 3653:2010 (E)




These values in micrometres, apply before surface treatment. The values do not apply to threads and sheared edges the surface texture of which will be achieved by usual manufacturing methods.

Remove sharp edges 0,1 to 0,4.

Details of form not stated are at the manufacturer's option.

Tolerances of form and position shall be conformity with ISO 8788.

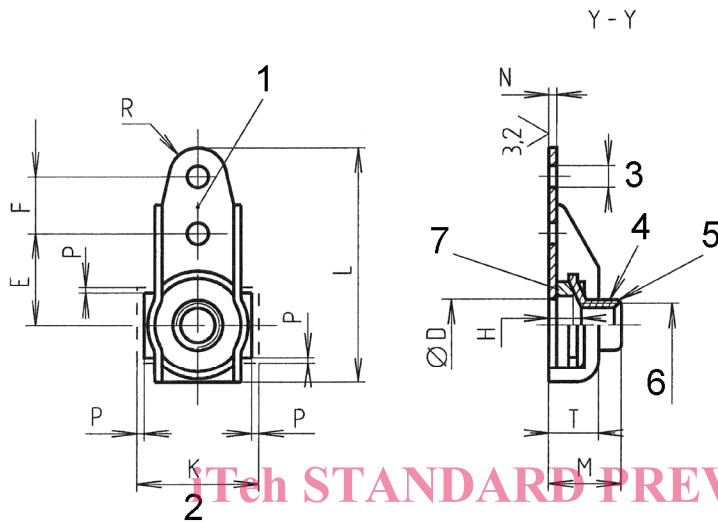

STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3653:2010
<https://standards.iteh.ai/catalog/standards/sist/fl1dab00-72ec-45b1-9ae7-2101-7f139a7/sist-en-3653-2010>



Key

- 1 Marking
- 2 Float included
- 3 Two holes $\varnothing J$
- 4 Threaded element
- 5 Form out of round in this area to achieve the self-locking torque requirement. Tolling marks are permitted in this area.
- 6 Thread
- 7 Convex washer
- 8 8° min. any direction

Figure 1