

SLOVENSKI STANDARD

PSIST ETS 300 103:1996

01-oktober-1996

Digitalno omrežje z integriranimi storitvami (ISDN) - Podpora ISDN za podatkovne terminalske opreme (DTE), ki temelje na priporočilih CCITT X.21, X.21 bis in X.20 bis - Funkcije sinhronih in asinhronih terminalskeh prilagodilnikov

Integrated Services Digital Network (ISDN); Support of CCITT Recommendation X.21, X.21 bis and X.20 bis based Data Terminal Equipments (DTEs) by an ISDN
Synchronous and asynchronous terminal adaptation functions


Ta slovenski standard je istoveten z: ETS 300 103 Edition 1

ICS:

33.080	Digitalno omrežje z integriranimi storitvami (ISDN)	Integrated Services Digital Network (ISDN)
--------	---	--

PSIST ETS 300 103:1996

en

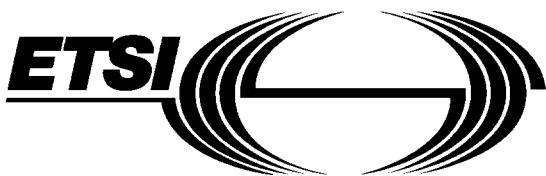

**EUROPEAN
TELECOMMUNICATION
STANDARD**

ETS 300 103

December 1990

Source: ETSI TC-SPS

Reference: T/S 46-40 [CD]

ICS: 33.080

Key words: ISDN, DTE, Terminal adaption

**Integrated Services Digital Network (ISDN);
Support of CCITT Recommendation X.21, X.21 bis and X.20 bis
based Data Terminal Equipments (DTEs) by an ISDN;
Synchronous and asynchronous terminal adaption functions**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - Internet: secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Page 2
ETS 300 103: December 1990

Contents

Foreword	7
Scope	9
1 Reference configurations	10
1.1 Customer access configuration	10
1.2 Network configuration	11
1.3 Interworking situation.....	12
2 Terminal adaption functions	13
2.1 Adaption function for DTEs conforming to X.1 user classes of service 3 to 6.....	13
2.1.1 Bit rate adaption functions.....	13
2.1.1.1 General approach.....	13
2.1.1.2 First step of rate adaption (RA1) of X.1 rates to the intermediate rates of 8/16 kbit/s	13
2.1.1.2.1 Frame structure	13
2.1.1.2.2 Frame synchronization	14
2.1.1.2.3 Status bits SP, SQ, SR	14
2.1.1.2.4 Additional signalling capacity (E bit)	15
2.1.1.2.5 Data bits.....	16
2.1.1.2.6 Repetition strategy.....	16
2.1.1.3 Second step of rate adaption (RA2)	19
2.1.1.4 Framing/reframing method and user rate identification	19
2.1.1.4.1 Search for frame alignment	19
2.1.1.4.2 Alignment monitoring/recovery	20
2.1.1.4.3 Identification of intermediate bit rate.....	20
2.1.2 X.21/X.21bis to D-channel protocol mapping.....	20
2.1.2.1 D-channel protocol to X.21 mapping (see figures 8 and 9)	21
2.1.2.1.1 SETUP (from terminal adaptor to the network)	21
2.1.2.1.2 SETUP ACKNOWLEDGE/CALL PROCEEDING (from network)	22
2.1.2.1.3 ALERTING (from network)	22
2.1.2.1.4 CONNECT (from network)	22
2.1.2.1.5 SETUP (from network)	22
2.1.2.1.6 CONNECT (from terminal adaptor)	23
2.1.2.1.7 CONNECT ACKNOWLEDGE (from network).....	23
2.1.2.1.8 RELEASE (from network).....	23
2.1.2.1.9 DISCONNECT (from terminal adaptor).....	23
2.1.2.1.10 DISCONNECT (from network)	24
2.1.2.1.11 RELEASE COMPLETE (from network).....	24
2.1.2.2 X.21bis (direct call), V.25 and V.25bis.....	24
2.1.3 Call offering procedure in a multiterminal configuration.....	24
2.1.4 Ready for data Alignment.....	30
2.1.5 Mapping of ETS 300 102-1 causes to X.21 call progress signals.....	32
2.1.6 Additional information for handling of exception situations	33
2.1.6.1 Call collision	33
2.1.6.1.1 Call collision at the X.21 interface.....	33
2.1.6.1.2 Call collision at the S/T reference point	33
2.1.6.2 No channel available	34
2.1.6.3 Premature clearing	34
2.1.6.4 No answer to outgoing SETUP.....	34

2.2	Adaption functions for DTEs conforming to X.1 user class service 7	34
2.2.1	Bit rate adaption functions	34
2.2.2	X.21/X.21bis to D-channel protocol mapping	35
2.2.3	Call offering procedure in a multiterminal configuration	35
2.2.4	Ready for data Alignment	35
2.2.5	Mapping of Q.931 causes to X.21 call progress signals.....	35
2.2.6	Additional information for handling of exceptional situations.....	35
2.3	Rate adaption functions for DTEs conforming to X.1 user class of service 19	35
2.3.1	Rate adaption functions	35
2.3.2	X.21/X.21bis to D-channel protocol mapping (see figures 8 and 9)	35
2.3.2.1	SETUP (from terminal adaptor)	35
2.3.2.2	SET-UP ACKNOWLEDGE/CALL PROCEEDING (from network)	36
2.3.2.3	ALERTING (from exchange).....	36
2.3.2.4	CONNECT (from network).....	36
2.3.2.5	SETUP (from network).....	36
2.3.2.6	CONNECT (from terminal adaptor)	37
2.3.2.7	CONNECT ACKNOWLEDGE (from network)	37
2.3.2.8	RELEASE (from network) (multipoint configuration).....	37
2.3.2.9	DISCONNECT (from terminal adaptor)	37
2.3.2.10	DISCONNECT (from network).....	37
2.3.2.11	RELEASE COMPLETE (from network)	38
2.3.3	Call offering procedure in a multiterminal configuration	38
2.3.4	Ready for data Alignment	38
2.3.4.1	Entering the data transfer phase.....	38
2.3.4.2	Leaving the data transfer phase	39
2.3.5	Mapping of Q.931 causes to X.21 call progress signals.....	40
2.3.6	Additional information for handling of exception situations.....	40
2.4	Adaption function for DTEs conforming to X.1 user classes of service 1 and 2 or other asynchronous user bit rates	41
2.4.1	Rate adaption functions	41
2.4.1.1	General approach	41
2.4.1.2	Supported asynchronous user rates	42
2.4.1.3	Asynchronous-to-synchronous conversion (RAO).....	42
2.4.1.4	Adaption to the B-channel rate.....	43
2.4.1.5	Break signal	43
2.4.1.6	Overspeed/underspeed	43
2.4.1.7	Parity bits	43
2.4.2	Flow control	43
3	Test loops	43
	Annex A (normative): Interchange circuits used in this specification.....	44
1	Essential and optional interchange circuits.....	44
2	Timing arrangement	44
3	Circuit 106.....	44
4	Circuit 109.....	44
5	Electrical/mechanical characteristics of interchange circuits.....	46
5.1	Basic ISDN user/network interface	46
5.2	TE2/TA (DTE/DCE) interface	46
5.2.1	Rates less than or equal to 19.2 kbit/s.....	46
5.2.2	Rates greater than 19.2 kbit/s.....	46
6	Fault Conditions on interchange circuits.....	46

Annex B (normative):	X.21 Terminal adaptors - Ready for data alignment procedures	47
1	General.....	47
2	Ready for data alignment for user rates of 600, 1200, 2400, 4800, 7200, 9600, 14400, 19200 and 48000 bit/s	48
2.1	X.21 switched circuit interface	48
2.1.1	Procedures at calling TA	48
2.1.2	Procedures at Called TA	49
2.2	X.21 Leased circuit interface	50
2.2.1	Procedures at Calling TA	50
2.2.2	Procedures at called TA	51
3	Ready for data alignment for user rates of 64 Kbit/s.....	52
3.1	Procedures at calling TA.....	52
3.2	Procedures at called TA	53
Annex C (normative):	Message functional definitions and contents, applicable at the interface at the coincident S and T reference point.....	65
1	Alerting	66
2	Call proceeding	67
3	Connect	68
4	Connect acknowledge.....	69
5	Disconnect.....	70
6	Information	71
7	Notify	72
8	Progress	73
9	Release	74
10	Release complete.....	75
11	SETUP	76
12	SETUP ACKNOWLEDGE.....	78
13	STATUS	79
Annex D:	Asynchronous DTE TA operating sequences	80
1	TA duplex operation	80
1.1	IDLE (or Ready) state	80
1.2	Connect TA to line state.....	80
1.3	Data transfer state	81
1.4	Disconnect mode	82
1.5	Loss of frame synchronization	82
2	TA half-duplex operation	83
3	Automatic calling	83

Page 6**ETS 300 103: December 1990**

Annex E (normative):	Timer values	84
Annex F (normative):	SDL diagrams for the protocol mapping of X.21 TA's	85
1	General.....	85
2	The formal description.....	85
Annex G (informative):	Flow control option for Asynchronous DTE TA's	93
1	Local flow control: TA to DTE	93
1.1	105/106 operation	93
1.2	X ON/X OFF operation.....	93
1.3	Other methods	93
2	End-to-end flow control: TA to TA	93
3	Use of channel capacity.....	94
4	Requirements for a TA supporting flow control	94
Annex H (informative):	Network independent clocking.....	95
1	General.....	95
2	Measurement of phase differences	95
3	Positive/negative compensation	96
4	Encoding.....	97
Annex I (informative):	BC, HLC and LLC information element coding examples applicable to user specific applications	98
1	Support of Terminal Adaptors V.110/X.30.....	98
1.1	Synchronous mode of operation	98
1.1.1	Request by a calling terminal equipment.....	98
1.1.2	Compatibility at the called terminal equipment	100
1.2	Asynchronous mode of operation	102
1.2.1	Request by a calling terminal equipment.....	102
1.2.2	Compatibility at the called terminal equipment	104
History		106