

9`Y\_fca U[ bYfbUnXfi y`^j cghfØ A7 L]b`nUXYj Yj `nj Yn]`n`fUX]`g\_ Ja `gdY\_fca `fØ FA L!  
GHUbXUfX`YY\_fca U[ bYfbY`nXfi y`^j cgh]`fØ A7 L`nUfUX]`g\_c`cdfYa c`]b`ghcf]`hj Y!`%&"  
XY. `DcgYVb]`dc[ c`]`nUgUHY]`rg\_Y`hYfa ]bUY`n`ia Ub`yc`UbhYbcž]`bhYfU`\_hj bY`nYa Y`g\_Y  
gUHY]`rg\_Y`dcgU`Yž\_]`XYi `Y`c`j`Z`Y`\_Yb b]`dUgcj`\_]`Z`\_gb]`gUHY]`rg\_]`ghcf]`hYj  
fl GGL(` ; <n`]b`" \$; <n

Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 12: Specific conditions for Very Small Aperture Terminal, Satellite Interactive Earth Stations operated in the frequency ranges between 4 GHz and 30 GHz in the Fixed Satellite Service (FSS)

[SIST EN 301 489-12 V1.2.1:2004](https://standards.iteh.ai/catalog/standards/sist/3b0ba62a-fdcb-4c2f-a6ef-4515ae3d5da4/sist-en-301-489-12-v1-2-1-2004)

<https://standards.iteh.ai/catalog/standards/sist/3b0ba62a-fdcb-4c2f-a6ef-4515ae3d5da4/sist-en-301-489-12-v1-2-1-2004>

**Ta slovenski standard je istoveten z: EN 301 489-12 Version 1.2.1**

**ICS:**

33.060.30	Radiorelejni in fiksni satelitski komunikacijski sistemi	Radio relay and fixed satellite communications systems
33.100.01	Elektromagnetna združljivost na splošno	Electromagnetic compatibility in general

**SIST EN 301 489-12 V1.2.1:2004**      **en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST EN 301 489-12 V1.2.1:2004](https://standards.iteh.ai/catalog/standards/sist/3b0ba62a-fdcb-4c2f-a6ef-4515ae3d5da4/sist-en-301-489-12-v1-2-1-2004)

<https://standards.iteh.ai/catalog/standards/sist/3b0ba62a-fdcb-4c2f-a6ef-4515ae3d5da4/sist-en-301-489-12-v1-2-1-2004>

# ETSI EN 301 489-12 V1.2.1 (2003-05)

---

*Candidate Harmonized European Standard (Telecommunications series)*

**Electromagnetic compatibility  
and Radio spectrum Matters (ERM);  
ElectroMagnetic Compatibility (EMC)  
standard for radio equipment and services;  
Part 12: Specific conditions for Very Small Aperture  
Terminal, Satellite Interactive Earth Stations operated  
in the frequency ranges between 4 GHz and 30 GHz  
in the Fixed Satellite Service (FSS)**

---

**iTeh STANDARD PREVIEW  
(standards.iteh.ai)**

[SIST EN 301 489-12 V1.2.1:2004](https://standards.iteh.ai/catalog/standards/sist/3b0ba62a-fdcb-4c2f-a6ef-4515ae3d5da4/sist-en-301-489-12-v1-2-1-2004)

<https://standards.iteh.ai/catalog/standards/sist/3b0ba62a-fdcb-4c2f-a6ef-4515ae3d5da4/sist-en-301-489-12-v1-2-1-2004>



---

Reference

REN/ERM-EMC-230-12

---

Keywords

earth station, EMC, FSS, radio, regulation,  
satellite, SNG, testing, VSAT

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 301 489-12 V1.2.1:2004

<https://standards.iteh.ai/catalog/standards/sist/3b0ba62a-fdcb-4c2f-a6ef-4515ae3d5d47/sist-en-301-489-12-v1-2-1-2004>

**Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

[editor@etsi.org](mailto:editor@etsi.org)

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2003.  
All rights reserved.

DECT™, PLUGTESTS™ and UMTS™ are Trade Marks of ETSI registered for the benefit of its Members.  
TIPHON™ and the TIPHON logo are Trade Marks currently being registered by ETSI for the benefit of its Members.  
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

# Contents

Intellectual Property Rights .....	5
Foreword.....	5
1 Scope .....	6
2 References .....	6
3 Definitions and abbreviations.....	7
3.1 Definitions .....	7
3.2 Abbreviations .....	7
4 Test conditions .....	7
4.1 General .....	7
4.2 Arrangements for test signals .....	8
4.2.1 Arrangements for test signals at the input of transmitters.....	8
4.2.2 Arrangements for test signals at the output of transmitters.....	8
4.2.3 Arrangements for test signals at the input of receivers .....	8
4.2.4 Arrangements for test signals at the output of receivers .....	8
4.2.5 Arrangements for testing transmitter and receiver together (as a system) .....	8
4.3 Exclusion bands.....	8
4.4 Narrow band responses of receivers.....	8
5 Performance assessment.....	9
5.1 General .....	9
5.2 Equipment configuration(s).....	9
5.3 Equipment classification .....	10
6 Performance criteria .....	10
6.1 Performance criteria (C) for Continuous phenomena applied to the EUT .....	10
6.2 Performance criteria (TA) for Transient phenomena applied to a grade A EUT .....	11
6.3 Performance criteria (TB) for Transient phenomena applied to a grade B EUT .....	11
7 Applicability overview .....	12
7.1 Emission.....	12
7.1.1 General.....	12
7.1.2 Special conditions.....	12
7.2 Immunity .....	12
7.2.1 General.....	12
7.2.2 Special conditions.....	12
<b>Annex A (normative):</b> <b>Definitions of Satellite Earth Stations (ES) within the scope of the present document.....</b>	<b>14</b>
A.1 Transmit only and Transmit and receive Ku band VSATs .....	14
A.2 Receive-only Ku band VSATs .....	14
A.3 Transmit only and Transmit and receive C band VSATs.....	15
A.4 Receive-only C band VSATs .....	15
A.5 Satellite News Gathering (SNG) Ku band Transportable Earth Stations (TESs).....	16
A.6 Satellite Interactive Terminals (SITs) .....	17
A.7 Satellite User Terminals (SUTs) transmitting in the frequency range 29,5 GHz to 30,0 GHz .....	17
A.8 Satellite User Terminals (SUTs) transmitting in the frequency range 27,5 GHz to 29,5 GHz .....	18
<b>Annex B (informative):</b> <b>Bibliography .....</b>	<b>19</b>
<b>Annex C (informative):</b> <b>The EN title in the official languages .....</b>	<b>20</b>

History .....21

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST EN 301 489-12 V1.2.1:2004](https://standards.iteh.ai/catalog/standards/sist/3b0ba62a-fdcb-4c2f-a6ef-4515ae3d5da4/sist-en-301-489-12-v1-2-1-2004)

<https://standards.iteh.ai/catalog/standards/sist/3b0ba62a-fdcb-4c2f-a6ef-4515ae3d5da4/sist-en-301-489-12-v1-2-1-2004>

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

All published ETSI deliverables shall include information which directs the reader to the above source of information.

---

## Foreword

This Candidate Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM).

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC [4] (as amended) laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document, together with EN 301 489-1 [1], is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Council Directive on the approximation of the laws of the Member States relating to electromagnetic compatibility ("the EMC Directive") (89/336/EEC [3] as amended) and Directive 1999/5/EC [2] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive").

The present document is part 12 of a multi-part deliverable. Full details of the entire series can be found in part 1 [1].

SIST EN 301 489-12 V1.2.1:2004

<https://standards.iteh.ai/catalog/standards/sist/3b0ba62a-fdcb-4c2f-a6ef-4515ae3d5da4/sist-en-301-489-12-v1-2-1-2004>  
**National transition dates**

Date of adoption of this EN:	25 April 2003
Date of latest announcement of this EN (doa):	31 July 2003
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 January 2004
Date of withdrawal of any conflicting National Standard (dow):	31 July 2006

---

## 1 Scope

The present document, together with EN 301 489-1 [1], covers the assessment of Earth Stations (ES) operated in the frequency ranges between 4 GHz and 30 GHz in the Fixed Satellite Service (FSS) and associated ancillary equipment in respect of Electromagnetic Compatibility (EMC).

Technical specifications related to the antenna port and emissions from the enclosure port of the Earth Stations (ES) are not included in the present document. Such technical specifications are found in the relevant product standards for the effective use of the radio spectrum.

The present document specifies the applicable test conditions, performance assessment and the performance criteria for the ESs, and associated ancillary equipment.

Definitions of the type of Earth Stations (ES) operated in the frequency ranges between 4 GHz and 30 GHz in the Fixed Satellite Service (FSS) covered by the present document are given in annex A.

In case of differences (for instance concerning special conditions, definitions, abbreviations) between the present document and EN 301 489-1 [1], the provisions of the present document take precedence.

The environmental classification and the emission and immunity requirements used in the present document are as stated in EN 301 489-1 [1], except for any special conditions included in the present document. The applicable environments referred to in EN 301 489-1 [1] where equipment covered by the scope of the present document may be used, shall be declared by the manufacturer.

---

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

- [1] ETSI EN 301 489-1: "Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements".
- [2] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).
- [3] Council Directive 89/336/EEC of 3 May 1989 on the approximation of the laws of the Member States relating to electromagnetic compatibility (EMC Directive).
- [4] Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.



## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in EN 301 489-1 [1] and the following apply:

**carrier-on state:** transmit ES is in this state when it is authorized to transmit, and when it transmits a signal, either authorized by a Centralized Control and Monitoring Function (CCMF) or a Network Control Facility (NCF) when designed for unattended operation or by local control when designed for attended operation

**carrier-off state:** transmit ES is in this state when it is authorized to transmit, and when it does not transmit any signal, either authorized by a CCMF or a NCF when designed for unattended operation or by local control when designed for attended operation

NOTE: The existence of a carrier-off state depends on the system of transmission used. For ES designed for continuous transmission mode there may be no carrier-off state.

**transmission disabled state:** transmit ES is in this state when it is not authorized to transmit either by a CCMF or a NCF respectively when designed for unattended operation or by local control when designed for attended operation

### 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CCMF	Centralized Control and Monitoring Functions
CMF	Control and Monitoring Functions
EIRP	Equivalent Isotropically Radiated Power
EMC	ElectroMagnetic Compatibility
ES	Earth Station
EUT	Equipment Under Test
FSS	Fixed Satellite Service
LNB	Low Noise Block converter
NCF	Network Control Facility
QTMA	Quality of Transmission Measurement Apparatus
RF	Radio Frequency
SIT	Satellite Interactive Terminals
SNG	Satellite News Gathering
SUT	Satellite User Terminals
TES	Transportable Earth Station
VSAT	Very Small Aperture Terminal

## 4 Test conditions

For the purposes of the present document, the test conditions of EN 301 489-1 [1], clause 4 shall apply as appropriate. Further product type related test conditions for Earth Stations are specified in the present document.

### 4.1 General

For Earth Stations with or without ancillary equipment, and/or various terrestrial ports, the number of test configurations shall be determined. The assessment shall include sufficient representative configurations of the ES to adequately exercise the equipment. These configurations shall be recorded in the test report.

In the following clauses, the Equipment Under Test (EUT) is an ES with the selected configuration of ancillary equipment.

## 4.2 Arrangements for test signals

The provisions of EN 301 489-1 [1], clause 4.2 shall apply with the following modifications.

In order to measure the unwanted emissions and electromagnetic immunity under operational conditions, the following arrangements shall be provided by the manufacturer:

- a) a special test equipment to put the ES terminal in its normal operating mode, and providing the ES with a receive signal to emulate the operational conditions of reception. This equipment shall control the EUT, when it is capable of transmission, so that it switches between the transmission disabled, carrier-on and carrier-off states;
- b) the specific Quality of Transmission Measurement Apparatus (QTMA).

For the measurement of the quality of transmission a communications link shall be established and the wanted input signal shall be applied to the Radio Frequency (RF) input of the receiver via the antenna.

The special test equipment, the QTMA and the source of the wanted input signal shall be located outside the test environment. Adequate measures shall be taken to protect them from the effects of all the radiated fields within the test environment.

### 4.2.1 Arrangements for test signals at the input of transmitters

The provisions of EN 301 489-1 [1], clause 4.2.1 shall apply.

### 4.2.2 Arrangements for test signals at the output of transmitters

The provisions of EN 301 489-1 [1], clause 4.2.2 shall apply.

### 4.2.3 Arrangements for test signals at the input of receivers

The provisions of EN 301 489-1 [1], clause 4.2.3 shall apply with the following modification.

For tests on the receiver, the level of the signal received from the test transmitter shall be as close as possible to the normal operation level of the EUT receiver.

### 4.2.4 Arrangements for test signals at the output of receivers

The provisions of EN 301 489-1 [1], clause 4.2.4 shall apply.

### 4.2.5 Arrangements for testing transmitter and receiver together (as a system)

The provisions of EN 301 489-1 [1], clause 4.2.5 shall apply.

## 4.3 Exclusion bands

There are no exclusion bands for ESs within in the scope of the present document.

## 4.4 Narrow band responses of receivers

Narrow band responses are not allowed for ESs within in the scope of the present document.

## 5 Performance assessment

### 5.1 General

The provision of EN 301 489-1 [1], clause 5.1 shall apply.

In addition the manufacturer shall provide the following information to be recorded in the test report:

- the dedicated grade (A or B) for the ES in accordance with the information contained in the instructions accompanying the ES (see clause 5.3);
- the ranges of the operational parameters, e.g. the power delivered to the antenna, the frequency ranges;
- the minimum quality of transmission, and the method to be used to assess it.

This information shall be in accordance with the documentation accompanying the equipment.

### 5.2 Equipment configuration(s)

For radiation measurements in carrier-on state, the ES shall be put in a continuous transmit mode or to the maximum burst rate where applicable. The ES shall be operated at the highest normal operating Equivalent Isotropically Radiated Power (EIRP) or, if that is the maximum attainable, then 3 dB below such maximum.

A suggested test configuration is shown in figure 1.

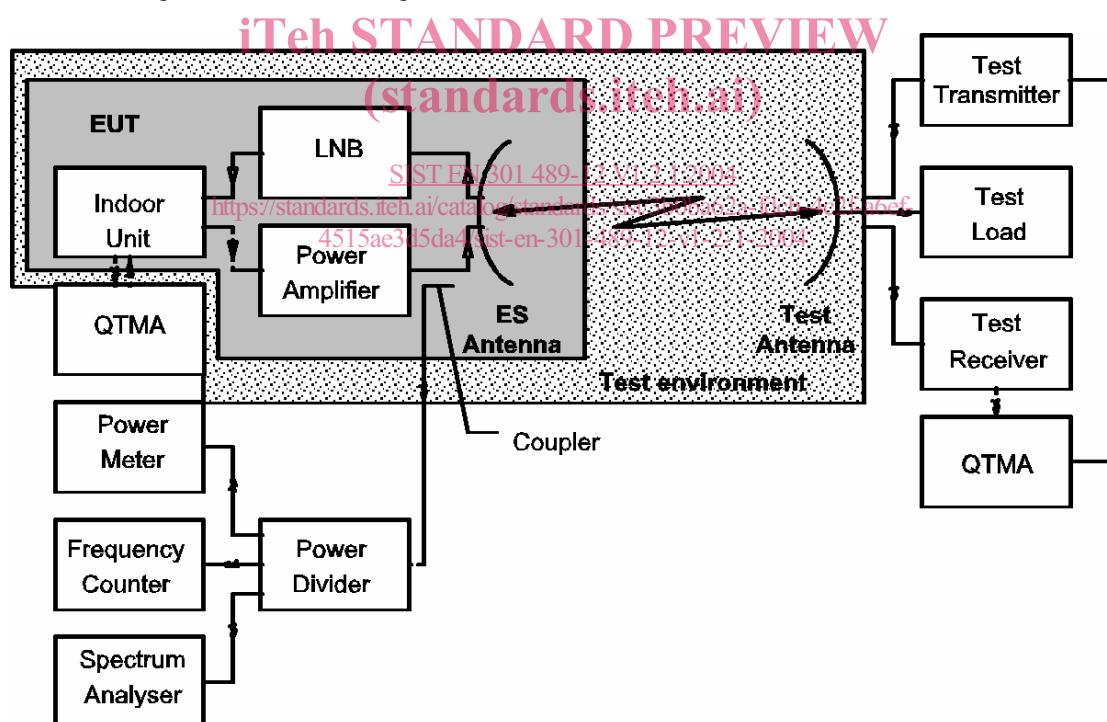


Figure 1: Suggested test configuration

For the tests, the ES antenna reflector and the test antenna may be removed at their flanges and be replaced by one direct wave guide connection.