

SLOVENSKI STANDARD
SIST EN 4178:2010**01-januar-2010**

Aeronavtika - Vijaki, valjasta glava, šestzoba vdolbina, široka toleranca, srednja navojna dolžina, iz titanove zlitine, anodizirani, mazani z MoS2 - 1100 MPa (pri temperaturi okolice)/315 °C

Aerospace series - Screws, pan head, six lobe recess, coarse tolerance normal shank, medium length thread, in titanium alloy, anodized, MoS2 lubricated - 1100 MPa (at ambient temperature)/315 °C

Luft- und Raumfahrt - Flachkopfschrauben mit Sechsbogenzahn; mit mittlerer Gewindelänge, aus Titanlegierung, anodisiert, MoS2-geschmiert - 1100 MPa (bei Raumtemperatur)/315 °C

Série aérospatiale - Vis à tête cylindrique, à empreinte six lobes, tige normale à tolérance large, filetage moyen, en alliage de titane, anodisées, lubrifiées MoS2 - 1100 MPa (à température ambiante)/315 °C

Ta slovenski standard je istoveten z: EN 4178:2009

ICS:

49.030.10 Navoji Screw threads

SIST EN 4178:2010**en**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 4178:2010

<https://standards.iteh.ai/catalog/standards/sist/5eb68733-712f-4ab3-b6c6-fae6f94c0d2e/sist-en-4178-2010>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 4178

November 2009

ICS 49.030.10

English Version

Aerospace series - Screws, pan head, six lobe recess, coarse tolerance normal shank, medium length thread, in titanium alloy, anodized, MoS2 lubricated - 1 100 MPa (at ambient temperature) / 315 °C

Série aérospatiale - Vis à tête cylindrique, à empreinte six lobes, tige normale à tolérance large, filetage moyen, en alliage de titane, anodisées, lubrifiées MoS2 - 1 100 MPa (à température ambiante) / 315 °C

Luft- und Raumfahrt - Flachkopfschrauben mit Sechsbogenzahn; mit mittlerer Gewindelänge, aus Titanlegierung, anodisiert, MoS2-geschmiert - 1 100 MPa (bei Raumtemperatur) / 315 °C

This European Standard was approved by CEN on 17 September 2009.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

[SIST EN 4178:2010](https://standards.iteh.ai/catalog/standards/sist/5eb68733-712f-4ab3-b6c6-12a49f122222/en-4178:2009)

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents		Page
Foreword.....		3
1	Scope	4
2	Normative references	4
3	Required characteristics	5
3.1	Configuration – Dimensions – Masses	5
3.2	Tolerances of form and position	5
3.3	Materials	5
3.4	Surface treatment	5
4	Designation	8
5	Marking	8
6	Technical specification	8

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 4178:2010](https://standards.iteh.ai/catalog/standards/sist/5eb68733-712f-4ab3-b6c6-fae6f94c0d2e/sist-en-4178-2010)

<https://standards.iteh.ai/catalog/standards/sist/5eb68733-712f-4ab3-b6c6-fae6f94c0d2e/sist-en-4178-2010>

Foreword

This document (EN 4178:2009) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2010, and conflicting national standards shall be withdrawn at the latest by May 2010.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

ITEH STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 4178:2010

<https://standards.iteh.ai/catalog/standards/sist/5eb68733-712f-4ab3-b6c6-fae6f94c0d2e/sist-en-4178-2010>

EN 4178:2009 (E)**1 Scope**

This European Standard specifies the characteristics of screws, pan head, six lobe recess, coarse tolerance normal shank, medium length thread, in titanium alloy, anodized, MoS₂ lubricated.

Classification : 1 100 MPa¹⁾ / 315 °C²⁾.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applied. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2424, *Aerospace series — Marking of aerospace products*

EN 2491, *Aerospace series — Molybdenum disulphide dry lubricants — Coating methods*

EN 3042, *Aerospace series — Quality assurance — EN aerospace products — Qualification procedure*

EN 3911, *Aerospace series — Six lobe recess — Geometrical definition³⁾*

EN 9100, *Quality Management Systems — Requirements for Aviation, Space and Defense Organizations*

TR 3775, *Aerospace series — Bolts and pins — National materials⁴⁾*

TR 4070, *Aerospace series — Molybdenum disulphide dry lubricants — List of commercial products⁴⁾*

ISO 3353-1, *Aerospace — Lead and runout threads — Part 1: Rolled external threads*

ISO 5855-2, *Aerospace — MJ threads — Part 2: Limit dimensions for bolts and nuts*

ISO 7913, *Aerospace — Bolts and screws, metric — Tolerances of form and position*

ISO 9152, *Aerospace — Bolts, with MJ threads, in titanium alloys, strength class 1 100 MPa — Procurement specification*

NAS 1800-90, *Recess, Six Lobe Drive — Internal — Dimensions for Recess and Gages⁵⁾*

1) Minimum tensile strength of the material at ambient temperature.

2) Maximum temperature that the screw can withstand without continuous change in its original characteristics, after return to ambient temperature. The maximum temperature is determined by the surface treatment.

3) Published as ASD-STAN Prestandard at the date of publication of this standard.

4) Published as ASD-STAN Technical Report at the date of publication of this standard.

5) Published by: Aerospace Industries Association of America, Inc., 1250 Eye street, NW Washington, DC 20005, United States.

3 Required characteristics

3.1 Configuration – Dimensions – Masses

See Figure 1 and Table 1.

Dimensions and tolerances are expressed in millimetres and apply after anodizing but before lubricating.

3.2 Tolerances of form and position

ISO 7913 and those specified in Figure 1 and Table 1.

3.3 Materials

TR 3775 (titanium alloy, classification 1 100 MPa).

3.4 Surface treatment

Lubrication:


- a) Lubricant: see Clause 4;
- b) Application: EN 2491, 5 µm to 10 µm.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 4178:2010](https://standards.iteh.ai/catalog/standards/sist/5eb68733-712f-4ab3-b6c6-fae6f94c0d2e/sist-en-4178-2010)

<https://standards.iteh.ai/catalog/standards/sist/5eb68733-712f-4ab3-b6c6-fae6f94c0d2e/sist-en-4178-2010>

Dimensions in millimetres

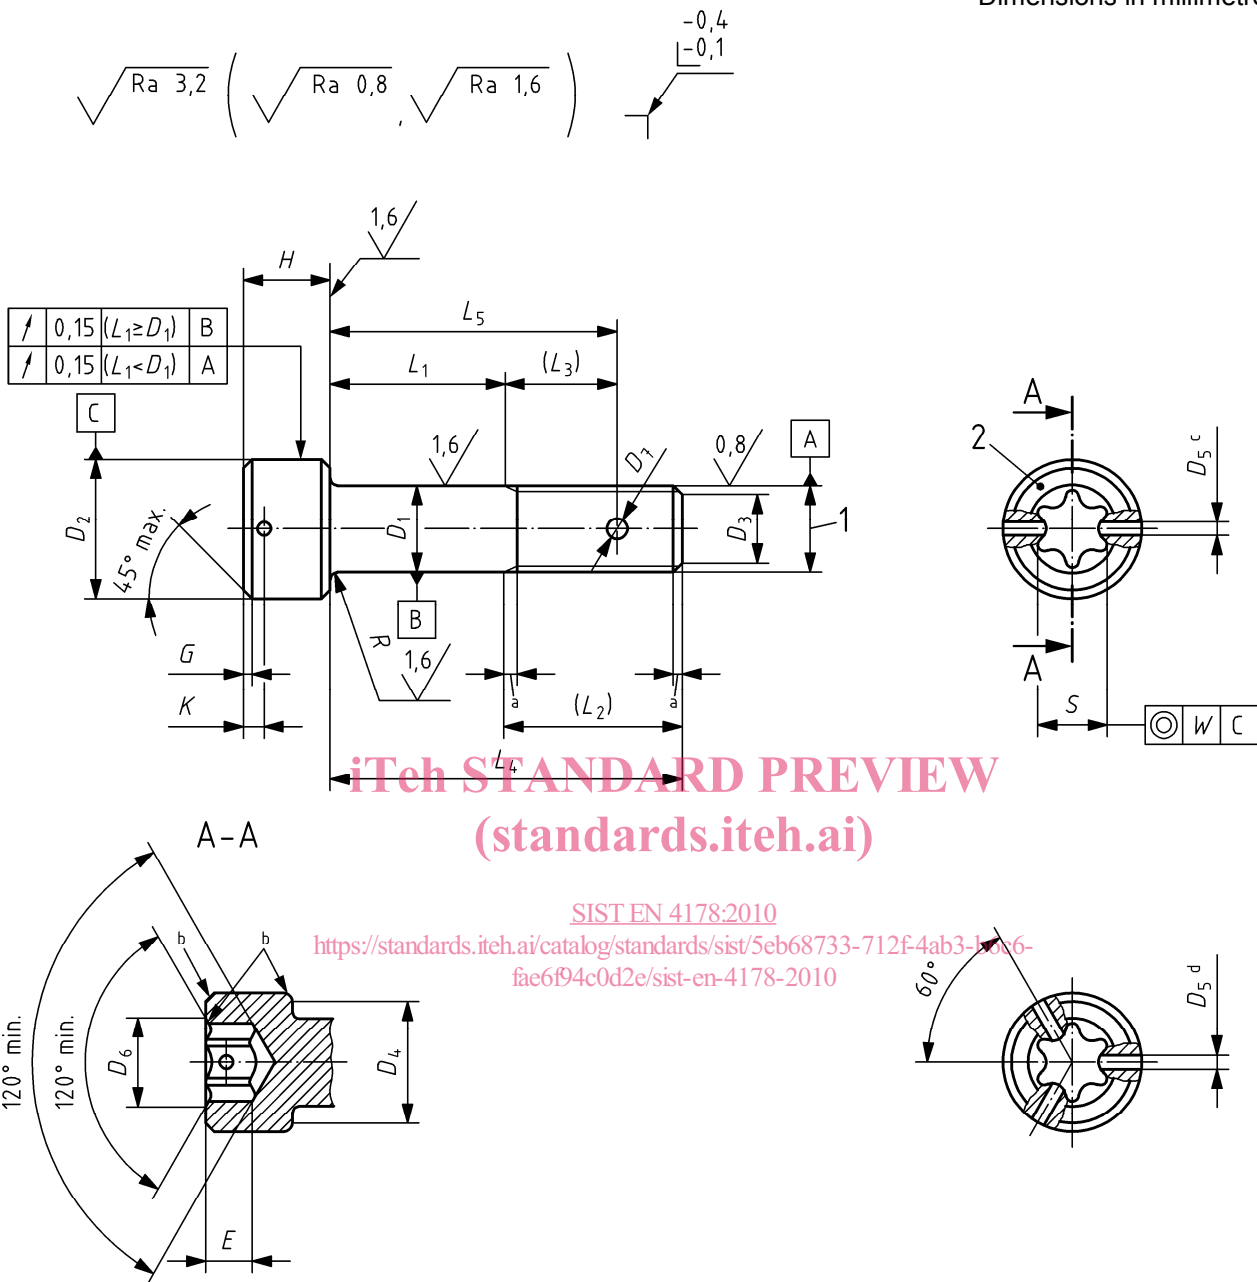

Key

- 1 Thread
- 2 Marking
- a Conforms to ISO 3353-1
- b Radius or chamfer
- c Two holes optional
- d Three holes optional

Figure 1

Table 1

Diameter code	Thread ^a	D_1	D_2	D_3		D_4	D_5	D_6	D_7	E		G	H	
		h12	h13	nom.	Tol.	min.	H13	max	H13	nom.	Tol.		nom	Tol.
030	MJ3x0,5 – 4h6h	3	5,5	2,3	0	5,07		3,4	-	1,5	0	0,3	3	
040	MJ4x0,7 – 4h6h	4	7	3	0,5	6,53	1	3,9	1,1	2	+	0,4	4	h13
050	MJ5x0,8 – 4h6h	5	8,5	3,4		8,03		5,1	1,5	2,5	0,2	0,5	5	
060	MJ6x1 – 4h6h	6	10	4,2		9,38		6,3		3	0	0,6	6	
080	MJ8x1 – 4h6h	8	13	6,2		12,33	1,4	7,5	1,9	4	+ 0,3	0,8	8	
100	MJ10x1,25 – 4h6h	10	16	7,9		15,33		10,2		5	0	1	10	h14
120	MJ12x1,25 – 4h6h	12	18	9,8		17,23	1,6	13,8	2,4	6	+ 0,5	1,2	12	

(concluded)

Diameter code	K $\pm 0,1$	$L_1 \pm 0,2^{b,c}$		L_2	L_3	R		W	Recess		Mass ^d	
		Length code	nom.			max	min.		EN 3911 code	NAS 1800 number	e	f
030	0,9	002 to 030	2 to 30	7,5	-	0,4	0,2			T10	1,04	0,055
040	1,4	002 to 040	2 to 40	10	6			0,22	25	-	2,26	0,1
050	1,6	003 to 050	3 to 50	12	7,5	0,5	0,3		27	-	4,55	0,153
060	2	003 to 060	3 to 60	14	8,5				-	T30	6,95	0,222
080	2,4	004 to 080	4 to 80	16,5	10,5	0,7	0,5		45	-	15,44	0,395
100		005 to 100	5 to 100	20,5	13	0,8		0,27	-	T50	29,3	0,616
120		006 to 120	6 to 120	22,5	14,5	0,9			-	T55	43,1	0,887

^a In accordance with ISO 5855-2.^b Increments:

- 1 for $L_1 \leq 30$;
- 2 for $30 < L_1 \leq 100$;
- 4 for $L_1 > 100$.

^c If greater lengths are required, they shall be chosen using the above increments. The length code corresponds to the length L_1 , completed by one or two zeros to the left, where necessary, to obtain a three digit code.^d Approximate values (kg/1 000 pieces), calculated on the basis of 4,45 kg/dm³, given for information purposes only. They apply to screws without holes.^e Value for head and first L_4 .^f Increase for each additional millimetre of L_4 .