

INTERNATIONAL STANDARD



**Metallic communication cable test methods –
Part 4-14: Electromagnetic compatibility (EMC) – Coupling attenuation of cable
assemblies (field conditions) absorbing clamp method**

IEC 62153-4-14:2012

<https://standards.iteh.ai/catalog/standards/sist/8c078fdb-6ca2-442b-9aa4-c6c215289b72/iec-62153-4-14-2012>



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2012 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.
If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...).

It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

<https://standards.iteh.ai/catalog/standards/sist/8c078fdb-6ca2-442b-9aa4-c6c215289b72/iec-62153-4-14-2012>

INTERNATIONAL STANDARD



**Metallic communication cable test methods –
Part 4-14: Electromagnetic compatibility (EMC) – Coupling attenuation of cable
assemblies (field conditions) absorbing clamp method**

[IEC 62153-4-14:2012](https://standards.iteh.ai/catalog/standards/sist/8c078fdb-6ca2-442b-9aa4-c6c215289b72/iec-62153-4-14-2012)

<https://standards.iteh.ai/catalog/standards/sist/8c078fdb-6ca2-442b-9aa4-c6c215289b72/iec-62153-4-14-2012>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE

P

ICS 33.040.20

ISBN 978-2-83220-086-5

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references	5
3 Terms and definitions	5
4 Test method	6
4.1 Equipment.....	6
4.1.1 General	6
4.1.2 Balun requirements	6
4.1.3 Extension cable requirements.....	7
4.2 Test sample	8
4.2.1 General	8
4.2.2 Tested length	8
4.2.3 Preparation of test sample.....	8
4.3 Calibration procedure	9
4.4 Test set-up.....	9
4.4.1 General	9
4.4.2 Test set-up verification	10
4.5 Measuring procedure.....	11
4.5.1 General	11
4.5.2 Example of link measurement.....	11
5 Expression of test results.....	12
6 Test report.....	12
6.1 General.....	12
6.2 Evaluation of test results	13
Bibliography.....	16
Figure 1 – Measurement of surface wave at one end of a link or channel.....	6
Figure 2 – Termination of link or channel or applied extension cable.....	9
Figure 3 – Example of a three-connector link configuration as defined in ISO/IEC 11801.....	11
Figure 4 – Wall outlet end measurement.....	12
Figure 5 – Typical measurement of an unscreened channel – Coupling attenuation, A is 43 dB.....	14
Figure 6 – Typical measurement of a screened balanced channel – Coupling attenuation, A is 57 dB.....	14
Figure 7 – Double wall outlet, right port (without connected screen) – Coupling attenuation, A is 44,8 dB.....	15
Figure 8 – Double wall outlet, left port (with connected screen) – Coupling attenuation, A is 61,5 dB.....	15
Table 1 – Balun performance characteristics.....	7

INTERNATIONAL ELECTROTECHNICAL COMMISSION

METALLIC COMMUNICATION CABLE TEST METHODS –**Part 4-14: Electromagnetic compatibility (EMC) –
Coupling attenuation of cable assemblies
(field conditions) absorbing clamp method**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62153-4-14 has been prepared by IEC technical committee 46: Cables, wires, waveguides, R.F. connectors, R.F. and microwave passive components and accessories.

The text of this standard is based on the following documents:

FDIS	Report on voting
46/400/FDIS	46/415/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all the parts in the IEC 62153 series, published under the general title: *Metallic communication cable test methods*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this standard may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

[IEC 62153-4-14:2012](https://standards.iteh.ai/catalog/standards/sist/8c078fdb-6ca2-442b-9aa4-c6c215289b72/iec-62153-4-14-2012)

<https://standards.iteh.ai/catalog/standards/sist/8c078fdb-6ca2-442b-9aa4-c6c215289b72/iec-62153-4-14-2012>

METALLIC COMMUNICATION CABLE TEST METHODS –

Part 4-14: Electromagnetic compatibility (EMC) – Coupling attenuation of cable assemblies (field conditions) absorbing clamp method

1 Scope

This part of IEC 62153 gives the in-field test method that is used to determine the coupling attenuation for installed links and channels used in analogue and digital communication systems.

This method is used to determine the attenuation of disturbing power to signal power in a cabling system, and vice versa. This determines the influence from cabling on the EMC performance of a system.

NOTE 1 The coupling attenuation of installed links and channels is dependent upon the performance of the cabling components (balance and screening if applicable), workmanship (especially termination of screens) and earthing and grounding. This procedure determines the overall effect of these parameters.

NOTE 2 This method cannot be used for verification of compliance with emission and immunity EMC standards for the complete system, including active components.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050 (all parts), *International Electrotechnical Vocabulary* (available at <http://www.electropedia.org/>)

IEC 61196-1, *Coaxial communication cables – Part 1: Generic specification – General, definitions and requirements*

IEC 62153-4-5:2006, *Metallic communication cable test methods – Part 4-5: Electromagnetic Compatibility (EMC) – Coupling or screening attenuation – Absorbing clamp method*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-726 and IEC 61196-1 apply.


The theoretical background is given in IEC/TR 62153-4-0 and IEC/TR 62153-4-1.

4 Test method

4.1 Equipment

4.1.1 General

The field test equipment ¹ shall be able to measure the coupling attenuation according to the principle defined in 5.1.1 of IEC 62153-4-5:2006 and Figure 1 below.

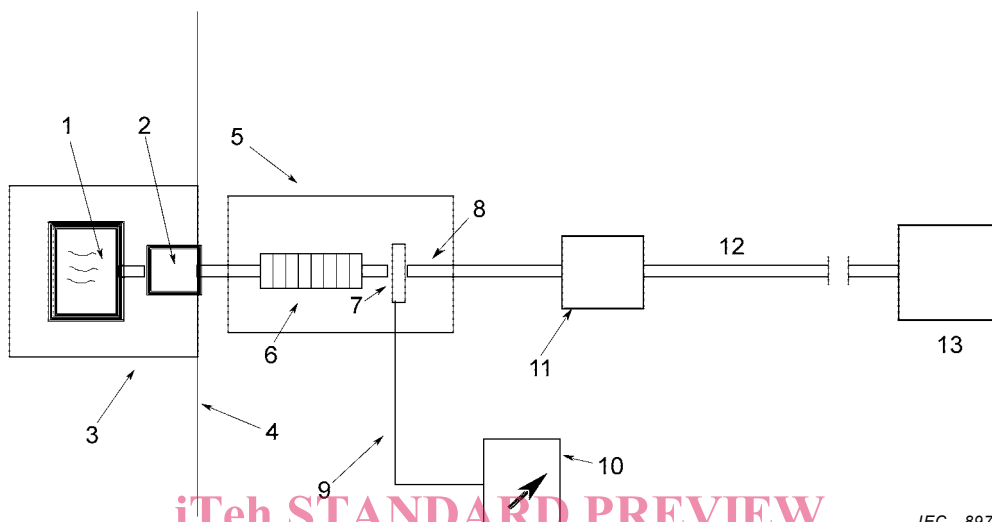

Key

- 1 Signal generator, output impedance Z_0
- 2 Balun (if applicable)
- 3 Screen of signal generator and balun if needed for high dynamic range
- 4 Reflector plate, minimum size 0,2 m × 0,2 m
- 5 Absorbing clamp
- 6 Absorber (ferrite tube) of the clamp, insertion loss > 10 dB ²
- 7 Current transformer of the clamp
- 8 Extension cable for connection to link under test. length 2 m
- 9 Measuring receiver cable (use the same in measurement and calibration)
- 10 Measuring receiver
- 11 Connecting hardware in measured end of link or channel
- 12 Link or channel under test
- 13 Load termination of far end of link or channel under test

Figure 1 – Measurement of surface wave at one end of a link or channel

4.1.2 Balun requirements

For the measurement of symmetrical links or channels, a means for generating symmetrical signals shall be provided. If the generator is unbalanced, this may be performed by the use of a balun or 180° power splitter.

The minimum requirements for this device are specified in Table 1.

¹ Instead of a signal generator and measuring receiver or network analyser, a spectrum analyser with tracking generator can be used, which is available as a field test equipment.

² There is no requirement for an absorber in the far end.

The attenuation of the balun shall be kept as low as possible because it will limit the dynamic range of the coupling attenuation or screening attenuation measurements.

Table 1 – Balun performance characteristics

Parameter	Value
Impedance, primary ^a	50 Ω (unbalanced)
Impedance, secondary ^b	100 Ω or 150 Ω (balanced)
Operational attenuation ^d (including matching pads if used)	≤ 10 dB
Return loss, bi-directional	≥ 6 dB
Power rating	To accommodate the power of the generator and amplifier (if applicable)
Output signal balance ^c	≥ 50 dB from 30 MHz to 100 MHz ≥ 30 dB from 100 MHz to the highest measured frequency
^a Primary impedance may differ if necessary to accommodate analyser outputs other than 50 Ω. ^b Balanced outputs of the test baluns shall be matched to the nominal impedance of the symmetrical patch cord / cable pair. 100 Ω shall be used for termination of 120 Ω cabling. ^c Measured per ITU-T Recommendations G.117 and O.9. ^d The operational attenuation of a balun shall be mathematically deduced from 3 operational attenuation measurements with 3 baluns back-to-back.	

(standards.iteh.ai)

4.1.3 Extension cable requirements

IEC 62153-4-14:2012

An extension cable is only required if the channel or link under test does not include a cable, which can be connected to the test set-up.

The length of the extension cable shall be 2 m ± 0,1 m.

Unscreened extension cables shall be used for testing unscreened, balanced links or channels. Screened, balanced extension cables shall be used for testing screened, balanced links or channels. Coaxial extension cables shall be used for testing coaxial links or channels.

The electrical transmission performance, including electromagnetic screening and unbalance attenuation of the extension cables, shall be better or equal to the performance of the link or channel under test. The choice of the extension cable should assure the minimum possible insertion loss and reflection loss of the set-up.

The extension cables shall have the same nominal characteristic impedance as the link or channel under test. Likewise, the same type of insulation (i.e. foamed or solid) shall be used. The insertion loss of an extension cable including mating connector, if applicable, shall be less than 2,0 dB up to the highest measurement frequency.

The extension cables, any mating connectors and the connection between extension cables and the mating connectors, if applicable, should have a balance or screening or balance and screening as good as possible, because its quality may have an impact on the test results. To further enhance the measurement sensitivity, the connection between the mating connector and the extension cable may be improved since it does not form part of the device under test. It is not allowed to improve any contact between the connecting hardware of the link or channel under test and the mating connector of the extension cable, if applicable. The measurement sensitivity shall be 6 dB better than the specified requirement limit for the link or channel under test. See 4.4.2.1 for determination of the measurement sensitivity.

In case of doubt regarding the interoperability between any mating connector and the connecting hardware of the link or channel under test, it is recommended to use the mating connector specified or advised by the supplier of the connecting hardware of the link or channel under test.

4.2 Test sample

4.2.1 General

The test sample consists of the link or channel under test, an extension cable (if applicable), and a far end termination. In the near end, an extension cable is used to connect the link or channel with the balun (if applicable), network analyser or signal generator. In the far end, a suitable connecting hardware with build in resistor terminations is used for termination of the link or channel under test.

The sample therefore consists of

- one extension cable with mating connector in the near end of the link or channel under test, if applicable;
- one connecting hardware with build in resistor terminations. If the link or channel under test is unshielded, the connecting hardware shall be unshielded. The termination resistors shall be mounted as close to the connecting hardware as possible and mounted in order to maintain good balance properties. If the link or channel under test is shielded, the connecting hardware shall be shielded. The resistor terminations shall be mounted in a shield, which is integrated with the connector shield;
- an installed link or channel under test.

4.2.2 Tested length

The effective test length of each measurement is determined by the length of the link or channel under test.

4.2.3 Preparation of test sample

4.2.3.1 General


The diameter of any extension cables shall be selected to allow insertion in the bore of the absorbing clamp.

When a special type of socket interface is specified for termination of the link or channel, such interface shall be used in the mating connector in question.

The bore of the absorbing clamp shall be larger than the diameter of the cables of the measured parts of the link or channel under test.

4.2.3.2 Balanced links or channels

Differential and common mode terminations are required for each unmeasured pair at the near end of the link or channel or any applied extension cable, see Figure 2. Differential and common mode terminations are required for each pair at the far end of the link or channel, see Figure 2.

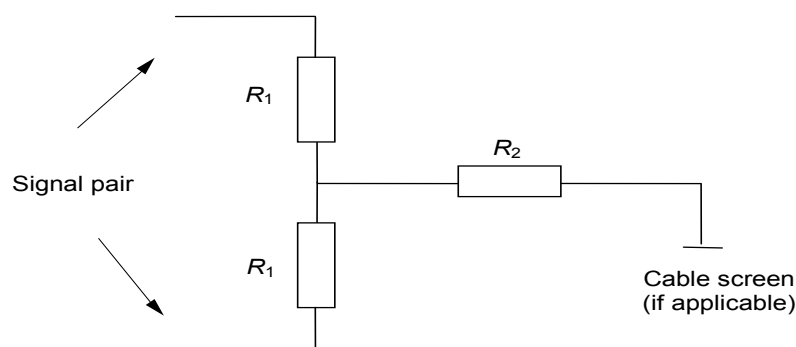

IEC 898/12

Figure 2 – Termination of link or channel or applied extension cable

The value of the R_1 resistors shall be one-half the nominal characteristic impedance of the cable(s) of the link or channel.

In case of screened cables, the terminating resistors shall be screened and R_2 shall be equal to 0Ω ³.

In case of unshielded cables, the terminating resistor R_2 shall be equal to 25Ω .

The centre taps of the terminations shall be connected together. In the case of screened cables, the centre taps shall be connected to the screens.

4.2.3.3 Multi-conductor links or channels

Under consideration.

[IEC 62153-4-14:2012](https://standards.iteh.ai/catalog/standards/sist/8c078fdb-6ca2-442b-9aa4-c6c215289b72/iec-62153-4-14-2012)

[https://standards.iteh.ai/catalog/standards/sist/8c078fdb-6ca2-442b-9aa4-](https://standards.iteh.ai/catalog/standards/sist/8c078fdb-6ca2-442b-9aa4-c6c215289b72/iec-62153-4-14-2012)

[c6c215289b72/iec-62153-4-14-2012](https://standards.iteh.ai/catalog/standards/sist/8c078fdb-6ca2-442b-9aa4-c6c215289b72/iec-62153-4-14-2012)

4.2.3.4 Combined balanced and coaxial links or channels

The balanced link or channel end shall be connected to balanced test equipment or terminations. The coaxial link or channel end shall be connected to unbalanced test equipment or terminations.

4.2.3.5 Coaxial links and channels

The far end shall be terminated with its nominal characteristic impedance.

4.3 Calibration procedure

Calibration shall be performed according to 5.3 of IEC 62153-4-5:2006. If a scalar instrument is used for field tests, calibration coefficients for balun and clamp, determined by laboratory characterization, shall be used when calculating the result. (The calibration coefficients may be included in the software of the instrument.)

4.4 Test set-up

4.4.1 General

See 5.4 of IEC 62153-4-5:2006.

³ For 100Ω balanced cabling, the common mode impedance will be equal to 25Ω when R_2 is short-circuited, 50Ω when R_2 is 25Ω .