

TECHNICAL REPORT

**Optical amplifiers –
Part 6: Distributed Raman amplification**

iTeh Standards
(<https://standards.itih.ai>)
Document Preview

IEC TR 61292-6:2010

<https://standards.itih.ai/standards/iec/c/35105b-0046-435a-8546-aab4c452d920/iec-tr-61292-6-2010>

Withhold





THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2010 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.


- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch
Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00

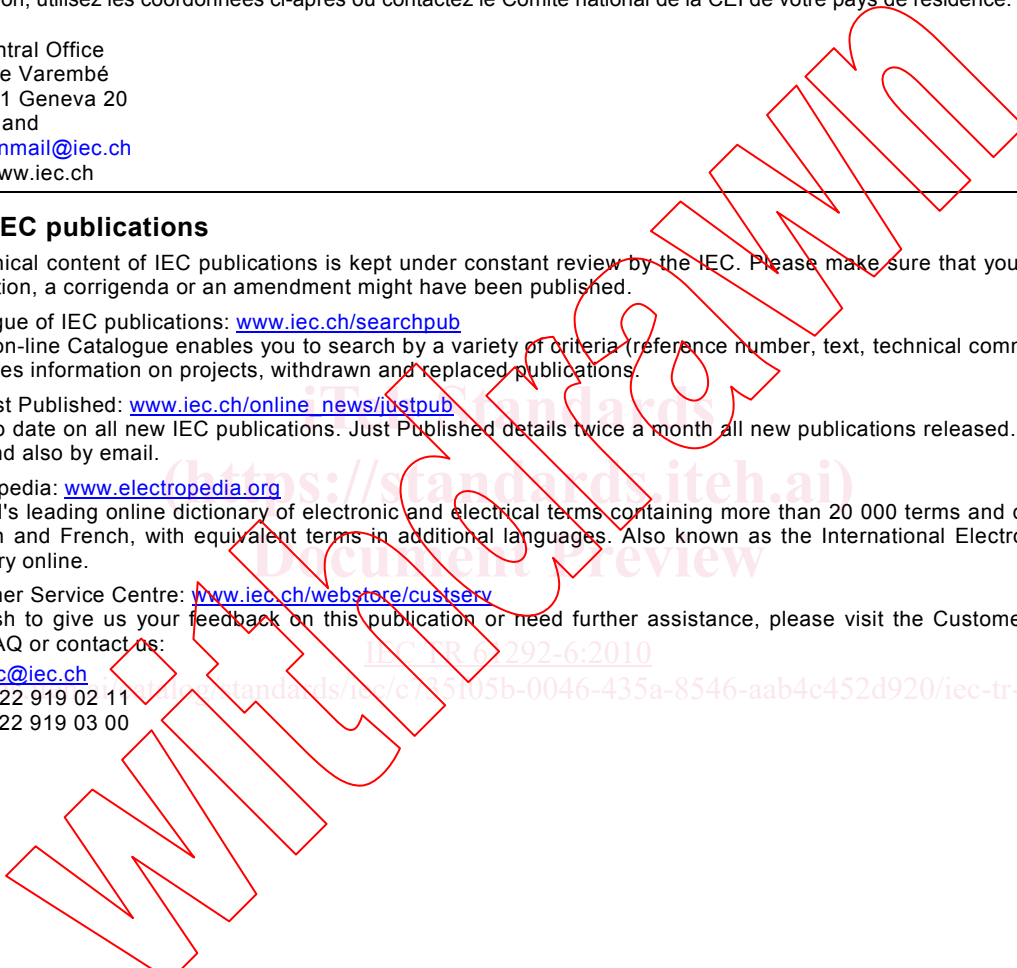

<https://standards.iteh.ai/> IEC TR 61292-6:2010
<https://standards.iec.ch/standards/iec/c/25105b-0046-435a-8546-aab4c452d920/iec-tr-61292-6-2010>

TECHNICAL REPORT

**Optical amplifiers –
Part 6: Distributed Raman amplification**

iTech Standards
(<https://standards.itih.ai>)
Document Preview

<https://standards.itih.ai/Catalogue/standards/iec/c/35105b-0046-435a-8546-aab4c452d920/iec-tr-61292-6-2010>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE

T

ICS 33.160.10; 33.180.30

ISBN 978-2-88910-482-6

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	6
1 Scope.....	7
2 Normative references.....	7
3 Abbreviated terms.....	8
4 Background.....	8
4.1 General.....	8
4.2 Raman amplification process.....	8
4.3 Distributed vs. lumped amplification.....	10
4.4 Tailoring the Raman gain spectrum.....	10
4.5 Forward and backward pumping configuration.....	11
4.6 Typical performance of DRA.....	12
5 Applications of distributed Raman amplification.....	13
5.1 General.....	13
5.2 All-Raman systems.....	13
5.3 Hybrid EDFA Raman systems.....	14
5.3.1 Long repeaterless links.....	14
5.3.2 Long span masking in multi-span links.....	15
5.3.3 High capacity long haul and ultra-long haul systems.....	15
6 Performance characteristics and test methods.....	15
6.1 General.....	15
6.2 Performance of the Raman pump module.....	16
6.2.1 Pump wavelengths.....	16
6.2.2 Pump output power.....	16
6.2.3 Pump degree-of-polarization (DOP).....	17
6.2.4 Pump relative intensity noise (RIN).....	17
6.2.5 Insertion loss.....	17
6.2.6 Other passive characteristics.....	18
6.3 System level performance.....	18
6.3.1 On-off signal gain.....	18
6.3.2 Gain flatness.....	19
6.3.3 Polarization dependant gain (PDG).....	20
6.3.4 Equivalent noise figure.....	20
6.3.5 Multi-path interference (MPI).....	20
7 Operational issues.....	21
7.1 General.....	21
7.2 Dependence of Raman gain on transmission fibre.....	21
7.3 Fibre line quality.....	22
7.4 High pump power issues.....	22
7.4.1 Laser safety.....	23
7.4.2 Damage to the fibre line.....	23
8 Conclusions.....	24
Bibliography.....	25

Figure 1 – Stimulated Raman scattering process (left) and Raman gain spectrum for silica fibres (right)	9
Figure 2 – Distributed vs. lumped amplification	10
Figure 3 – The use of multiple pump wavelengths to achieve flat broadband gain.....	11
Figure 4 – Simulation results showing pump and signal propagation along an SMF span in forward (right plot) and backward (left plot) pumping configurations	11
Figure 5 – On-off gain and equivalent NF for SMF using a dual pump backward DRA with pumps at 1 424 nm and 1 452 nm	13
Figure 6 – Typical configuration of an amplification site in an all-Raman system	14
Figure 7 – Typical configuration of a Raman pump module used for counter-propagating DRA.....	16
Figure 8 – Model for signal insertion loss (IL) of a Raman pump module used for counter-propagating DRA.....	18
Figure 9 – Typical configuration used to measure on of gain (a) for co-propagating DRA and (b) for counter-propagating DRA.....	19
Figure 10 – Variations of Raman on-off gain for different transmission fibres	22

iTech Standards
 (https://standards.iteh.ai)
 Document Preview

IEC TR 61292-6:2010

<https://standards.iteh.ai/Catalogue/standards/iec/c/35105b-0046-435a-8546-aab4c452d920/iec-tr-61292-6-2010>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

OPTICAL AMPLIFIERS –

Part 6: Distributed Raman amplification

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a technical report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

IEC 61292-6, which is a technical report, has been prepared by subcommittee 86C: Fibre optic systems and active devices, of IEC technical committee 86: Fibre optics.

The text of this technical report is based on the following documents:

Enquiry draft	Report on voting
86C/910/DTR	86C/936/RVC

Full information on the voting for the approval of this technical report can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61292 series, published under the general title *Optical amplifiers*, can be found on the IEC website.

The committee has decided that the contents of this amendment and the base publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

iTech Standards
(<https://standards.itih.ai>)
Document Preview

IEC TR 61292-6:2010

<https://standards.itih.ai/Catalogue/standards/iec/c/35105b-0046-435a-8546-aab4c452d920/iec-tr-61292-6-2010>

INTRODUCTION

Distributed Raman amplification (DRA) describes the process whereby Raman pump power is introduced into the transmission fibre, leading to signal amplification within the transmission fibre through stimulated Raman scattering. This technology has become increasingly widespread in recent years due to the many advantages that it offers optical system designers, including improved system optical signal-to-noise ratio (OSNR), and the ability to tailor the gain spectrum to cover any or several transmission bands.

A fundamental difference between distributed Raman amplification and amplification using discrete amplifiers, such as erbium-doped fibre amplifiers (EDFAs), is that the latter can be described using a black box approach, while the former is an inherent part of the system in which it is deployed. Thus, a discrete amplifier is a unique and separate element with a well defined input and output ports, allowing rigorous specifications of the amplifier's performance characteristics and the methods used to test these characteristics. On the other hand, a distributed Raman amplifier is basically a pump module, with the actual amplification process taking place along the transmission fibre. This means that many of the performance characteristics of distributed Raman amplification are inherently coupled to the system in which it is deployed.

This technical report provides an overview of DRA and its applications. It also provides a detailed discussion of the various performance characteristics related to DRA, some of the methods that can be used to test these characteristics, and some of the operational issues related to the distributed nature of the amplification process, such as the sensitivity to transmission line quality and eye-safety.

The material provided is intended to provide a basis for future development of specifications and test method standards related to DRA.

OPTICAL AMPLIFIERS –

Part 6: Distributed Raman amplification

1 Scope

This part of IEC 61292, which is a technical report, deals with distributed Raman amplification (DRA). The main purpose of the report is to provide background material for future standards (specifications, test methods and operating procedures) relating to DRA. The report covers the following aspects:

- general overview of Raman amplification;
- applications of DRA;
- performance characteristics and test methods related to DRA;
- operational issues relating to the deployment of DRA.

As DRA is a relatively young technology, and still rapidly evolving, some of the material in this report may become obsolete or irrelevant in a relatively short period. This technical report will be frequently updated in order to minimize this possibility.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60825-2, *Safety of laser products – Part 2: Safety of optical fibre communication systems (OFCS)*

IEC 61290-3, *Optical amplifiers – Test methods – Part 3: Noise figure parameters*

IEC 61290-3-1, *Optical amplifiers – Test methods – Part 3-1: Noise figure parameters – Optical spectrum analyzer method*

IEC 61290-3-2, *Optical amplifiers – Test methods – Part 3-2: Noise figure parameters – Electrical spectrum analyzer method*

IEC 61290-7-1, *Optical amplifiers – Test methods – Part 7-1: Out-of-band insertion losses – Filtered optical power meter method*

IEC 61291-1, *Optical amplifiers – Part 1: Generic specification*

IEC/TR 61292-3, *Optical amplifiers – Part 3: Classification, characteristics and applications*

IEC/TR 61292-4, *Optical amplifiers – Part 4: Maximum permissible optical power for the damage-free and safe use of optical amplifiers, including Raman amplifiers*

ITU-T G.664, *Optical safety procedures and requirements for optical transport systems*

ITU-T G.665, *Generic characteristics of Raman amplifiers and Raman amplified subsystems*

NOTE A list of informative references is given in the Bibliography.

3 Abbreviated terms

For the purposes of this document, the following abbreviated terms apply.

APR	automatic power reduction
DCF	dispersion compensating fibre
DOP	degree of polarization
DRA	distributed Raman amplification
DRB	double Rayleigh backscattering
DWDM	dense wavelength division multiplexing
EDFA	erbium-doped fibre amplifier
ESA	electrical spectrum analyzer
FBG	fibre Bragg grating
FWHM	full width half maximum
GFF	gain flattening filter
LRFA	lumped Raman fibre amplifier
MPI	multi-path interference
NZDSF	non-zero dispersion shifted fibre
OA	optical amplifier
OFA	optical fibre amplifier
OSA	optical spectrum analyzer
OSC	optical supervisory channel
OSNR	optical signal-to-noise ratio
PDG	polarization dependent gain
PMD	polarization mode dispersion
RIN	relative intensity noise
ROADM	reconfigurable optical add drop multiplexer
SMF	single mode fibre

4 Background

4.1 General

This clause provides a brief introduction to the main concepts of Raman amplification. Further information can be found IEC/TR 61292-3, ITU-T G.665, as well as in the bibliography.

4.2 Raman amplification process

Raman scattering, first discovered by Sir Chandrasekhara Raman in 1928, describes an inelastic scattering process whereby light is scattered from matter molecules to a higher wavelength (lower energy). In this interaction between light and matter, a light photon excites the matter molecules to a high (virtual) energy state, which then relaxes back to the ground state by emitting another photon as well as vibration (i.e. acoustic) energy. Due to the vibration energy, the emitted photon has less energy than the incident photon, and therefore a higher wavelength.

Stimulated Raman scattering describes a similar process whereby the presence of a higher wavelength photon stimulates the scattering process, i.e. the absorption of the initial lower

wavelength photon, resulting in the emission of a second higher wavelength photon, thus providing amplification. This process is shown in Figure 1 for silica fibres, where a ~1 550 nm signal is amplified through absorption of pump energy at ~1 450 nm. Unlike doped OFAs, such as EDFAs, where the gain spectrum is constant and determined by the dopants, with Raman amplification the gain spectrum depends on the pump wavelength, with maximum gain occurring at a frequency of about 13 THz (for Silica fibres) below that of the pump. This is shown on the right side of Figure 1.

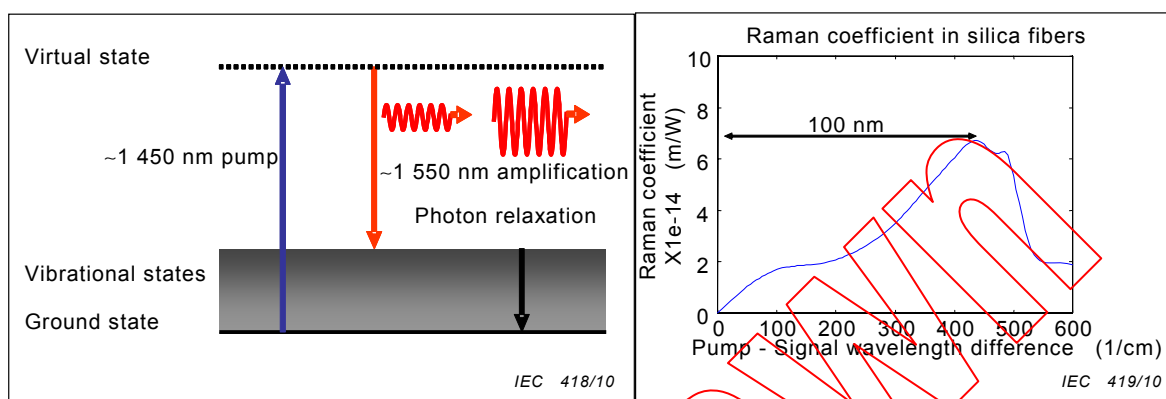


Figure 1 – Stimulated Raman scattering process (left) and Raman gain spectrum for silica fibres (right)

In its most basic form, a Raman amplifier consists of a Raman pump laser, a fibre amplification medium, and a means of coupling the Raman pump and input signal into the fibre. The main performance parameter characterizing the Raman amplifier is the on-off gain, which is defined as the ratio of the output signal (i.e. the signal at the fibre output) when the Raman pumps are on to the output signal when the Raman pumps are off (the on-off gain will be further discussed in 6.2.1). Neglecting pump power depletion (i.e. small input signal regime), the on-off gain of a Raman amplifier can be approximated by

$$G = 4,34C_R PL_{eff}$$

where G is the on-off gain (in dB), C_R the Raman efficiency between pump and signal, P the coupled pump power, and L_{eff} the effective length of the fibre with respect to the Raman process, defined as

$$L_{eff} \equiv \frac{1 - e^{-\alpha_p L}}{\alpha_p}$$

where α_p is the fibre attenuation coefficient at the pump WL.

The Raman efficiency C_R depends on the separation between the pump and signal wavelengths, as well as their relative polarization. If the pump and signal polarizations are orthogonal, then $C_R = 0$, whereas if they have the same polarization, C_R is maximum. In many cases, the pump is depolarized, and then C_R is approximately half the maximum value. In other cases, the pump and signal relative polarization changes continuously as they propagate along the fibre amplification medium, so that C_R has the same average value as for the depolarized pump case. However, in this case, C_R may have some residual dependence on signal polarization, resulting in PDG.