



SLOVENSKI STANDARD
SIST EN 303 035-2 V1.2.2:2004

01-februar-2004

Df]nYa b]`gbcj b]`fUX]c`fH9HF5Ł!`<Ufa cb]n]fUb]`Yj fcdg_]`gHUbXUX`fØBŁnU
cdfYa c`H9HF5ž_]`nUYa UV]ghj YbY`nU hYj Y` `YbU' "&X]fY`hj Y`c`fUX]`g_]`b
hY`Y`ca i b]`UW]`g_]`hYfa]bUg_]`cdfYa]`fF/`HH9Ł!`&`"XY.`BYdcgfYXbc`cVfUrcj Ub`Y
fBACL

Terrestrial Trunked Radio (TETRA); Harmonized EN for TETRA equipment covering essential requirements under article 3.2 of the R&TTE Directive, Part 2: Direct Mode Operation (DMO)

(standards.iteh.ai)

[SIST EN 303 035-2 V1.2.2:2004](https://standards.iteh.ai/catalog/standards/sist/5baa0210-07b6-4ae6-80f0-cc81a4badcbd/sist-en-303-035-2-v1-2-2-2004)

<https://standards.iteh.ai/catalog/standards/sist/5baa0210-07b6-4ae6-80f0-cc81a4badcbd/sist-en-303-035-2-v1-2-2-2004>

Ta slovenski standard je istoveten z: EN 303 035-2 Version 1.2.2

ICS:

33.070.10	Prizemni snopovni radio (TETRA)	Terrestrial Trunked Radio (TETRA)
-----------	---------------------------------	-----------------------------------

SIST EN 303 035-2 V1.2.2:2004 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 303 035-2 V1.2.2:2004

<https://standards.iteh.ai/catalog/standards/sist/5baa0210-07b6-4ae6-80f0-cc81a4badcbd/sist-en-303-035-2-v1-2-2-2004>

ETSI EN 303 035-2 V1.2.2 (2003-01)

Candidate Harmonized European Standard (Telecommunications series)

**Terrestrial Trunked Radio (TETRA);
Harmonized EN for TETRA equipment covering essential
requirements under article 3.2 of the R&TTE Directive;
Part 2: Direct Mode Operation (DMO)**

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

[SIST EN 303 035-2 V1.2.2:2004](https://standards.iteh.ai/catalog/standards/sist/5baa0210-07b6-4ae6-80f0-cc81a4badcbd/sist-en-303-035-2-v1-2-2-2004)

<https://standards.iteh.ai/catalog/standards/sist/5baa0210-07b6-4ae6-80f0-cc81a4badcbd/sist-en-303-035-2-v1-2-2-2004>



Reference

REN/TETRA-00084

Keywords

DMO, radio, regulation, TETRA**ETSI**

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 303 035-2 V1.2.2:2004<https://standards.iteh.ai/catalog/standards/sist/5baa0210-07b6-4ae6-80f0-cc81a4badc01/sist-en-303-035-2-v1-2-2-2004>**Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

editor@etsi.org

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2003.
All rights reserved.

DECT™, **PLUGTESTS™** and **UMTS™** are Trade Marks of ETSI registered for the benefit of its Members.
TIPHON™ and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Intellectual Property Rights	6
Foreword.....	6
Introduction	7
1 Scope	9
2 References	10
3 Definitions and abbreviations.....	12
3.1 Definitions	12
3.2 Abbreviations	13
4 Technical requirements specifications	15
4.1 Environmental profile.....	15
4.2 Conformance requirements	15
4.2.1 Requirements associated with frequency and channel allocation	16
4.2.2 Requirements associated with transmitting functions.....	19
4.2.3 Requirements associated with receiving functions	23
4.2.4 Requirements associated with control and monitoring functions	24
4.2.4.1 Requirements for the radio layer.....	24
4.2.4.2 Requirements for the lower MAC layer	26
4.2.4.3 Managed DMO requirements.....	27
4.2.4.4 Requirements for the upper MAC layer.....	28
4.2.4.5 Requirements for the DMMM layer.....	32
4.2.4.6 Requirements for the DMCC layer.....	33
5 Testing for compliance with technical requirements.....	36
5.1 Environmental conditions for testing.....	36
5.2 Interpretation of the measurement results.....	36
5.3 Essential radio test suites.....	38
5.3.1 Reference test specifications.....	38
5.3.2 Test configuration.....	39
5.3.3 Test specification for DM-MS	39
5.3.3.1 Radio layer test specification for DM-MS	39
5.3.3.1.1 Test case index for radio layer for DM-MS.....	39
5.3.3.1.2 Test case selection expression definitions for radio layer for DM-MS	40
5.3.3.1.3 Test suite parameter definitions for radio layer for DM-MS	41
5.3.3.2 Managed DMO test specification for DM-MS.....	41
5.3.3.2.1 Test suite structure Managed DMO.....	41
5.3.3.2.2 Test case index for Managed DMO.....	41
5.3.3.2.3 Test case selection expression definitions for Managed DMO.....	41
5.3.3.2.4 Test suite parameter definitions for Managed DMO	42
5.3.3.3 Upper MAC layer test specification for DM-MS.....	42
5.3.3.3.1 Upper MAC layer test specification for DM-MS for operation MS to MS	42
5.3.3.3.2 Upper MAC layer test specification for DM-MS for operation with DMO Repeater type 1	44
5.3.3.3.3 Upper MAC layer test specification for DM-MS for operation with DMO Repeater type 2	47
5.3.3.3.4 Upper MAC layer test specification for DM-MS for operation with DMO Gateway	48
5.3.3.4 Direct Mode Mobility Management (DMMM) test specification for DM-MS for operation with DMO Gateway	50
5.3.3.4.1 Test suite structure for DMMM for MS-GW	50
5.3.3.4.2 Test case index for DMMM for DM-MS	50
5.3.3.4.3 Test case selection expression definitions DMMM for DM-MS.....	50
5.3.3.4.4 Test suite parameter definitions for DMMM for DM-MS.....	51
5.3.3.5 Direct Mode Call Control (DMCC) test specification for DM-MS	51
5.3.3.5.1 DMCC test specification for DM-MS for operation MS to MS	51
5.3.3.5.2 DMCC test specification for DM-MS for operation with DMO Repeater type 1.....	55
5.3.3.5.3 DMCC test specification for DM-MS for operation with DMO Repeater type 2.....	56
5.3.3.5.4 DMCC test specification for DM-MS for operation with DMO Gateway	58

5.3.4	Test specification for DM-REP1	61
5.3.4.1	Radio layer test specification for DM-REP1	61
5.3.4.1.1	Test case index for radio layer for DM-REP1	61
5.3.4.1.2	Test case selection expression definitions for radio layer for DM-REP1	62
5.3.4.1.3	Test suite parameter definitions for radio layer for DM-REP1	63
5.3.4.2	Upper MAC layer test specification for DM-REP1	63
5.3.4.2.1	Test suite structure for Upper MAC layer for DM-REP1	63
5.3.4.2.2	Test case index for Upper MAC layer for DM-REP1	63
5.3.4.2.3	Test case selection expression definitions for Upper MAC layer for DM-REP1	64
5.3.4.2.4	Test suite parameter definitions for Upper MAC layer for DM-REP1	64
5.3.5	Test specification for DM-REP2	65
5.3.5.1	Radio layer test specification for DM-REP2	65
5.3.5.1.1	Test case index for radio layer for DM-REP2	65
5.3.5.1.2	Test case selection expression definitions for radio layer for DM-REP2	66
5.3.5.1.3	Test suite parameter definitions for radio layer for DM-REP2	67
5.3.5.2	Upper MAC layer test specification for DM-REP2	67
5.3.5.2.1	Test suite structure for Upper MAC layer for DM-REP2	67
5.3.5.2.2	Test case index for Upper MAC layer for DM-REP2	67
5.3.5.2.3	Test case selection expression definitions for Upper MAC layer for DM-REP2	68
5.3.5.2.4	Test suite parameter definitions for Upper MAC layer for DM-REP2	68
5.3.6	Test specification for DM-GATE	69
5.3.6.1	Radio layer test specification for DM-GATE	69
5.3.6.1.1	Test case index for radio layer for DM-GATE	69
5.3.6.1.2	Test case selection expression definitions for radio layer for DM-GATE	69
5.3.6.1.3	Test suite parameter definitions for radio layer for DM-GATE	69

Annex A (normative): The EN Requirements Table (EN-RT).....70

A.1	General capabilities of equipment	71
A.1.1	Type of equipment	71
A.1.2	Modes of operation for DM-MS	71
A.1.3	Protocol layers	71
A.1.4	Services and capabilities	73
A.1.4.1	Services and capabilities for DM-MS	73
A.1.4.2	Services and capabilities for DM-REP1	75
A.1.4.3	Services and capabilities for DM-REP2	75
A.1.4.4	Services and capabilities for DM-GATE	75
A.1.5	Environmental profile	76
A.2	Radio layer requirements	76
A.2.1	Radio layer requirements associated with frequency and channel allocation	76
A.2.2	Radio layer requirements associated with transmitting functions	79
A.2.3	Radio layer requirements associated with receiving functions	81
A.2.4	Radio layer requirements associated with control and monitoring functions	82
A.3	Medium Access Control (MAC) layer requirements	83
A.3.1	Lower MAC	83
A.3.2	Managed DMO	84
A.3.3	Upper MAC	84
A.3.3.1	Upper MAC for DM-MS	84
A.3.3.2	Upper MAC for DM-REP1	87
A.3.3.3	Upper MAC for DM-REP2	89
A.3.3.4	Upper MAC for DM-GATE	90
A.4	Direct Mode Mobility Management (DMMM) requirements	91
A.5	Direct Mode Call Control (DMCC) requirements	92
A.5.1	DMCC for DM-MS	92
A.5.2	DMCC for DM-GATE	95

Annex B (normative): Declarations on capabilities and parameters supported.....98

B.1	Radio layer	98
B.2	Managed Direct Mode Operation (M-DMO)	99

B.3	Medium Access Control (MAC)	99
B.3.1	Upper MAC for DM-MS	99
B.3.1.1	Upper MAC for DM-MS for operation MS to MS	99
B.3.1.2	Upper MAC for DM-MS for operation with DMO Repeater type 1	100
B.3.1.3	Upper MAC for DM-MS for operation with DMO Repeater type 2	100
B.3.1.4	Upper MAC for DM-MS for operation with DMO Gateway	101
B.3.2	Upper MAC for DMO Repeater type 1	102
B.3.3	Upper MAC for DMO Repeater type 2	102
B.4	Direct Mode Mobility Management (DMMM)	102
B.5	Direct Mode Call Control (DMCC)	103
B.5.1	DMCC for DM-MS for operation MS to MS	103
B.5.2	DMCC for DM-MS for operation with DMO Repeater type 1	103
B.5.3	DMCC for DM-MS for operation with DMO Repeater type 2	104
B.5.4	DMCC for DM-MS for operation with DMO Gateway	104
Annex C (normative): Test Specification for Managed DMO		106
C.1	Introduction	106
C.2	Test Suite Structure and Test Purposes (TSS&TP)	106
C.2.1	Test Suite Structure (TSS)	106
C.2.2	Test purposes	106
C.2.2.1	M-DMO-MS MAC (M_DMO_MSMS_MAC) tests	106
C.2.2.1.1	M-DMO-MS MAC capability tests	106
C.3	Abstract Test Specification for Managed DMO	107
C.3.1	Abstract Test Method (ATM) for Managed DMO	107
C.3.2	Abstract Test Suite (ATS) for Managed DMO	107
C.3.2.1	The TTCN Graphical form (TTCN.GR)	107
C.3.2.2	The TTCN Machine Processable form (TTCN.MP)	107
Annex D (informative): Justifications for requirements		108
Annex E (informative): Bibliography		109
Annex F (informative): The EN title in the official languages		110
History		111

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

All published ETSI deliverables shall include information which directs the reader to the above source of information.

Foreword

This Candidate Harmonized European Standard (Telecommunications series) has been produced by ETSI Project Terrestrial Trunked Radio (TETRA).

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC [1] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive") [1].

Technical specifications relevant to Directive 1999/5/EC [1] are given in annex A.

The present document is part 2 of a multi-part deliverable covering Harmonized EN for TETRA equipment covering essential requirements under article 3.2 of the R&TTE Directive, as identified below:

- Part 1: "Voice plus Data (V+D)": [SIST EN 303 035-2 V1.2.2:2004](https://standards.iteh.ai/catalog/standards/sist/5baa0210-07b6-4ae6-80f0-cc81e4bd4d/sist-en-303-035-2-v1-2-2-2004)
- Part 2: "Direct Mode Operation (DMO)": [SIST EN 303 035-2 V1.2.2:2004](https://standards.iteh.ai/catalog/standards/sist/5baa0210-07b6-4ae6-80f0-cc81e4bd4d/sist-en-303-035-2-v1-2-2-2004)

National transposition dates	
Date of latest announcement of this EN (doa):	30 April 2003
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 October 2003
Date of withdrawal of any conflicting National Standard (dow):	31 October 2004

Introduction

The present document is part of a set of standards designed to fit in a modular structure to cover all radio and telecommunications terminal equipment under the R&TTE Directive [1]. Each standard is a module in the structure. The modular structure is shown in figure 1.

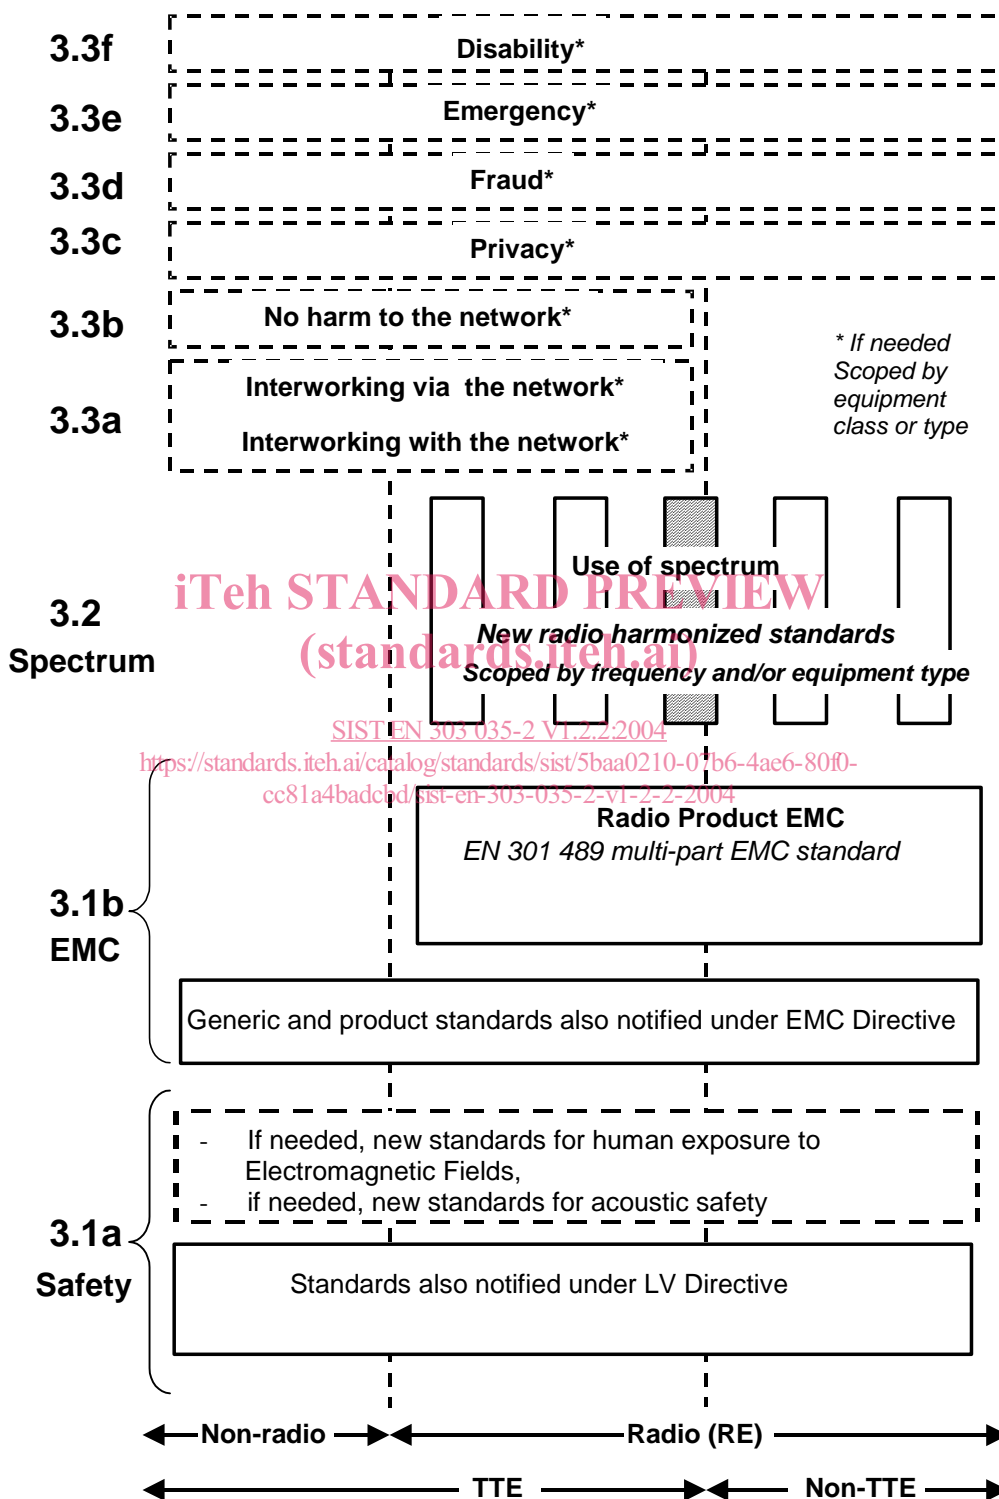


Figure 1: Modular structure for the various standards used under the R&TTE Directive

The left hand edge of the figure shows the different clauses of article 3 of the R&TTE Directive [1].

For article 3.3 various horizontal boxes are shown. Dotted lines indicate that at the time of publication of the present document essential requirements in these areas have to be adopted by the Commission. If such essential requirements are adopted, and as far and as long as they are applicable, they will justify individual standards whose scope is likely to be specified by function or interface type.

The vertical boxes show the standards under article 3.2 for the use of the radio spectrum by radio equipment. The scopes of these standards are specified either by frequency (normally in the case where frequency bands are harmonized) or by radio equipment type.

For article 3.1b the diagram shows EN 301 489, the multi-part product EMC standard for radio used under the EMC Directive [2].

For article 3.1a the diagram shows the existing safety standards currently used under the LV Directive [3] and new standards covering human exposure to electromagnetic fields. New standards covering acoustic safety may also be required.

The bottom of the figure shows the relationship of the standards to radio equipment and telecommunications terminal equipment. A particular equipment may be radio equipment, telecommunications terminal equipment or both. A radio spectrum standard will apply if it is radio equipment. An article 3.3 standard will apply as well only if the relevant essential requirement under the R&TTE Directive [1] is adopted by the Commission and if the equipment in question is covered by the scope of the corresponding standard. Thus, depending on the nature of the equipment, the essential requirements under the R&TTE Directive [1] may be covered in a set of standards.

The modularity principle has been taken because:

- it minimizes the number of standards needed. Because equipment may, in fact, have multiple interfaces and functions it is not practicable to produce a single standard for each possible combination of functions that may occur in an equipment;
- it provides scope for standards to be added:
 - under article 3.2 when new frequency bands are agreed; or
 - under article 3.3 should the Commission take the necessary decisions
 without requiring alteration of standards that are already published;
- it clarifies, simplifies and promotes the usage of Harmonized Standards as the relevant means of conformity assessment.

1 Scope

The present document specifies the technical characteristics to be provided by Terrestrial Trunked Radio (TETRA) radio and telecommunications terminal equipment, which uses the TETRA technology for Direct Mode Operation at the air interface to support the Direct Mode Operation (DMO) functionality.

The present document applies at the TETRA Direct Mode Operation (DMO) Air interface of the following radio and telecommunications terminal equipment types:

- 1) TETRA Direct Mode Mobile Station (DM-MS);
- 2) TETRA Direct Mode GATEway (DM-GATE);
- 3) TETRA Direct Mode REpeater type 1 (DM-REP1);
- 4) TETRA Direct Mode REpeater type 2 (DM-REP2).

In addition to the basic technical characteristics of a DM-MS required for operation with another DM-MS (MS-MS), the technical characteristics for operation with DM-GATE (MS-GW), DM-REP1 (MS-REP1) and DM-REP2 (MS-REP2) are specified.

It applies to terminal equipment operating within the frequency ranges, allocated to TETRA by the ERC Decisions ERC/DEC(96)01 [30] and ERC/DEC(96)04 [31].

These radio equipment types are capable of operating in all or any part of the frequency bands given in table 1.

Table 1: Radiocommunications service frequency bands

Type of Service	Radiocommunications service frequency bands (MHz)
Emergency Access, ERC/DEC(96)01 [30]	380 to 385
Emergency Access, ERC/DEC(96)01 [30]	390 to 395
Civil Access, ERC/DEC(96)04 [31]	410 to 430
Civil Access, ERC/DEC(96)04 [31]	870 to 876
Civil Access, ERC/DEC(96)04 [31]	915 to 921
Civil Access, ERC/DEC(96)04 [31]	450 to 470
Civil Access, ERC/DEC(96)04 [31]	385 to 390
Civil Access, ERC/DEC(96)04 [31]	395 to 399,99

The present document is intended to cover the provisions of Directive 1999/5/EC (R&TTE Directive) [1], article 3.2, which states that "radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference".

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of article 3 of the R&TTE Directive [1] will apply to equipment within the scope of the present document.

NOTE: A list of such ENs is included on the web site <http://www.newapproach.org/>.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

- [1] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).
- [2] Council Directive 89/336/EEC of 3 May 1989 on the approximation of the laws of the Member States relating to electromagnetic compatibility (EMC Directive).
- [3] Council Directive 73/23/EEC of 19 February 1973 on the harmonization of the laws of Member States relating to electrical equipment designed for use within certain voltage limits (LV Directive).
- [4] ETSI EN 300 394-1 (V2.3.1): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 1: Radio".
- [5] ETSI ETS 300 394-4-1 (Edition 1): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 4: Protocol testing specification for Direct Mode Operation (DMO); Sub-part 1: Test Suite Structure and Test Purposes (TSS&TP) for Mobile Station to Mobile Station (MS-MS) Air Interface (AI)".
- [6] ETSI ETS 300 394-4-2 (Edition 1): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 4: Protocol testing specification for Direct Mode Operation (DMO); Sub-part 2: Abstract Test Suite (ATS) for Mobile Station to Mobile Station (MS-MS) Air Interface (AI)".
- [7] ETSI EN 300 394-4-3 (V1.1.1): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 4: Protocol testing specification for Direct Mode Operation (DMO); Sub-part 3: Test Suite Structure and Test Purposes (TSS&TP) for Mobile Station (MS) Repeater type 1".
- [8] ETSI EN 300 394-4-4 (V1.1.1): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 4: Protocol testing specification for Direct Mode Operation (DMO); Sub-part 4: Test Suite Structure and Test Purposes (TSS&TP) for Direct Mode Repeater (DM-REP) type 1".
- [9] ETSI EN 300 394-4-5 (V1.1.1): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 4: Protocol testing specification for Direct Mode Operation (DMO); Sub-part 5: Abstract Test Suite (ATS) for Mobile Station (MS) Repeater type 1".
- [10] ETSI EN 300 394-4-6 (V1.1.1): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 4: Protocol testing specification for Direct Mode Operation (DMO); Sub-part 6: Abstract Test Suite (ATS) for Direct Mode Repeater (DM-REP) type 1".
- [11] ETSI ETS 300 394-4-7 (Edition 1): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 4: Protocol testing specification for Direct Mode Operation (DMO); Sub-part 7: Test Suite Structure and Test Purposes (TSS&TP) for Mobile Station to Gateway (MS-GW) Air Interface (AI)".

- [12] ETSI ETS 300 394-4-8 (Edition 1): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 4: Protocol testing specification for Direct Mode Operation (DMO); Sub-part 8: Test Suite Structure and Test Purposes (TSS&TP) for Direct Mode Gateway (DM-GATE)".
- [13] ETSI ETS 300 394-4-9 (Edition 1): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 4: Protocol testing specification for Direct Mode Operation (DMO); Sub-part 9: Abstract Test Suite (ATS) for Mobile Station (MS) Gateway".
- [14] ETSI ETS 300 394-4-10 (Edition 1): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 4: Protocol testing specification for Direct Mode Operation (DMO); Sub-part 10: Abstract Test Suite (ATS) for Direct Mode Gateway (DM-GATE)".
- [15] ETSI EN 300 394-4-11 (V1.1.1): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 4: Protocol testing specification for Direct Mode Operation (DMO); Sub-part 11: Test Suite Structure and Test Purposes (TSS&TP) for Mobile Station Repeater type 2".
- [16] ETSI EN 300 394-4-12 (V1.1.1): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 4: Protocol testing specification for Direct Mode Operation (DMO); Sub-part 12: Test Suite Structure and Test Purposes (TSS&TP) for Repeater type 2".
- [17] ETSI EN 300 394-4-13 (V1.1.1): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 4: Protocol testing specification for Direct Mode Operation (DMO); Sub-part 13: Abstract Test Suite (ATS) for Mobile station Repeater type 2".
- [18] ETSI EN 300 394-4-14 (V1.1.1): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 4: Protocol testing specification for Direct Mode Operation (DMO); Sub-part 14: Abstract Test Suite (ATS) for Repeater type 2".
- [19] ETSI ETS 300 396-2 (Edition 1): "Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 2: Radio aspects".
- [20] ETSI ETS 300 396-3 (Edition 1): "Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 3: Mobile Station to Mobile Station (MS-MS) Air Interface (AI) protocol".
- [21] ETSI EN 300 396-4 (V1.2.1): "Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 4: Type 1 repeater air interface".
- [22] ETSI ETS 300 396-5 (Edition 1): "Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 5: Gateway air interface".
- [23] Void.
- [24] ETSI EN 300 396-7 (V1.2.1): "Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 7: Type 2 repeater air interface".
- [25] ETSI ETS 300 396-8-1 (Edition 1): "Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 8: Protocol Implementation Conformance Statement (PICS) proforma specification; Sub-part 1: Mobile Station to Mobile Station (MS-MS) Air Interface (AI)".
- [26] ETSI EN 300 396-8-2 (V1.1.1): "Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 8: Protocol Implementation Conformance Statement (PICS) proforma specification; Sub-part 2: Type 1 repeater Air Interface (AI)".
- [27] ETSI ETS 300 396-8-3 (Edition 1): "Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 8: Protocol Implementation Conformance Statement (PICS) proforma specification; Sub-part 3: Gateway Air Interface (AI)".
- [28] ETSI EN 300 396-8-4 (V1.1.1): "Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 8: Protocol Implementation Conformance Statement (PICS) proforma specification; Sub-part 4: Type 2 Repeater Air Interface (AI)".

- [29] ETSI TS 100 396-10 (V1.1.1): "Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 10: Managed Direct Mode Operation (M-DMO)".
- [30] CEPT ERC/DEC(96)01: "ERC Decision of 7 March 1996 on the harmonised frequency band to be designated for the introduction of the Digital Land Mobile System for the Emergency Services".
- [31] CEPT ERC/DEC(96)04: "ERC Decision of 7 March 1996 on the frequency bands for the introduction of the Trans European Trunked Radio System (TETRA)".
- [32] ETSI ETR 028 (Edition 2): "Radio Equipment and Systems (RES); Uncertainties in the measurement of mobile radio equipment characteristics".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in the R&TTE Directive [1] and the following apply:

acknowledged data transfer: service provided by the layer below which gives an acknowledgement back over the air interface from the lower layer peer entity

NOTE: This service is used by the layer 3 entities to get a secure transmission including re-transmissions.

changeover: within a call, the process of effecting a transfer of the master role (and hence transmitting MS) at the end of one call transaction so that another can commence

Direct Mode (DM): mode of simplex operation where mobile subscriber radio units may communicate using radio frequencies which may be monitored by, but which are outside the control of, the TETRA V+D network

NOTE: DM is performed without intervention of any base station.

Direct Mode Call Control (DMCC): Layer 3 entity responsible for setting up and maintaining a call in DMO

Direct Mode channel: specific grouping of timeslots in the DM multiplex structure related to a particular DM RF carrier, i.e. DM frequency (or to a pair of duplex-spaced RF carriers for operation with a type 1B or type 2 DM-REP)

NOTE: The grouping may not always be fixed, but in DMO when operating in frequency efficient mode as an example, there are two DM channels, identified by the letters A and B.

Direct Mode GATEway (DM-GATE): device which provides gateway connectivity between a DM-MS and the TETRA V+D network

NOTE: The gateway provides the interface between TETRA DMO and TETRA V+D mode.

Direct Mode Mobility Management (DMMM): Layer 3 entity responsible for registration to a gateway in DMO

Direct Mode Mobile Station (DM-MS): physical grouping that contains all of the mobile equipment that is used to obtain TETRA DM services

Direct Mode REPeater (DM-REP): device that operates in TETRA DMO and provides a repeater function to enable two or more DM-MSs to extend their coverage range

NOTE: It may be either a DM-REP type 1, supporting a single call on the air interface, or a DM-REP type 2, supporting two calls on the air interface. A DM-REP type 1 may operate on either a single RF carrier (DM-REP type 1A) or a pair of duplex-spaced RF carriers (DM-REP type 1B). A DM-REP type 2 operates on a pair of duplex-spaced RF carriers.

DM-REP presence signal: message transmitted by a DM-REP in order to indicate its presence on an RF carrier

DM-REP type 1: DMO Repeater that supports a single call on the air interface. There are two varieties of type 1 DM-REP:

- **DM-REP type 1A:** which operates on a single RF carrier;
- **DM-REP type 1B:** which operates on a pair of duplex-spaced RF carriers, one used as the "uplink" from DM-MSs to the DM-REP and the other used as the "downlink" from the DM-REP to DM-MSs.

DM-REP type 2: DMO Repeater that is capable of supporting two simultaneous type 2 calls on the air interface

NOTE: A type 2 DM-REP operates on a pair of duplex-spaced RF carriers, one used as the "uplink" from DM-MSs to the DM-REP and the other used as the "downlink" from the DM-REP to DM-MSs. The protocol for type 2 calls through a type 2 DM-REP is based on the protocol for frequency efficient mode in ETS 300 396-3 [20]. (A DM-REP type 2 may also optionally offer type 1B calls using the protocol defined in EN 300 396-4 [21]).

environmental profile: range of environmental conditions under which equipment within the scope of EN 303 035-2 is required to comply with the provisions of EN 303 035-2

Individual TETRA Subscriber Identity (ITSI): identity used to specify an individual TETRA user

NOTE: An ITSI cannot be shared by multiple users.

Linearization CHannel (LCH): channel, which may be used by the equipment to linearize its transmitter

NOTE: The linearization burst contains no useful bits.

logical channel: generic term for any distinct data path. Logical channels are considered to operate between logical endpoints

Managed DMO (M-DMO): direct interworking between two DMO Mobile Stations under control of a network by a management mechanism to avoid interference

master: Direct Mode equipment that is either active in a call transaction transmitting traffic or control data, or is reserving the channel by means of channel reservation signalling and hence is providing synchronization information to the channel

presence signal: message transmitted by a DM-REP or a gateway in order to indicate its presence on an RF carrier

slave: Direct Mode equipment that is receiving traffic and/or signalling and hence is deriving synchronization information from the channel

solicited registration: registration request which is made by a DM-MS during a registration phase initiated by a gateway

surveillance: process of determining the current state of the DM RF carrier for DMO

TETRA Equipment Identity (TEI): electronic serial number that is permanently embedded in the TETRA equipment

unacknowledged data transfer: service provided by the layer below which does not give any acknowledgement back to over the air interface from the lower layer peer entity

useful part of the burst: modulation symbol times SN0 to SNmax of a burst

unsolicited registration: registration request, which is made by a DM-MS at any time other than within a registration phase

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ATS	Abstract Test Suite
BI	Behaviour Invalid
CA	CApability test
CM	Circuit Mode