


Edition 3.0 2012-03

INTERNATIONAL STANDARD



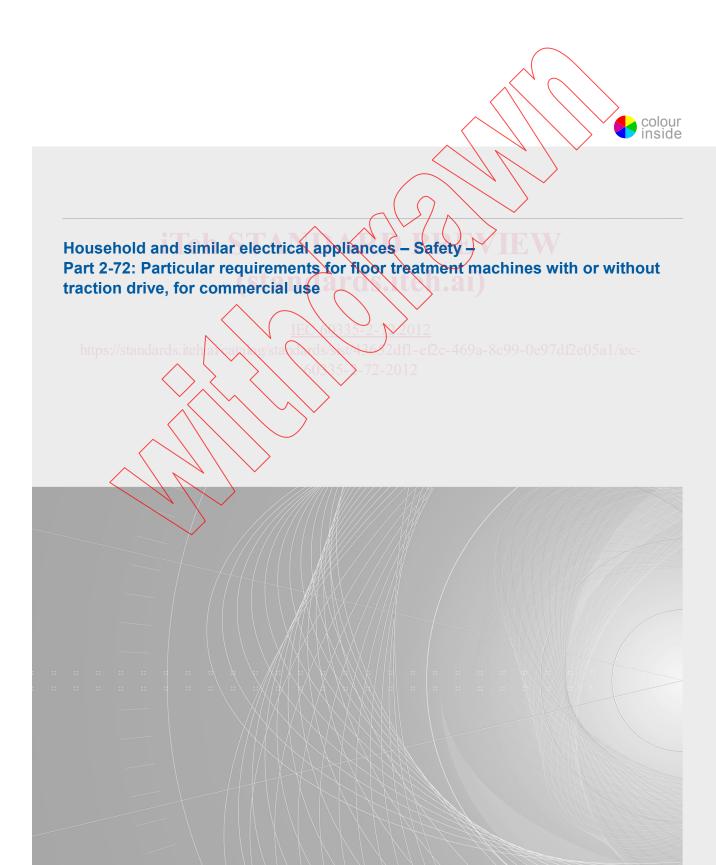

THIS PUBLICATION IS COPYRIGHT PROTECTED Copyright © 2012 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office Tel.: +41 22 919 02 11 3, rue de Varembé Fax: +41 22 919 03 00

CH-1211 Geneva 20 info@iec.ch Switzerland www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...).

It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.


https://standards.iteh al-catch g/standards/s

2df1-ef2c-469a-8c99-0e97df2e05a1/iec-




Edition 3.0 2012-03

INTERNATIONAL STANDARD

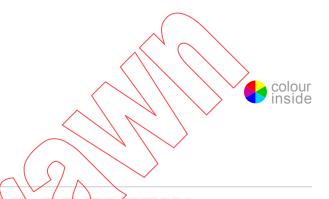

Household and similar electrical appliances - Safety

Part 2-72: Particular requirements for floor treatment machines with or without traction drive, for commercial use

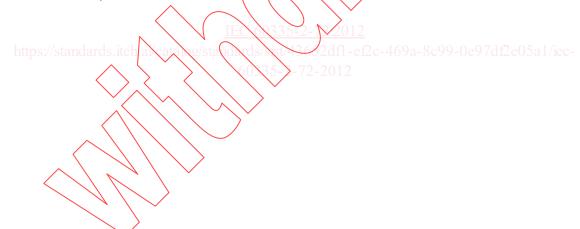

INTERNATIONAL ELECTROTECHNICAL COMMISSION

PRICE CODE XA

ISBN 978-2-8322-0069-8

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOI	REWORD	4
INT	RODUCTION	7
1	Scope	8
2	Normative references	9
3	Terms and definitions	10
4	General requirement	13
5	General conditions for the tests	13
6	Classification	13
7	Marking and instructions	14
8	Protection against access to live parts	18
9	Starting of motor-operated appliances	18
10	Power input and current	18
11	Heating	18
12	Void	19
13	Leakage current and electric strength at operating temperature	19
14	Transient overvoltages	19
15	Moisture resistance	19
16	Leakage current and electric strength	20
17	Overload protection of transformers and associated circuits	21
18	Endurance Endurance	
19	Abnormal operation	21
20	Stability and mechanical hazards572-2012	22
21	Mechanical strength	27
22	Construction	29
23	Internal wiring.	34
24	Components	34
25	Supply connection and external flexible cords	34
26	Terminals for external conductors	35
27	Provision for earthing	36
28	Screws and connections	36
29	Clearances, creepage distances and solid insulation	36
30	Resistance to heat and fire	36
31	Resistance to rusting	36
32	Radiation, toxicity and similar hazards	36
Anr	nexes	41
Anr	nex B (normative) Appliances powered by rechargeable batteries	42
Anr	nex AA (normative) Precast paving slabs	48
Anr	nex BB (normative) Requirements for internal combustion engine powered chines using liquefied petroleum gas (LPG)	
Anr	nex CC (normative) Falling-object protective structures (FOPS) – Dynamic test and formance requirements	

Annex DD (informative) Emission of acoustical noise	55
Annex EE (informative)	58
Bibliography	59
Figure 101 – Impact test apparatus	37
Figure 102 – Apparatus for testing the abrasion resistance of current-carrying hoses	38
Figure 103 – Apparatus for testing the resistance to flexing of current-carrying hoses	39
Figure 104 – Configuration of the hose for the freezing treatment	39
Figure 105 – Flexing positions for the hose after removal from the freezing cabinet	40
Figure 106 – Warning symbol: Do not inhale exhaust fumes	40
Figure B.101 – Forms of constructions for cleaning machines covered by Annex B	43
Figure B.102 – Circuit for testing battery chargers (taken from IEC 60335-2-29)	47
Figure CC.1 – Satisfactory protection by the overhead guard	53
Figure CC.2 – Admissible deformation when the overhead guard is supported at all sides	54
Figure CC.3 – Admissible deformation when the overhead guard is supported at one side	54
Table 12 – Pull force and torque	35
Table DD.1 – Determination of uncertainty.	57
https://standards.iteh/al-cato/vo/standards/sst/35632df1-ef2c-469a-8c99-0e97df2e05a1/i	

INTERNATIONAL ELECTROTECHNICAL COMMISSION

HOUSEHOLD AND SIMILAR ELECTRICAL APPLIANCES – SAFETY –

Part 2-72: Particular requirements for floor treatment machines with or without traction drive, for commercial use

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60335-2-72 has been prepared by subcommittee 61J: Electrical motor-operated cleaning appliances for commercial use, of IEC technical committee 61: Safety of household and similar electrical appliances.

This third edition cancels and replaces the second edition published in 2002 and its Amendment 1 (2005). It constitutes a technical revision.

The principal changes in this edition as compared with the second edition of IEC 60335-2-72 are as follows (minor changes are not listed):

The standard has be revised completely and changed significantly, in particular with regard to the following clauses:

- the title has been changed for better distinction with regard to IEC 60335-2-67;
- the scope has been revised editorially to avoid misunderstandings;
- Clause 3 has been revised with regard to the requirements revised;
- the standard has been revised in general and updated regarding state-of-the-art, as far as necessary, in particular some changes have been made to Clauses 15, 22, and 25;
- the markings and instructions (Clause 7) have been revised basically;
- a new Annex DD 'Emission of acoustical noise' was added; and
- a new Annex EE 'Emission of vibration' was added.

The text of this standard is based on the following documents:

FDIS	Report on voting	/
61J/491/FDIS	61J/500/RVD	

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

This part 2 is to be used in conjunction with the latest edition of IEC 60335-1 and its amendments. It was established on the basis of the fifth edition (2010) of that standard.

NOTE 1 When "Part 1" is mentioned in this standard, it refers to EC 60335-1.

This part 2 supplements or modifies the corresponding clauses in IEC 60335-1, so as to convert that publication into the IEC standard: Safety requirements for floor treatment machines with or without traction drive, for commercial use.

When a particular subclause of Part 1 is not mentioned in this part 2, that subclause applies as far as is reasonable. When this standard states "addition", "modification" or "replacement", the relevant text in Part 1 is to be adapted accordingly.

NOTE 2 The following numbering system is used:

- subclauses, tables and figures that are numbered starting from 101 are additional to those in Part 1;
- unless notes are in a new subclause or involve notes in Part 1, they are numbered starting from 101, including those in a replaced clause or subclause;
- additional annexes are lettered AA, BB, etc.

NOTE 3 The following print types are used:

- requirements: in roman type;
- test specifications: in italic type;
- notes: in small roman type.

Words in **bold** in the text are defined in Clause 3. When a definition concerns an adjective, the adjective and the associated noun are also in bold.

A list of all parts of the IEC 60335 series, under the general title: Household and similar electrical appliances – Safety, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- · replaced by a revised edition, or
- · amended.

A bilingual version of this standard may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.



INTRODUCTION

It has been assumed in the drafting of this International Standard that the execution of its provisions is entrusted to appropriately qualified and experienced persons.

This standard recognizes the internationally accepted level of protection against hazards such as electrical, mechanical, thermal, fire and radiation of appliances when operated as in normal use taking into account the manufacturer's instructions. It also covers abnormal situations that can be expected in practice and takes into account the way in which electromagnetic phenomena can affect the safe operation of appliances.

This standard takes into account the requirements of IEC 60364 as far as possible so that there is compatibility with the wiring rules when the appliance is connected to the supply mains. However, national wiring rules may differ.

If an appliance within the scope of this standard also incorporates functions that are covered by another part 2 of IEC 60335, the relevant part 2 is applied to each function separately, as far as is reasonable. If applicable, the influence of one function on the other is taken into account.

When a part 2 standard does not include additional requirements to cover hazards dealt with in Part 1, Part 1 applies.

NOTE 1 This means that the technical committees responsible for the part 2 standards have determined that it is not necessary to specify particular requirements for the appliance in question over and above the general requirements.

This standard is a product family standard dealing with the safety of appliances and takes precedence over horizontal and generic standards covering the same subject.

NOTE 2 Horizontal and generic standards covering a hazard are not applicable since they have been taken into consideration when developing the general and particular requirements for the IEC 60335 series of standards. For example, in the case of temperature requirements for surfaces on many appliances, generic standards, such as ISO 13732-1 for hot surfaces, are not applicable in addition to Part 1 or part 2 standards.

An appliance that complies with the text of this standard will not necessarily be considered to comply with the safety principles of the standard if, when examined and tested, it is found to have other features that impair the level of safety covered by these requirements.

An appliance employing materials or having forms of construction differing from those detailed in the requirements of this standard may be examined and tested according to the intent of the requirements and, if found to be substantially equivalent, may be considered to comply with the standard.

HOUSEHOLD AND SIMILAR ELECTRICAL APPLIANCES – SAFETY –

Part 2-72: Particular requirements for floor treatment machines with or without traction drive, for commercial use

1 Scope

This clause of Part 1 is replaced by the following.

This International Standard deals with the safety of powered ride-on and powered walk-behind machines intended for commercial indoor or outdoor use for the following applications:

- sweeping,
- scrubbing,
- wet or dry pick-up,
- polishing,
- application of wax, sealing products and powder based detergents,
- shampooing

of floors with an artificial surface.

Their cleaning motion is more linear than lateral or periodic.

NOTE 101 By contrast, the cleaning motion of machines covered by IEC 60335-2-67 is more lateral or periodic than linear.

NOTE 102 This standard applies to machines for commercial use. The following list, although not comprehensive, gives an indication of locations that are included in the scope:

- public use areas such as hotels, schools, hospitals;
- industrial locations, for example factories and manufacturing shops;
- retail outlets, for example shops and supermarkets;
- business premises, for example offices and banks;
- all uses other than normal housekeeping purposes.

They may be equipped with a **traction drive** system. The following power systems are covered:

- internal combustion engines,
- mains powered motors up to a rated voltage of 250 V for single-phase appliances and 480 V for other appliances,
- battery powered motors.

Battery powered machines may be equipped with a built-in battery charger.

This standard does not apply to

- floor treatment appliances for household use according to IEC 60335-2-10;
- floor treatment machines for commercial use according to IEC 60335-2-67;
- spray extraction machines for **commercial use** (IEC 60335-2-68);

- wet and dry vacuum cleaners, including power brush, for commercial use (IEC 60335-2-69);
- road sweepers;

NOTE 103 In Europe, EN 13019 covers road sweepers.

- machines designed for use on slopes with a gradient exceeding 20 %;
- machines equipped with a power take-off (PTO);
- machines designed for use in corrosive or explosive environments (dust, vapour or gas);
- machines designed for picking up hazardous dusts (as defined in IEC 60335-2-69), inflammable substances, or glowing particles;
- machines designed for use in vehicles or on board of ships or aircraft

NOTE 104 Attention is drawn to the fact that

- in many countries additional requirements on the safe use of the equipment covered can be specified by the
 national health authorities, the national authorities responsible for the protection of labour, the national water
 supply authorities and similar authorities;
- ride-on machines designed for transport over public roads can be subject to additional requirements (e.g. lighting, license plate etc.).

2 Normative references

This clause of Part 1 is applicable except as follows

Addition:

IEC 60312-1, Vacuum cleaners for household use – Part 1: Dry vacuum cleaners – Methods for measuring the performance

IEC 62061, Safety of machinery – Functional safety of safety-related electrical, electronic and programmable electronic control systems

ISO 3411, Earth moving machinery – Human physical dimensions of operators and minimum operator space envelope

ISO 5353, Earth-moving machinery, and tractors and machinery for agriculture and forestry – Seat index point

ISO 6344-2, Coated abrasives – Grain size analysis – Part 2: Determination of grain size distribution of macrogrits P12 to P220

ISO 13849-1, Safety of machinery – Safety-related parts of control systems – Part 1: General principles for design

ISO 13857, Safety of machinery – Safety distances to prevent hazard zones being reached by the upper and lower limbs

ISO 25119 (all parts), Tractors and machinery for agriculture and forestry – Safety-related parts of control systems

Replacement:

IEC 60068-2-78:2001, Environmental testing – Part 2-78: Tests – Test Cab: Damp heat, steady state

3 Terms and definitions

This clause of Part 1 is applicable except as follows.

3.1.9 Replacement:

normal operation

conditions under which the machine is operated in normal use, as intended by the manufacturer

It denotes the load corresponding to the **rated power input** or the highest obtainable load of all particular loads of the various functions that can be operated at the same time in accordance with the manufacturer's instructions. For machines provided with a seat or an **operator** platform, a mass of 75 kg secured in position at the appropriate height is used to simulate the **operator** in the most unfavourable position.

Socket-outlets for accessories are loaded with a resistive load in accordance with the marking.

Operational functions include all treatment and driving functions.

The **normal operation** related to the operational functions is specified in 3.1.9.101 to 3.1.9.103:

3.1.9.101 Scrubbing and sweeping machines are operated on a surface of hydraulically pressed concrete paving slabs (see Annex AA) intermittently at least 30 min switched on, and for a period of 5 min switched off.

An alternative is a smooth concrete area of a surface consistency comparable with hydraulically pressed concrete paving slabs.

3.1.9.102 Polishing and dry buffing machines are operated as follows.

https://standards.iteh/a/cak/lg/sta/ld/ds/st----2df1-ef2c-469a-8c99-0e9/df2e05a1/iec-

PVC- or comparable flooring surfaces are considered to be suitable for establishing normal operation. The peak of input occurring during the drying process of the chemical applied to treat the surface is not taken as normal operation but is averaged by extending measurements over a period of at least 10 min.

3.1.9.103 Carpet shampovers are operated on a test surface consisting of a carpet, in accordance with IEC 60312-1, the carpet being fastened to the floor.

Prior to testing, the brush of the shampooing machine is conditioned by operating it for 15 min on a clean, dry concrete surface. After running on the concrete surface, the brush is immersed in a shampoo solution for at least 30 min.

The solution tank is filled and the machine is operated over a period of 10 min.

3.101

traction drive

system used to propel the machine, e.g. by powered wheels

Traction by the effect of rotating brushes is not included.

3.102

walk-behind machine

machine with or without a **traction drive** designed to be controlled by the **operator** walking behind the machine

It may be equipped with a detachable sulky.

3.103

ride-on machine

machine with a **traction drive** and with an **operator** seat or a platform on which the **operator** is sitting/standing during operation

3.104

sulky (trailer)

removable trailing seat or stand-on platform with wheels or skids designed to carry an operator in a sitting or standing position, while controlling a walk-behind machine with traction drive

3.105

wet cleaning machine

machine for applying and sucking up liquids

3.106

water-suction cleaning machine

machine for sucking up liquids

3.107

motorized cleaning head

hand-held or hand-guided cleaning device connected to the machine, with an integrated electrical motor

Note 1 to entry: The main cleaning head permanently attached is not regarded as a motorized cleaning head.

3.108

hopper

container to store picked up debris

3.109

parking brake

means, actuated by the **operator** in the normal operating position, to prevent a stationary machine from moving

3.110

service brake

means for decelerating and stopping a machine, with a traction drive, from its ground travel speed

3.111

operator presence control

OPC

control device that automatically interrupts the power, e.g. to a drive or an engine, when the **operator**'s actuating force is removed

Note 1 to entry: Such devices can be, for example, continuous action controls ("hold-to-run" controls) or seat switches.

3.112

guard

part of the machine specifically designed to provide protection by means of a physical barrier, such as, for example, a casing, a shield, a cover, a screen, a door, an enclosure or a fence; other parts of the machine that fulfil a primarily operational function, such as, for example, the frame of the machine, may also fulfil a protective function but are not referred to as **guards**

Note 1 to entry: Three main kinds of **guards** can be distinguished: fixed **guards**, interlocking moveable **guards** and adjustable **guards**. Interlocking movable **guards** are required where frequent access is envisaged, while fixed **guards** can be used where frequent access is not envisaged.

3.113

operator

person installing, operating, adjusting, cleaning, moving, or performing user maintenance on the machine

3.114

gross vehicle weight

GVW

maximum allowable fully laden weight of the machine and its payload, as ready for use

Note 1 to entry: See 5.102 for further test conditions.

3.115

test solution

solution which consists of 20 g of NaCl and 1 ml of a solution of 28 % by mass of dodecyl sodium sulphate in each 8 l of water

Note 1 to entry: The chemical designation of dodecyl sodium sulphate is C₁₂H₂₅NaSO₄.

3.116

level surface

plane with a gradient up to and including 2 %

3.117

slope

inclined plane with a gradient greater than 2 % but not exceeding 20 %

3.118

maximum cleaning gradeability

maximum gradient according to manufacturer's instruction and as indicated on the machine, on which the machine can be used safely for cleaning purposes

https://standards.itel

3.119

maximum transport gradeability

maximum gradient according to manufacturer's instruction, on which the machine can be used safely for transport purposes

3.120

built-in charger

charger mounted on or into the machine and designed to operate only on or into the machine.

Note 1 to entry: **Built-in chargers** can also be called on-board chargers.

3.121

built-in charger with power supply function

component intended to provide power for charging, operation or both

3.122

commercial use

intended use of machines covered by this standard, i.e. not intended for normal housekeeping purposes by private persons but which may be a source of danger to the public

I.e. in particular that

- the machines may be used by cleaning contractors, cleaning staff, etc.;
- they are used in commercial or public premises (i.e. offices, shops, hotels, hospitals, schools, etc.) or in industrial (plants etc.) and light industrial (workshops etc.) environments.

Note 1 to entry: **Commercial use** is also called professional use.

4 General requirement

This clause of Part 1 is applicable except as follows:

Replacement of the first paragraph by the following:

Machines shall be constructed so that they function safely so as to cause no danger to persons or surroundings during normal use, even in the event of carelessness, and during installation, adjusting, maintenance, cleaning, repairing or transportation.

Addition:

For the purposes of this standard, the term 'appliance' as used in Part 1 is to be read as 'machine'.

5 General conditions for the tests

This clause of Part 1 is applicable except as follows.

- **5.101** The **test solution** is to be stored in a cool atmosphere and used within seven days after its preparation.
- **5.102** The **GVW** includes, if applicable, full clean water tanks, empty dirty water tanks (half full for recycling systems), empty dust bags, **hopper** loaded at rated capacity, largest recommended batteries, all options such as cords, hoses, wands, cleaning agents, brooms and brushes.

For ride-on machines, the GVW includes a standard operator, weighing 75 kg.

F 102 Liquid containers of machines for wat parulhing and champaging are filled to t

- **5.103** Liquid containers of machines for wet scrubbing and shampooing are filled to the highest level indicated by the manufacturer.
- **5.104** Machines that are designed to have a **sulky** are tested with the **sulky** including the weight of a standard **operator** (75 kg) or without the **sulky**, whichever is the most unfavourable condition.

6 Classification

This clause of Part Lis applicable except as follows.

6.1 Replacement:

Machines shall be one of the following classes with respect to the protection against electric shock:

- class I,
- class II, or
- class III.

Compliance is checked by inspection and by the relevant tests.