



SLOVENSKI STANDARD
SIST ISO 10228:1995
01-december-1995

HY_Uý_Y'ga i J!'DcXfc Ÿ'a cbHŸY'j Ufbcgfb]` j Yn]!'NU HŸj Y'nUj J'U_Y'nU
dfYg_i ýUbŸ

Cross-country skis -- Binding mounting area -- Requirements for test screws

Skis de fond -- Zone de montage de la fixation -- Exigences pour des vis d'essai
(standards.iteh.ai)

Ta slovenski standard je istoveten z: ISO 10228:1991

<https://standards.iteh.ai/catalog/standards/sist/82fefa96-5278-49d1-abbd-e5d8c393ed90/sist-iso-10228-1995>

ICS:

97.220.20 Oprema za zimske športe Winter sports equipment

SIST ISO 10228:1995

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 10228:1995

<https://standards.iteh.ai/catalog/standards/sist/82fe96-5278-49d1-abbd-e5d8c393ed90/sist-iso-10228-1995>

INTERNATIONAL STANDARD

ISO
10228

First edition
1991-12-01

Cross-country skis — Binding mounting area — Requirements for test screws

iTeh STANDARD PREVIEW
*Skis de fond — Zone de montage de la fixation — Exigences pour des vis
d'essai*
(standards.iteh.ai)

SIST ISO 10228:1995

<https://standards.iteh.ai/catalog/standards/sist/82fe96-5278-49d1-abbd-e5d8c393ed90/sist-iso-10228-1995>



Reference number
ISO 10228:1991(E)

ISO 10228:1991(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 10228 was prepared by Technical Committee ISO/TC 83, *Sports and recreational equipment*, Sub-Committee SC 4, *Skis and snowboards*.

<https://standards.iteh.ai/catalog/standards/sist/82fefa96-5278-49d1-abbd-e5d8c393ed90/sist-iso-10228-1995>

© ISO 1991

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Introduction

The use of test screws ensures the comparability of measurement data, which are determined by the manufacturer or other institutions by testing the binding mounting area of cross-country skis.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ISO 10228:1995](https://standards.iteh.ai/catalog/standards/sist/82fe96-5278-49d1-abbd-e5d8c393ed90/sist-iso-10228-1995)

<https://standards.iteh.ai/catalog/standards/sist/82fe96-5278-49d1-abbd-e5d8c393ed90/sist-iso-10228-1995>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

This page intentionally left blank

[SIST ISO 10228:1995](#)

<https://standards.iteh.ai/catalog/standards/sist/82fe96-5278-49d1-abbd-e5d8c393ed90/sist-iso-10228-1995>

Cross-country skis — Binding mounting area — Requirements for test screws

1 Scope

This International Standard specifies the dimensions, mechanical properties and fastening characteristics of test screws used for testing the binding mounting area of cross-country skis.¹⁾

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 1478:1983, *Tapping screws thread*.

ISO 2702:1974, *Heat-treated steel tapping screws — Mechanical properties*.

ISO 4042:1989, *Threaded components — Electroplated coatings*.

ISO 4757:1983, *Cross recesses for screws*.

ISO 7794:1991, *Cross-country skis — Ski binding screws — Requirements*.

ISO 7795:1984, *Cross-country skis — Ski binding screws — Test methods*.

3 Definitions

For the purposes of this International Standard, the definitions given in ISO 7794 and the following definition apply.

3.1 test screw: A fastener, which is used for testing the binding mounting area to ensure the comparability of measurement data.

4 Designation

Designation of a test screw according to this International Standard with a nominal diameter of 6,3 mm and a length of 18 mm:

Test screw ISO 10228 — XCTBS 6,3 × 18

5 Requirements

The strength requirements and typical application characteristics shall be tested according to ISO 7795.

5.1 Materials

Steel according to ISO 2702, complying with the requirements of this International Standard.

5.2 Dimensions

5.2.1 Screw head

Test screws shall

- have a head diameter of $(9,5 \begin{smallmatrix} +0,2 \\ -0,0 \end{smallmatrix})$ mm and
- be cross-recess type Z No. 3 according to ISO 4757, with a recommended penetration depth of 2,72 mm to 3,18 mm.

1) Details of suitable test screws and test assemblies can be obtained from the Secretariat of ISO/TC 83/SC 4 (ON, Austria) or from the ISO Central Secretariat.

5.2.2 Thread and end configuration

The cross-section of the screw may be circular or non-circular within the major diameter of $(6,3 \begin{smallmatrix} 0 \\ -0,15 \end{smallmatrix})$ mm (see figure 1).

The thread length shall be at least 1 mm longer than the penetration depth, irrespective of the shaft length. The tolerance on the length of the screw shall be $\pm 0,6$ mm.

The shaft end shall correspond to figure 1.

5.3 Surface

Test screws shall have a zinc electroplated coating, Fe/Zn 5 c (see ISO 4042), with a clear chromate conversion coating and a thickness of 10 μ m when measured on the top surface of the screw head.

Adequate precautions shall be taken during electroplating to avoid hydrogen embrittlement.

Dimensions in millimetres

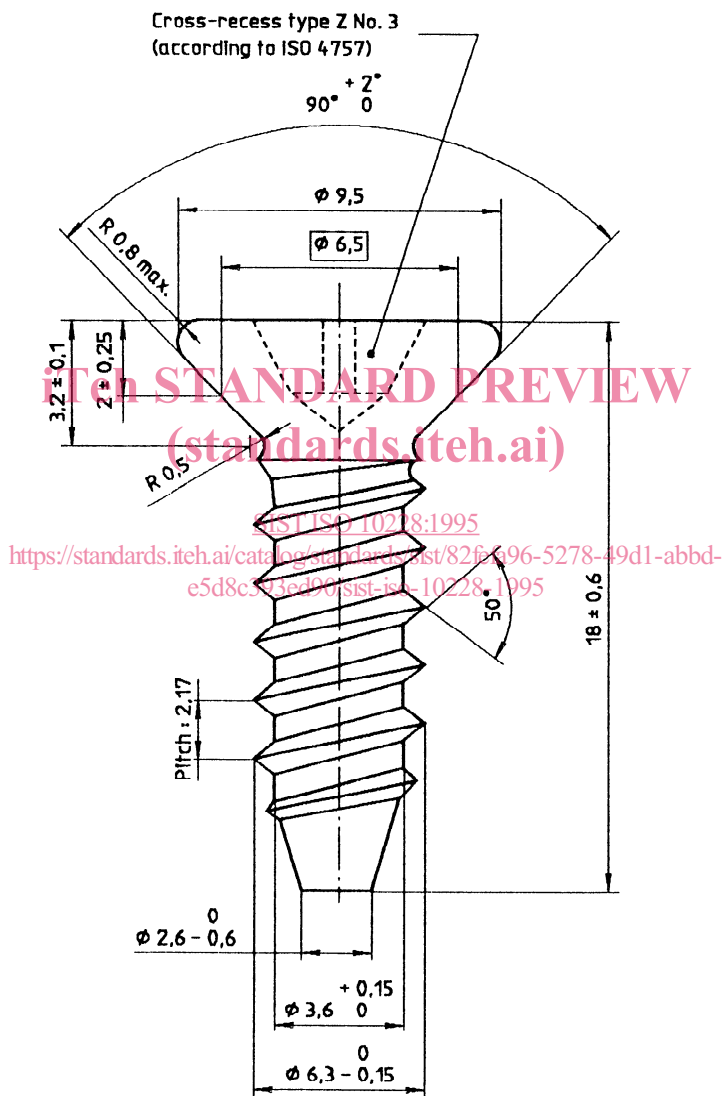


Figure 1 — Head, thread and end configuration