

INTERNATIONAL STANDARD

**Fibre optic interconnecting devices and passive components – Performance standard –
Part 089-2: Non-connectorized single-mode bidirectional OTDR monitoring
WWDM devices for category C – Controlled environment**

IEC 61753-089-2:2013

<https://standards.iteh.ai/catalog/standards/iec/939ae155-8b2d-4137-ab14-f9f2acebb87c/iec-61753-089-2-2013>



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2013 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.
If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...).

It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

IEC 61753-089-2:2013

<https://standards.iteh.ai/catalog/standards/iec/9399e155-8b2d-4137-ab14-f9f2acebb87c/iec-61753-089-2-2013>

INTERNATIONAL STANDARD

**Fibre optic interconnecting devices and passive components – Performance standard –
Part 089-2: Non-connectorized single-mode bidirectional OTDR monitoring
WWDM devices for category C – Controlled environment**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE

P


ICS 33.180.20

ISBN 978-2-83220-651-5

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references	5
3 Terms and definitions	6
4 Test.....	6
5 Test report.....	7
6 Performance requirements	7
6.1 Reference components.....	7
6.2 Dimensions	7
6.3 Sample size	7
6.4 Test details and requirements	7
Annex A (normative) Sample size	12
Annex B (Informative) General information for OTDR monitoring WWDM device.....	13
Bibliography.....	15
Figure B.1 – Functional principle of a monitoring WWDM device.....	13
Figure B.2 – Example for the integration of the OTDR monitoring WWDM at central office and customer side.....	14
Table 1 – Test details and requirements (1 of 5).....	7
Table A.1 – Sample size	12

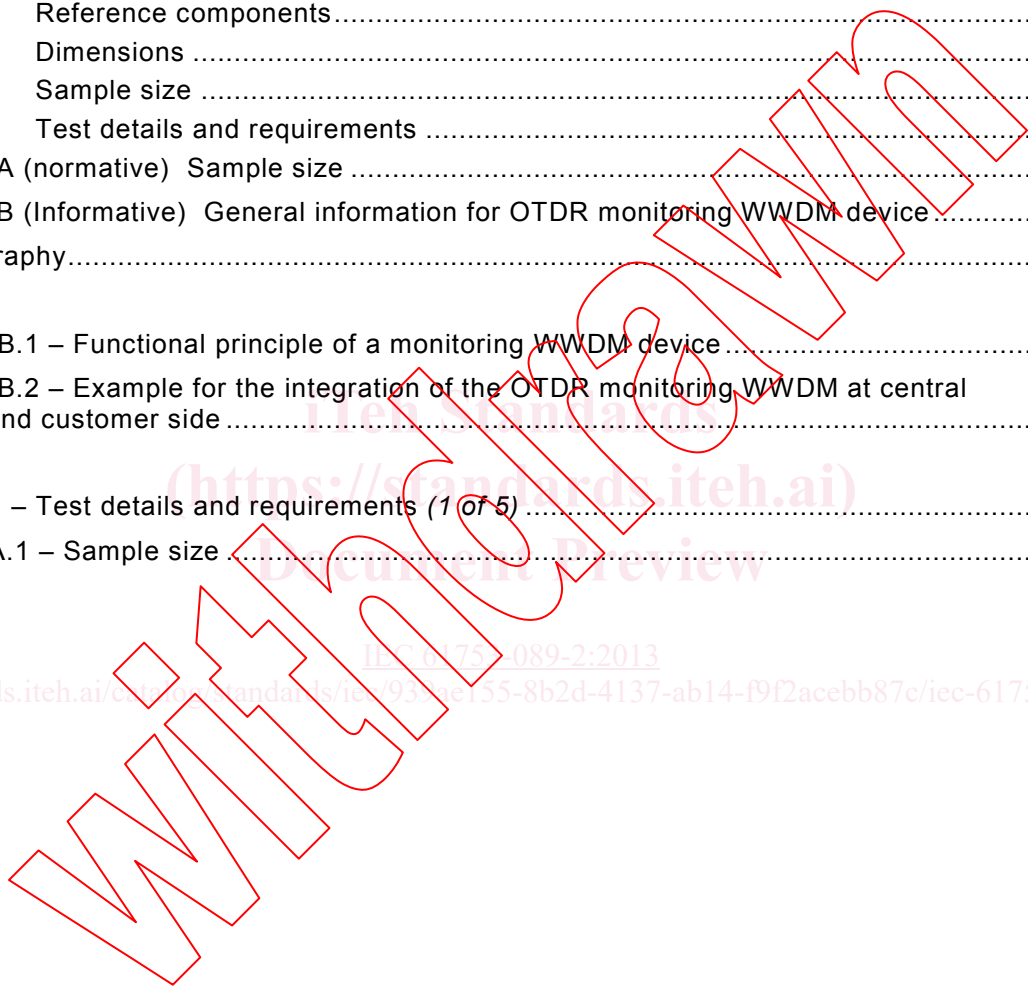

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**FIBRE OPTIC INTERCONNECTING
DEVICES AND PASSIVE COMPONENTS –
PERFORMANCE STANDARD –**

**Part 089-2: Non-connectorized single-mode bidirectional
OTDR monitoring WWDM devices for category C –
Controlled environment**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61753-089-2 has been prepared by subcommittee 86B: Fibre optic interconnecting devices and passive components of IEC technical committee 86: Fibre optics.

The text of this standard is based on the following documents:

CDV	Report on voting
86B/3454/CDV	86B/3529/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of IEC 61753 series, under the general title *Fibre optic interconnecting devices and passive components – Performance standard*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

Withdawn

iTech Standards
(<https://standards.itih.ai>)
Document Preview

[IEC 61753-089-2:2013](https://standards.itih.ai/iec-61753-089-2-2013)

<https://standards.itih.ai/iec-61753-089-2-2013>

FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – PERFORMANCE STANDARD –

Part 089-2: Non-connectorized single-mode bidirectional OTDR monitoring WWDM devices for category C – Controlled environment

1 Scope

This part of IEC 61753 contains the minimum initial performance, test and measurement requirements and severities which a fibre optic pigtailed wide wavelength division multiplexing (WWDM) device for monitoring passive optical networks (PON) using an optical time-domain reflectometer (OTDR) satisfies in order to be categorized as meeting the requirements of category C (controlled environments), as defined in Annex A of IEC 61753-1:2007.

Annex B of this standard provides information concerning the principle and function of the OTDR monitoring WWDM.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61300-2-1, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-1: Tests – Vibration (sinusoidal)*

IEC 61300-2-4, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-4: Tests – Fibre/cable retention*

IEC 61300-2-9, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-9: Tests – Shock*

IEC 61300-2-14, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-14: Tests – High optical power*

IEC 61300-2-17, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-17: Tests – Cold*

IEC 61300-2-18, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-18: Tests – Dry heat – High temperature endurance*

IEC 61300-2-19, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-19: Tests – Damp heat (steady state)*

IEC 61300-2-22, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-22: Tests – Change of temperature*

IEC 61300-2-42, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-42: Tests – Static side load for connectors*

IEC 61300-2-44, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-44: Tests – Flexing of the strain relief of fibre optic devices*

IEC 61300-3-2, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-2: Examination and measurements – Polarization dependent loss in a single-mode fibre optic device*

IEC 61300-3-6, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-6: Examination and measurements – Return loss*

IEC 61300-3-7, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-7: Examination and measurements – Wavelength dependence of attenuation and return loss of single mode components*

IEC 61300-3-20, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-20: Examination and measurements – Directivity of fibre optic branching devices*

IEC 61753-1:2007, *Fibre optic interconnecting devices and passive components performance standard – Part 1: General and guidance for performance*

3 Terms and definitions

For the purposes of this document, the following terms and definitions, as well as those given in IEC 62074-1, apply.

3.1

OTDR monitoring WWDM device

WWDM device for monitoring PON using an OTDR that has three ports

Note 1 to entry: Signal wavelengths are transmitted between the common port and the optical line terminal (OLT) port. OTDR wavelengths are transmitted between the common port and the OTDR port

Note 2 to entry: Annex B of this standard provides information concerning the function of the OTDR monitoring WWDM device.

4 Test

Unless otherwise specified, all test methods are in accordance with the IEC 61300 series. Each test defines the number of samples to be evaluated. The samples used for each test are intended to be previously unstressed new samples but may also be selected from previously used samples if desired. The samples shall have pigtails of single-mode fibres as per IEC 60793-2-50, category B 1.1, B 1.3 or B 6 in either coated fibres (primary and secondary) or reinforced cable format. All measurements shall be carried out at standard atmosphere condition defined in IEC 61300-1, unless otherwise stated.

All tests shall be carried out over the signal wavelength ranges of 1 260 nm to 1 360 nm, 1 480 nm to 1 500 nm, 1 550 nm to 1 560 nm, and over the OTDR wavelength range, 1 620 nm to 1 630 nm or 1 645 nm to 1 655 nm, unless otherwise specified.

NOTE 1 310 nm, 1 490 nm and 1 550 nm are the nominal or centre wavelengths, stated for the ranges 1 260 nm to 1 360 nm, 1 480 nm to 1 500 nm and 1 550 nm to 1 560 nm as defined in ITU-T Recommendations G.983.3 [1]¹ and G.984.2 [2] and IEEE standard 802.3ah-2004 [3].

¹ References in square brackets refer to the Bibliography.

5 Test report

Fully documented test reports and supporting evidence shall be prepared and be available for inspection as evidence that the tests have been carried out and complied with.

6 Performance requirements

6.1 Reference components

The testing for these components does not require the use of reference components.

6.2 Dimensions

Dimensions shall comply with those given in appropriate manufacturers' drawings.

6.3 Sample size

Sample sizes for the tests are defined in Annex A.

6.4 Test details and requirements

Table 1 – Test details and requirements (1 of 5)

No.	Test	Requirement	Details	
1	Insertion loss (attenuation) IEC 61300-3-7	$\leq 0,8$ dB Insertion loss shall be met between common port and OLT port for the signal wavelength range and between common port and OTDR port for the OTDR wavelength range	Launch patchcord length: Source: Launch conditions: Measurement uncertainty:	≥ 2 m Unpolarized. The wavelength of the source shall be longer than cut-off wavelength of the fibre. Test results shall be obtained under measurement uncertainty of $\pm 0,1$ dB
2	Wavelength Isolation IEC 61300-3-7	≥ 20 dB Wavelength isolation shall be met between common port and OLT port for the OTDR wavelength range and between common port and OTDR port for the signal wavelength range	Launch patchcord length: Source: Launch conditions: Measurement uncertainty:	≥ 2 m Unpolarized. The wavelength of the source shall be longer than cut-off wavelength of the fibre. Test results shall be obtained under measurement uncertainty of ± 1 dB
3	Directivity IEC 61300-3-20	≥ 50 dB Grade U between OLT port and OTDR port. Directivity shall be met over the specified wavelength ranges.	Source type: Measurement uncertainty: Other requirements:	Laser diode (LD) Test results shall be obtained under measurement uncertainty of ± 1 dB All ports not under test shall be terminated to avoid unwanted reflections contributing to the measurement

Table 1 (2 of 5)

No.	Test	Requirement	Details	
4	Return loss IEC 61300-3-6	≥ 50 dB Grade U Return loss shall be met over the specified wavelength ranges	Source type: Measurement uncertainty: Other requirements:	Laser diode (LD) Test results shall be obtained under measurement uncertainty of ± 1 dB. All ports not under test shall be terminated to avoid unwanted reflections contributing to the measurement
5	Polarization dependent loss (PDL) IEC 61300-3-2	≤ 0,2 dB Polarization dependent loss shall be met over the specified wavelength ranges	Launch patchcord length: Source type: Measurement uncertainty:	≥ 2 m Laser diode (LD) Test results shall be obtained under measurement uncertainty of ± 0,05 dB
6	High optical power IEC 61300-2-14	≥ 300 mW (max. power at the single wavelength on the wavelength ranges, at the same time). During and on completion of the test the insertion loss limits of test No. 1 shall be met. After the test the wavelength isolation limits of test No. 2 shall be met. During and on completion of the test the return loss limits of test No. 4 shall be met	Source type: Max. power to be applied at wavelength 1 550 nm and wavelength range 1 620 nm to 1630 nm (1 650 nm to 1 660 nm): Max. power to be applied at wavelength 1 490 nm and 1 310 nm: Temperature:	Laser diode (LD) 300 mW (+ ~25 dBm) 10 mW (+ 10 dBm) 60 °C ± 2 °C Test results shall be obtained under insertion loss measurement uncertainty of ± 0,1 dB. Test results shall be obtained under return loss measurement uncertainty of ± 1 dB
7	Cold IEC 61300-2-17	After the test the insertion loss limits of test No. 1 shall be met. In addition the insertion loss during the test shall be within ± 0,3 dB from the initial value. After the test the wavelength isolation limits of test No. 2 shall be met. During and on completion of the test the return loss limits of test No. 4 shall be met	Temperature: Duration of the exposure: Maximum sampling interval during the test: Measurements required:	- 10 °C ± 2 °C 96 h 1 h Insertion loss shall be measured before, during and after the test. Return loss shall be measured before, during and after the test