

INTERNATIONAL  
STANDARD

**ISO**  
**10371**

First edition  
1993-12-01

---

---

**Reinforcement materials — Braided  
tapes — Basis for a specification**

*Produits de renfort — Rubans tressés — Base de spécification*

<https://standards.iteh.ai>  
Document Preview

ISO 10371:1993

<https://standards.iteh.ai/catalog/standards/iso/fd5b84e1-77bd-45de-a35b-cdc468311cf8/iso-10371-1993>



Reference number  
ISO 10371:1993(E)

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 10371 was prepared by Technical Committee ISO/TC 61, *Plastics*, Sub-Committee SC 13, *Composites and reinforcement fibres*.

<https://standards.iteh.ai>

<https://standards.iteh.ai/catalog/standards/iso/fd5b84e1-77bd-45de-a35b-cdc468311cf8/iso-10371-1993>

© ISO 1993

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

# Reinforcement materials — Braided tapes — Basis for a specification

## 1 Scope

This International Standard provides a basis for specifications applicable to braided tapes used as reinforcements in plastics. It deals with tapes braided from all types of yarn or roving.

## 2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 139:1973, *Textiles — Standard atmospheres for conditioning and testing*.

ISO 291:1977, *Plastics — Standard atmospheres for conditioning and testing*.

ISO 1886:1990, *Reinforcement fibres — Sampling plans applicable to received batches*.

ISO 1887:1980, *Textile glass — Determination of combustible matter content*.

ISO 1889:1987, *Textile glass — Continuous filament yarns, staple fibre yarns, textured yarns and rovings (packages) — Determination of linear density*.

ISO 2797:1986, *Textile glass — Rovings — Basis for a specification*.

ISO 3598:1986, *Textile glass — Yarns — Basis for a specification*.

ISO 4603:1993, *Textile glass — Woven fabrics — Determination of thickness*.

ISO 10120:1991, *Carbon fibre — Determination of linear density*.

## 3 Definitions

For the purposes of this International Standard, the following definitions apply.

**3.1 braided tape:** A tape made by interlacing (braiding or plaiting) three or more yarns or rovings in such a way that they cross one another and are laid together in diagonal formation.

**3.2 braiding:** A method of interlacing yarns or rovings.

**3.3 construction:** The type, machine-setting and number of yarns or rovings per carrier.

**3.4 carrier:** The braiding-machine part on which the yarns or rovings are wound.

**3.5 braid angle:** The angle between the longitudinal axis of a braid and the direction of the yarn or roving.

## 4 Description and designation

### 4.1 Technical description of braided tapes

The complete description of a braided tape requires definition of the following points:

- the designation of the braid yarn(s);
- the construction of the braided tape;
- the braid angle at a specific length;
- the type of treatment;
- the mass per unit length of the tape.

As the full description is unwieldy, the manufacturers of tapes normally give a code-number to their products to simplify ordering and stocking. The full description of the tape shall, however, be given in the manufacturer's catalogue against its code-number.

Thus this technical description is not meant for use in the designation of tapes, but is intended to be used as an aid in the preparation of standardized descriptions in the tape catalogues and to ensure consistency of tape identification.

## 4.2 Designation

The designation shall be made up of the following four groups of code-letters/numbers.

- a) The first group (maximum of four characters) indicates the fibre type or types used in the braiding.

The following code-letters shall be used to designate different fibre types:

- G = Glass fibre
- C = Carbon fibre
- A = Aramid fibre
- E = Ceramic fibre
- V = Any other fibre

If two or more fibre types are combined in a hybrid braiding, two or more code-letters shall be used:


### EXAMPLES

- CG = Carbon/glass
- CAE = Carbon/aramid/ceramic
- CGEA = Carbon/glass/ceramic/aramid

NOTE 1 If several fibre types are used, they shall be given in order of the cross-sectional area (i.e. the mass per unit length divided by the density) of the fibre concerned, starting with the fibre having the greatest cross-sectional area.

- b) The second group (three digits) indicates the width, in millimetres, of the braided tape.
- c) The third group (three digits) indicates the mass, in grams, per metre length of tape.
- d) The fourth group (two digits) indicates the braid angle, in degrees, at the width defined in the second group.

## EXAMPLE

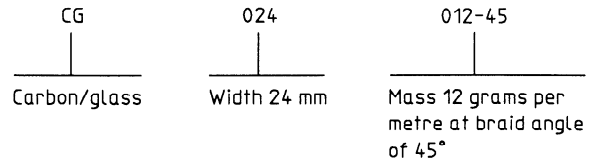

Tape width, mass per metre length and braid angle may be determined by the method specified in 7.2.

## 5 Characteristics

### 5.1 General

The braided tape shall be of uniform structure.

### 5.2 Characteristics to be specified

#### 5.2.1 Type and construction

5.2.1.1 The type of braiding yarn or roving shall be in accordance with ISO 2797 and/or ISO 3598 (for glass fibres only).

5.2.1.2 The construction of the braided tape shall be specified by

- a) the type(s) of yarn used on each carrier;
- b) the linear density, in tex or decitex, of the braid yarns in accordance with ISO 1889 or ISO 10120;
- c) the number of carriers;
- d) the type of braid:
  - 1) standard or regular braid: one carrier passes alternately under and over, or inside and outside, two other carriers,
  - 2) two-by-two or paired braid: the carriers run in pairs, each pair passing alternately under and over every other pair, revolving in the opposite direction;
- e) the braid angle at a specific width;
- f) the mass per metre length of the tape at that width.

5.2.1.3 A roll or spool of tape shall be assumed to be one length, unless otherwise stated.

5.2.1.4 The nominal thickness shall be subject to agreement between supplier and buyer. It shall be given in millimetres.