



SLOVENSKI STANDARD
SIST ISO/TR 10495:1998
01-avgust-1998

Valjasti zobniki - Dimenzioniranje na življenjsko dobo pri spremenljivih obremenitvah, skladno s standardom ISO 6336

Cylindrical gears -- Calculation of service life under variable loads -- Conditions for cylindrical gears according to ISO 6336

iTeh STANDARD PREVIEW

Engrenages cylindriques -- Calcul de la durée de vie en service sous charge variable -- Conditions pour les engrenages cylindriques conformément à l'ISO 6336

Ta slovenski standard je istoveten z: ISO/TR 10495:1997

ICS:

21.200 Gonila Gears

SIST ISO/TR 10495:1998 **en**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO/TR 10495:1998](https://standards.iteh.ai/catalog/standards/sist/93e3687e-c6b7-48da-891a-d42cf7d6a1b3/sist-iso-tr-10495-1998)

<https://standards.iteh.ai/catalog/standards/sist/93e3687e-c6b7-48da-891a-d42cf7d6a1b3/sist-iso-tr-10495-1998>

TECHNICAL REPORT

ISO/TR 10495

First edition
1997-09-01

Cylindrical gears — Calculation of service life under variable load — Conditions for cylindrical gears in accordance with ISO 6336

Engrenages cylindriques — Calcul de la durée de vie en service sous charge variable — Conditions pour les engrenages cylindriques conformément à l'ISO 6336
(standards.iteh.ai)

[SIST ISO/TR 10495:1998](https://standards.iteh.ai/catalog/standards/sist/93e3687e-c6b7-48da-891a-d42cf7d6a1b3/sist-iso-tr-10495-1998)

<https://standards.iteh.ai/catalog/standards/sist/93e3687e-c6b7-48da-891a-d42cf7d6a1b3/sist-iso-tr-10495-1998>



Reference number
ISO/TR 10495:1997(E)

ISO/TR 10495:1997(E)

Contents

	Page
1 Scope	1
2 Normative references	1
3 Definitions, symbols, quantities and units	1
4 Introduction	3
5 General calculation of service life, Method I	7
6 Calculation of service strength on the basis of single-stage strength; calculation according to ISO 6336, Method II	7
7 Random reverse torques	9
8 Reference values for application factor, K_A	10

Annexes

A Guide values for the application factor, K_A	11
B Bibliography	14

iTech STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO/TR 10495:1998
<https://standards.iteh.ai/catalog/standards/sist/93e3687e-c6b7-48da-891a-d42cf7d6a1b3/sist-iso-tr-10495-1998>

© ISO 1997

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet central@iso.ch
X.400 c=ch; a=400net; p=iso; o=isos; s=central

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The main task of technical committees is to prepare International Standards, but in exceptional circumstances a technical committee may propose the publication of a Technical Report of one of the following types:

- iTeh STANDARD PREVIEW**
(standards.itih.ai)
- type 1, when the required support cannot be obtained for the publication of an International Standard, despite repeated efforts;
 - type 2, when the subject is still under technical development or where for any other reason there is the future but not immediate possibility of an agreement on an International Standard;
 - type 3, when a technical committee has collected data of a different kind from that which is normally published as an International Standard (“state of the art”, for example).

Technical Reports of types 1 and 2 are subject to review within three years of publication, to decide whether they can be transformed into International Standards. Technical Reports of type 3 do not necessarily have to be reviewed until data they provide are considered to be no longer valid or useful.

ISO/TR 10495, which is a Technical Report of type 2, was prepared by Technical Committee ISO/TC 60, *Gears*, Subcommittee SC 2, *Gear capacity calculation*.

Annexes A and B of this Technical Report are for information only.

iTeh STANDARD PREVIEW
This page intentionally left blank
(standards.iteh.ai)

SIST ISO/TR 10495:1998

<https://standards.iteh.ai/catalog/standards/sist/93e3687e-c6b7-48da-891a-d42cf7d6a1b3/sist-iso-tr-10495-1998>

Cylindrical gears — Calculation of service life under variable load — Conditions for cylindrical gears in accordance with ISO 6336

1 Scope

This Technical Report is concerned with the calculation of service life (or safety factors for a required life) of gears subject to variable loading. Clauses 4 and 5 give a general discussion of the subject; clauses 6 to 8 present a method which may be conveniently applied at the design stage. Whilst the method is presented in terms of ISO 6336, it is equally applicable to other gear stress calculations (e.g BS 436, DIN 3990, NF E23-015).

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this Technical Report. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this Technical Report are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 701:1976, *International gear rotation - Symbols for geometrical data.*

ISO 1122-1: 1983, *Glossary of gear terms - Part 1: Geometrical definitions.*

ISO 6336-1: 1996, *Calculation of load capacity of spur and helical gears - Part 1: Basic principles, introduction and general influence factors.*

ISO 6336-2: 1996, *Calculation of load capacity of spur and helical gears - Part 2: Calculation of surface durability (pitting).*

ISO 6336-3: 1996, *Calculation of load capacity of spur and helical gears - Part 3: Calculation of tooth bending strength.*

ISO 6336-5: 1996, *Calculation of load capacity of spur and helical gears - Part 5: Strength and quality of material.*

3 Definitions, symbols, quantities and units

For the purposes of ISO TR 10495, the definitions given in ISO 1122-1 apply. Symbols are based on those given in ISO 701. Only symbols for quantities used in ISO TR 10495 are given in table 1.

Table 1 - Symbols used within ISO TR 10495

Symbol	Quantity	Unit
b	Facewidth	mm
d_1	Reference diameter of pinion	mm
e	Inclination of S-N curve	--
i	Class	--
l	Class interval	--
K_A	Application factor	--
$K_{F\alpha}$	Transverse load distribution factor (bending stress)	--
$K_{F\beta}$	Face load distribution factor (bending stress)	--
$K_{H\alpha}$	Transverse load distribution factor (contact stress)	--
$K_{H\beta}$	Face load distribution factor (contact stress)	--
K_V	Dynamic factor	--
m_n	Normal module	mm
n_i	Number of cycles at i th stress level (number of counts in class i)	--
n_l	Number of cycles at class interval level l	--
N_l	Number of cycles to failure at class interval level l	--
N_L	Number of cycles to failure	--
S	Safety factor for stress	--
$S_{F \text{ lim}}$	Safety factor for bending stress (min.)	--
$S_{H \text{ lim}}$	Safety factor for contact stress (min.)	--
T_i	Torque class	Nm
T_l	Pinion torque at top of class interval	Nm
u	Gear ratio	--
U	Miner sum	--
U_l	Individual damage part of class interval	--
Y_F	Tooth form factor	--
Y_{NT}	Tooth root stress life factor for standard test conditions	--
$Y_{R \text{ rel T}}$	Relative surface condition factor (root)	--
Y_S	Stress correction factor	--
Y_{ST}	Stress correction factor for the dimension of the standard test gears	--
Y_X	Size factor (bending stress)	--
Y_β	Helix angle factor (bending stress)	--
$Y_{\delta \text{ rel T}}$	Relative notch sensitivity factor	--
$Z_{B,D}$	Single pair tooth contact factor for pinion or gear	--
Z_E	Elasticity factor	$(\text{N/mm}^2)^{1/2}$
Z_H	Zone factor	--
Z_L	Lubricant influence factor	--
Z_{NT}	Contact stress life factor for standard test conditions	--
Z_R	Roughness factor	--
Z_V	Speed factor	--
Z_W	Hardness ratio factor	--
Z_β	Helix angle factor (contact stress)	--
Z_c	Contact ratio factor (contact stress)	--
$\sigma_{F \text{ lim}}$	Nominal stress number (bending)	N/mm^2
σ_{Fl}	Tooth root stress at class interval l	N/mm^2
σ_{FP}	Permissible tooth root stress	N/mm^2
$\sigma_{H \text{ lim}}$	Allowable stress number (contact)	N/mm^2
σ_{Hl}	Contact stress at class interval l	N/mm^2
σ_{HO}	Nominal contact stress	N/mm^2
σ_{HP}	Permissible contact stress	N/mm^2
σ_l	Stress at class interval l	N/mm^2
σ_{lim}	Allowable stress	N/mm^2
σ_p	Permissible stress	N/mm^2

4 Introduction

4.1 Determination of load and stress spectra

Variable loads resulting from a working process, starting process or from operation at or near a critical speed will cause varying stresses at the gear teeth of a drive system. The magnitude and frequency of these loads depend upon the driven machine(s), the driver(s) or motor(s) and the mass elastic properties of the system.

These variable loads (stresses) may be determined by one or more of the procedures listed below:

- Experimental measurement of the operating loads at the machine in question;
- Estimation of the spectrum, if this is known, for a similar machine with similar operating mode;
- Calculation, using known external excitation and a mass elastic simulation of the drive system.

NOTE – Specific data, relevant for the method by which the load or torque measurements are performed, should be marked at the registered results.

To obtain the spectra, the range of the measured (evaluated) loads is divided into classes. A widely used number of classes is 64.

The cycle count for the load class corresponding to the load value for the highest loaded tooth is incremented at every load repetition. Table 2 shows as an example how to apply the torque classes defined in figure 1 to specific torque levels and correlated numbers of cycles.

Table 2 – Example (see figure 1): Classes 111 & 112

Torque class, T_i , Nm	Number of cycles, n_i
$440 \leq T_{111} < 444$	$n_{111} = 2338$
$444 \leq T_{112} < 448$	$n_{112} = 4318$

The torques used to evaluate tooth loading should include the dynamic effects at different rotational speeds.

This spectrum is only valid for the measured or evaluated time period. If the spectrum is extrapolated to represent the required life time, the possibility that there might be torque peaks not frequent enough to be evaluated in that measured spectrum must be considered. These peaks may have an effect on the gear life.

Stress spectra concerning bending and pitting can be obtained from the load (torque) spectrum by using Method II.

Scuffing resistance must be calculated from the worst combination of speed and load.

Wear is a continuous deterioration of the tooth flank and must be considered separately.

Tooth root stress can also be measured by means of strain gages in the fillet. In this case, the derating factors should be taken into account using the results of the measurements. The relevant contact stress can be calculated from the measurements.

4.2 General calculation of service life

The calculated service life is based on the theory that every load cycle (every revolution) is damaging to the gear. The amount of damage depends on the stress level and can be considered as zero for lower stress levels.

The calculated bending or pitting strength fatigue life of a gear is a measure of its ability to accumulate discrete damage until failure occurs.

The fatigue life calculation needs:

- The stress spectrum;
- Material fatigue properties;
- A damage accumulation method.


T_l in Nm	[+0...+4[[+4...+8[[+8...+12[[+12...+16[[+16...+20[[+20...+24[
0,00	0	0	0	0	0	0
24,00	0	0	0	0	0	0
48,00	0	0	0	0	0	0
72,00	0	0	0	0	0	0
96,00	0	0	0	0	0	0
120,00	0	706	3469	3081	5109	32
144,00	1	2	438	381	756	903
168,00	2	0	0	0	0	1
192,00	45	350	212	616	16	0
216,00	0	0	0	0	0	0
240,00	0	0	0	0	0	0
264,00	0	0	0	0	19	2108
288,00	2072	3933	4257	6	2	3
312,00	0	0	0	0	0	0
336,00	0	0	0	0	0	0
360,00	0	0	0	0	0	0
384,00	0	0	0	0	0	0
408,00	0	0	0	0	0	0
432,00	26	72	2338*	4318*	3665	1824
456,00	239	477	2553	3216	5576	2109
480,00	932	90	420	1913	2877	2891
504,00	1255	449	67	791	745	2166
528,00	651	518	23	1	0	0
552,00	0	0	8	24	127	520
576,00	751	713	295	42	0	0
600,00	0	0	0	0	0	0
624,00	0	0	0	0	0	3
648,00	218	187	329	469	34	0
672,00	0	0	0	0	0	0
696,00	0	0	0	0	0	0
720,00	0	0	0	0	0	0
744,00	0	0	0	0	0	0
768,00	0	0	0	0	0	0
792,00	0	0	0	0	0	0
816,00	0	0	0	0	0	0
840,00	0	0	0	0	0	0
864,00	0	0	0	0	0	0
888,00	0	0	0	0	0	0
912,00	0	0	0	0	0	0
936,00	0	0	0	0	0	0
960,00	0	0	0	0	0	0
984,00	0	0	0	0	0	0
1008,00	0	0	0	0	0	0
* example presented in table 2						

Figure 1 – Torque spectrum (class number = 258)

The stress spectrum is discussed in clause 6.1.

Strength values based on material fatigue properties are chosen from applicable S-N curves. Many specimens must be tested by stressing them repeatedly at one stress level until failure occurs. This gives, after a statistical interpretation for a specific probability, a failure cycle number characteristic of this stress level. Repeating the procedure at different stress levels leads to an S-N curve.

An example of a cumulative stress spectrum is given in figure 2. Figure 3 shows measured cumulative stress spectra for tooth root stress. Figure 4 shows a cumulative contact stress spectrum with an S-N curve for specific material fatigue properties.

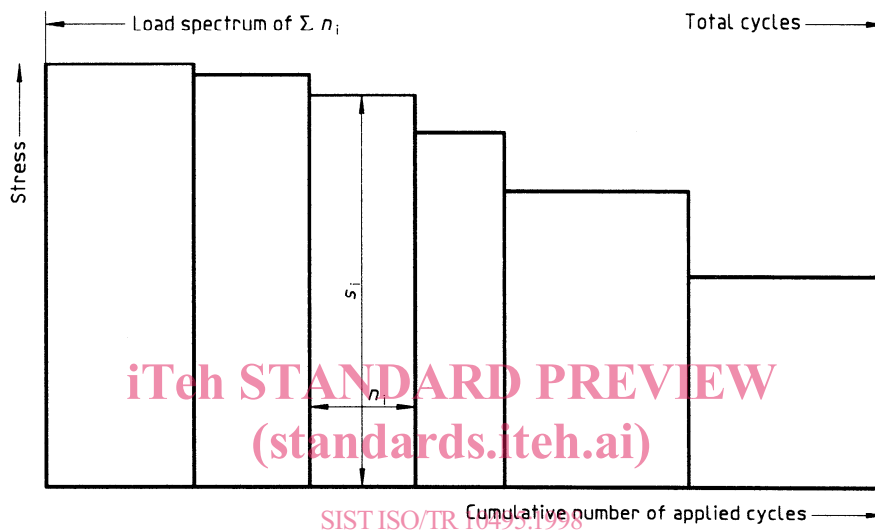

<https://standards.iteh.ai/catalog/standards/sist/93e3687e-c6b7-48da-891a-d42cf7d6a163/sist-iso-tr-10495-1998>
Figure 2 – Example for a cumulative stress spectrum

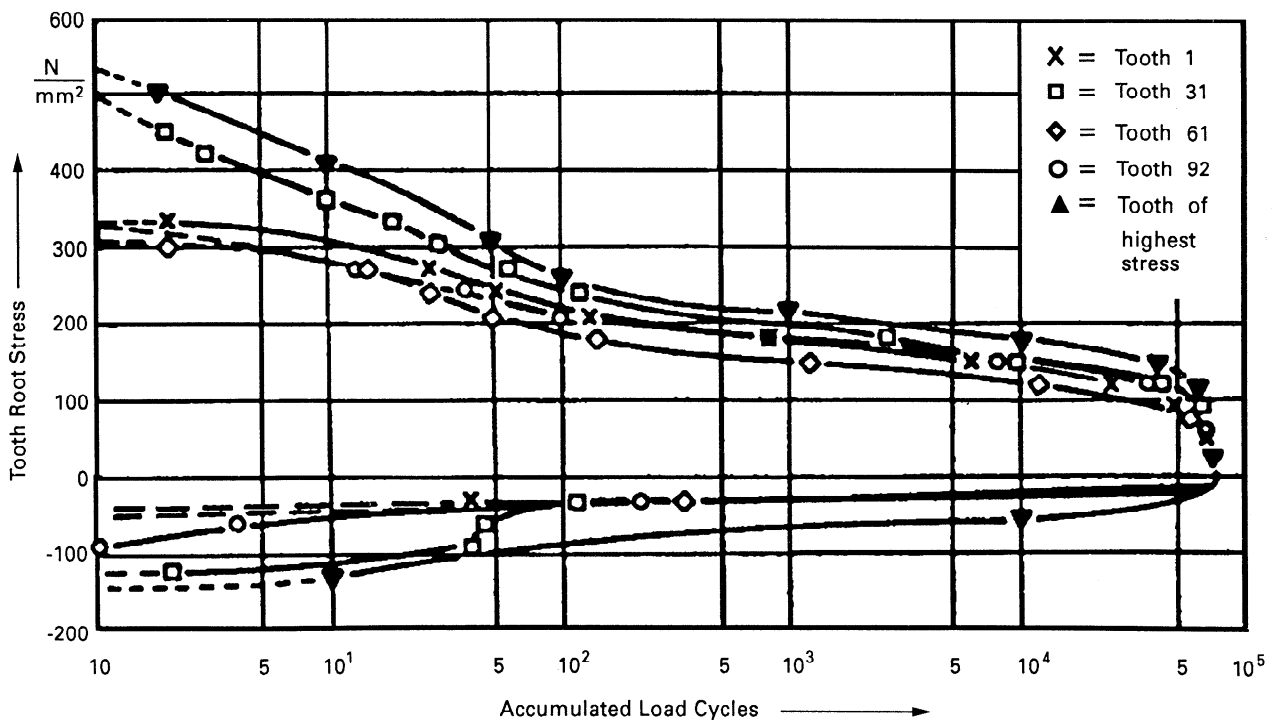


Figure 3 - Measured cumulative tooth root stress spectra for different teeth of one wheel