

---

---

**Prevailing torque type hexagon thin nuts  
(with non-metallic insert)**

*Écrous hexagonaux bas autofreinés (à anneau non métallique)*

**iTeh STANDARD PREVIEW  
(standards.iteh.ai)**

ISO 10511:1997

<https://standards.iteh.ai/catalog/standards/sist/3b645561-2e63-4abf-8cf9-825cb2a8aa8e/iso-10511-1997>



## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 10511 was prepared by Technical Committee ISO/TC 2, *Fasteners*, Subcommittee SC 1, *Mechanical properties of fasteners*.

Annex A of this International Standard is for information only.

iTeh STANDARD PREVIEW

(Standards.jtcn.com)

ISO 10511:1997

Standard is for information only. <https://standards.iso.org/iso-10511-1997>

© ISO 1997

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
Case postale 56 • CH-1211 Genève 20 • Switzerland  
Internet central@iso.ch  
X.400 c=ch; a=400net; p=iso; o=isocs; s=central

Printed in Switzerland

# Prevailing torque type hexagon thin nuts (with non-metallic insert)

## 1 Scope

This International Standard specifies the characteristics of prevailing torque type hexagon thin nuts (with non-metallic insert) with thread from M3 up to and including M36, in product grade A for threads up to and including M16 and product grade B for threads above M16, and with property classes 04 and 05.

NOTE — The dimensions of the nuts correspond to those given in ISO 4035 plus prevailing torque feature.

If other specifications are required, they should be selected from existing International Standards, for example ISO 261, ISO 965-2, ISO 2320 and ISO 4759-1.

## 2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 225:1983, *Fasteners – Bolts, screws, studs and nuts – Symbols and designations of dimensions*.

ISO 261:–<sup>1)</sup>, *ISO general purpose metric screw threads – General plan*.

ISO 965-2:–<sup>2)</sup>, *ISO general purpose metric screw threads – Tolerances – Part 2: Limits of sizes for general purpose bolt and nut threads – Medium quality*.

ISO 2320:1997, *Prevailing torque type steel hexagon nuts – Mechanical and performance properties*.

ISO 3269:1988, *Fasteners – Acceptance inspection*.

ISO 4042:–<sup>3)</sup>, *Fasteners – Electroplated coatings*.

ISO 4759-1:–<sup>4)</sup>, *Tolerances for fasteners – Part 1: Bolts, screws, studs and nuts – Product grades A, B and C*.

ISO 6157-2:1995, *Fasteners – Surface discontinuities – Part 2: Nuts*.

ISO 8992:1986, *Fasteners – General requirements for bolts, screws and nuts*.

1) To be published. (Revision of ISO 261:1973)

2) To be published. (Revision of ISO 965-2:1980)


3) To be published. (Revision of ISO 4042:1989)

4) To be published. (Revision of ISO 4759-1:1978)

3 Dimensions

See figure 1 and table 1.

Symbols and designations of dimensions are specified in ISO 225.

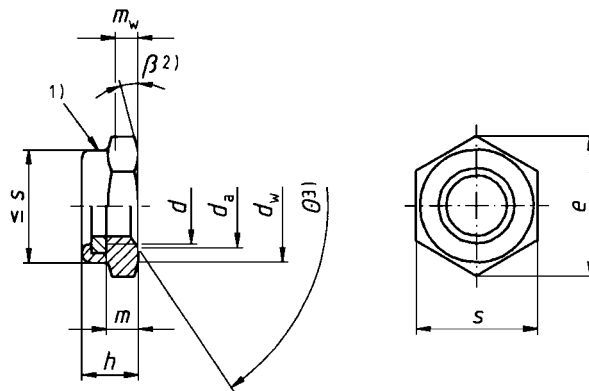

- 1) Prevailing torque element, shape optional
- 2)  $\beta = 15^\circ$  to  $30^\circ$
- 3)  $\theta = 90^\circ$  to  $120^\circ$

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

Figure 1  
Table 1 — Dimensions

<https://standards.iteh.ai/catalog/standards/sist/3b645561-2e63-4abf-8cf9-825cb2a8aa8e/iso-10511-1997>

Dimensions in millimetres

Thread, (d)		M3	M4	M5	M6	M8	M10	M12	(M14) <sup>1)</sup>	M16	M20	M24	M30	M36
$P^{2)}$	min.	0,5	0,7	0,8	1	1,25	1,5	1,75	2	2	2,5	3	3,5	4
$d_a$	max.	3,45	4,6	5,75	6,75	8,75	10,8	13	15,1	17,3	21,6	25,9	32,4	38,9
	min.	3,00	4,0	5,00	6,00	8,00	10,0	12	14,0	16,0	20,0	24,0	30,0	36,0
$d_w$	min.	4,6	5,9	6,9	8,9	11,6	14,6	16,6	19,6	22,5	27,7	33,2	42,8	51,1
$e$	min.	6,01	7,66	8,79	11,05	14,38	17,77	20,03	23,35	26,75	32,95	39,55	50,85	60,79
	max.	3,90	5,00	5,00	6,00	6,76	8,56	10,23	11,32	12,42	14,9	17,8	22,2	25,5
$h$	min.	3,42	4,52	4,52	5,52	6,18	7,98	9,53	10,22	11,32	13,1	16,0	20,1	23,4
	max.	3,90	5,00	5,00	6,00	6,76	8,56	10,23	11,32	12,42	14,9	17,8	22,2	25,5
$m^{3)}$	min.	1,55	1,95	2,45	2,9	3,7	4,7	5,7	6,42	7,42	9,1	10,9	13,9	16,9
$m_w^{4)}$	min.	1,24	1,56	1,96	2,32	2,96	3,76	4,56	5,14	5,94	7,28	8,72	11,12	13,52
$s$	max.	5,50	7,00	8,00	10,00	13,00	16,00	18,00	21,00	24,00	30,00	36	46	55,0
	min.	5,32	6,78	7,78	9,78	12,73	15,73	17,73	20,67	23,67	29,16	35	45	53,8

- 1) The size in brackets should be avoided if possible.
- 2)  $P$  is the pitch of the thread.
- 3) Minimum thread height.
- 4) Minimum wrenching height.

## 4 Requirements and reference International Standards

See table 2

Table 2 — Requirements and reference International Standards

Material	Nut body	Steel
	Insert	For example, polyamid
General requirements	International Standard	ISO 8992
Thread	Tolerance	6H
	International Standards	ISO 261, ISO 965-2
Mechanical and performance properties	Property class	04, 05
	International Standard	ISO 2320
Tolerances	Product grade	For $d \leq M16$ : A For $d > M16$ : B
	International Standard	ISO 4759-1
Finish		As processed
		Requirements for electroplated coatings are covered in ISO 4042.  If different electroplating requirements are desired or if requirements are needed for other finishes, they should be negotiated between customer and supplier.  Limits for surface discontinuities are covered in ISO 6157-2.
Acceptability		For acceptance procedure, see ISO 3269.

## 5 Designation

### EXAMPLE

A prevailing torque type hexagon thin nut, with non-metallic insert, thread M12 and property class 04 is designated as follows:

Prevailing torque type hexagon thin nut ISO 10511 – M12 – 04

**Annex A**  
(informative)

**Bibliography**

[1] ISO 4035:1986, *Hexagon thin nuts (chamfered) – Product grades A and B.*

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO 10511:1997](https://standards.iteh.ai/catalog/standards/sist/3b645561-2e63-4abf-8cf9-825cb2a8aa8e/iso-10511-1997)

<https://standards.iteh.ai/catalog/standards/sist/3b645561-2e63-4abf-8cf9-825cb2a8aa8e/iso-10511-1997>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 10511:1997

<https://standards.iteh.ai/catalog/standards/sist/3b645561-2e63-4abf-8cf9-825cb2a8aa8e/iso-10511-1997>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 10511:1997

<https://standards.iteh.ai/catalog/standards/sist/3b645561-2e63-4abf-8cf9-825cb2a8aa8e/iso-10511-1997>

---

---

**ICS 21.060.20**

**Descriptors:** fasteners, nuts (fasteners), self-locking nuts, hexagonal nuts, specifications, dimensions, designation.

Price based on 4 pages

---

---