



Designation: D 5413 – 93 (Reapproved 2002)

Standard Test Methods for Measurement of Water Levels in Open-Water Bodies¹

This standard is issued under the fixed designation D 5413; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last approval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 These test methods cover equipment and procedures used in obtaining water levels of rivers, lakes, and reservoirs or other water bodies. Three types of equipment are available as follows:

Test Method A—Nonrecording water-level measurement devices
Test Method B—Recording water-level measurement devices
Test Method C—Remote-interrogation water-level measurement devices

1.2 The procedures detailed in these test methods are widely used by those responsible for investigations of streams, lakes, reservoirs, and estuaries, for example, the U.S. Agricultural Research Service, the U.S. Army Corp of Engineers, and the U.S. Geological Survey.² The referenced ISO standard also furnishes useful information.

1.3 It is the responsibility of the user of these test methods to determine the acceptability of a specific device or procedure to meet operational requirements. Compatibility between sensors, recorders, retrieval equipment, and operational systems is necessary, and data requirements and environmental operating conditions must be considered in equipment selection.

1.4 The values stated in inch-pound units are to be regarded as the standard. The values given in parentheses are for information only.

1.5 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 ASTM Standards:

D 1129 Terminology Relating to Water³

D 1941 Test Method for Open Channel Flow Measurement of Water with the Parshall Flume³

D 2777 Practice for Determination of Precision and Bias of Applicable Methods of Committee D19 on Water³

D 5242 Test Method for Open Channel Flow Measurement of Water with Thin-Plate Weirs³

2.2 ISO Standard:

ISO 4373 Measurement of Liquid Flow in Open Channels—Water Level Measuring Devices⁴

3. Terminology

3.1 *Definitions*—For definitions of terms used in this test method, refer to Terminology D 1129.

3.2 Definitions of Terms Specific to This Standard:

3.2.1 *elevation*—the vertical distance from a datum to a point.

3.2.2 *datum*—a level plane that represents a zero or some defined elevation.

3.2.3 *gage*—a generic term that includes water level measuring devices.

3.2.4 *gage datum*—a datum whose surface is at the zero elevation of all the gages at a gaging station; this datum is often at a known elevation referenced to National Geodetic Vertical Datum of 1929 (NGVD).

3.2.5 *gage height*—the height of a water surface above an established or arbitrary datum at a particular gaging station; also termed stage.

3.2.6 *gaging station*—a particular site on a stream, canal, lake, or reservoir where systematic observations of hydrologic data are obtained.

3.2.7 *National Geodetic Vertical Datum of 1929 (NGVD)*—prior to 1973 known as mean sea level datum; a spheroidal datum in the conterminous United States and Canada that approximates mean sea level but does not necessarily agree with sea level at a specific location.

4. Significance and Use

4.1 These test methods are used to determine the gage height or elevation of a river or other body of water above a given datum.

¹ These test methods are under the jurisdiction of ASTM Committee D19 on Water and is the direct responsibility of Subcommittee D19.07 on Sediments, Geomorphology, and Open-Channel Flow.

Current edition approved May 15, 1993. Published November 1993.

² Buchanan, T. J., and Somers, W. P., "Stage Measurement at Gaging Stations," Techniques of Water Resources Investigations, Book 3, Chapter A-7, U.S. Geological Survey, 1968.

³ *Annual Book of ASTM Standards*, Vol 11.01.

⁴ Available from American National Standards Institute, 11 W. 42nd St., 13th Floor, New York, NY, 10036.

4.2 Water level data can serve as an easily recorded parameter, and through use of a stage-discharge relation provide an indirect value of stream discharge, often at a gaging station.

4.3 These test methods can be used in conjunction with other determinations of biological, physical, or chemical properties of waters.

TEST METHOD A—NONRECORDING WATER-LEVEL MEASUREMENT DEVICES

5. Summary of Test Method

5.1 This test method is usually applicable to conditions where continuous records of water level or discharge are not required. However, in some situations, daily or twice daily observations from a nonrecording water-level device can provide a satisfactory record of daily water levels or discharge. Water levels obtained by the nonrecording devices described in this test method can be used to calibrate recording water-level devices described in Test Methods B and C.

5.2 Devices included in this test method are of two general types: those that are read directly, such as a staff gage; and those that are read by measurement to the water surface from a fixed point, such as wire-weight, float-tape, electric-tape, point and hook gages.

5.2.1 Staff, wire-weight, and chain gages are commonly used as both outside auxiliary and reference gages. Vertical and inclined-staff, float-tape, electric-tape, hook and point gages are commonly used as inside auxiliary and reference gages.

5.3 Documentation of observations must be manually recorded.

6. Apparatus

6.1 *Staff Gages:*

6.1.1 *Vertical Staff Gages*—Staff gages are usually graduated porcelain-enameled plates attached to wooden piers or pilings, bridge piers, or other hydraulic structures. They may also be installed on the inside of gaging station stilling wells as inside reference gages. They are precisely graduated, usually to 0.02 ft or 2 mm, although other markings may be used for specific applications (see Fig. 1).

6.1.2 *Inclined Staff Gages*—Inclined staff gages usually consist of markings on heavy timbers, steel beams, or occasionally concrete beams built partially embedded into the natural streambed slope. Since they are essentially flush with the adjoining streambed, floating debris and ice are less likely to cause damage than for a vertical staff gage. Individual graduation and marking of the installed gages by engineering levels are required due to the variability of bank slope.

6.2 *Wire-Weight Gage*—An instrument that is mounted on a bridge or other structure above a water body. Water levels are obtained by direct measurement of the distances between the device and the water surface. A wire-weight gage consists of a drum wound with a single layer of cable, a bronze weight attached to the end of the cable, a graduated disk, a counter, and a check bar, all contained within a protective housing (see Fig. 2). The disk is graduated and is permanently connected to the counter and the shaft of the drum. The cable is guided to its position on the drum by a threading sheave. The reel is

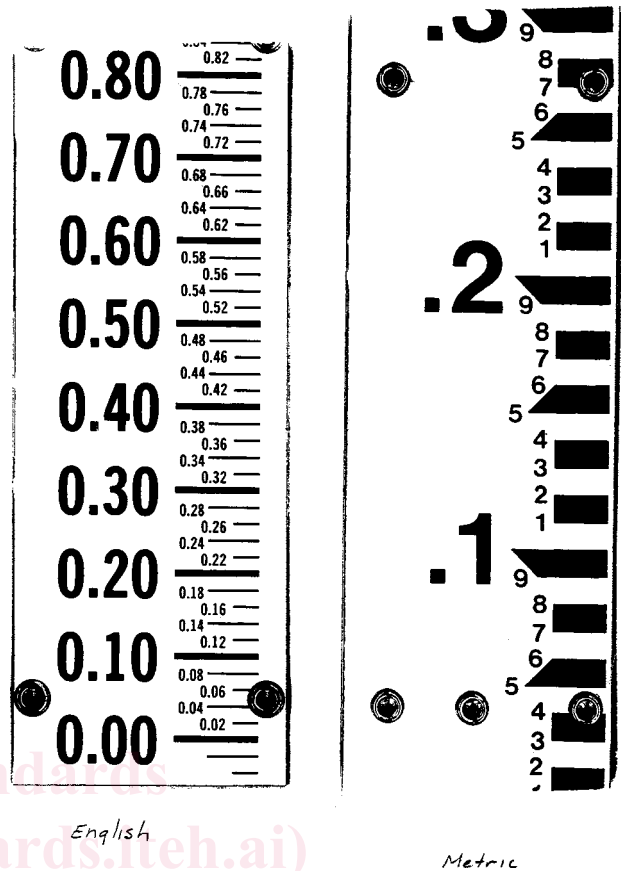


FIG. 1 Staff Gages

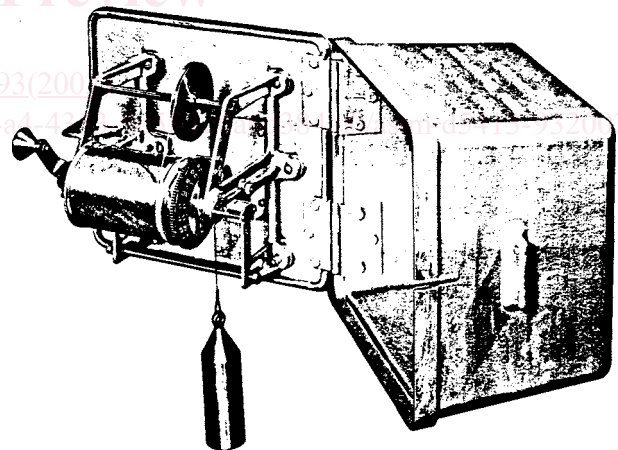


FIG. 2 Type A Wire-Weight Gage

equipped with a pawl and ratchet for holding the weight at any desired elevation. A horizontally mounted check bar is mounted at the lower edge of the instrument. Differential levels are run to the check bar. When the weight is lowered to touch the check bar, readings of the counter are compared to its known elevation as a calibration procedure. The gage is set so that when the bottom of the weight is at the water surface, the gage height is indicated by the combined readings of the counter and the graduated disk.

6.3 *Needle Gages*—Frequently referred to as point or hook gages. A needle gage consists of a vertically-mounted pointed

metallic, small-diameter rod, which can be lowered until an exact contact is made with the water surface. A vernier or graduated scale is read to indicate a gage height. A needle-type gage offers high measurement accuracy, but requires some skill and good visibility (light conditions) in lowering and raising the device to a position where the point just pierces the water surface. These gages are most commonly used in applications where the water surface is calm.

6.3.1 *Point Gage*—A form of needle gage where the tip or point approaches the water surface from above.

6.3.2 *Hook Gage*—A form of needle gage made in the shape of a hook, where the tip or point approaches the water surface from below (see Fig. 3). The hook gage is easier to use in a stilling well application. As the point contacts the water surface, overhead light will reflect from a dimple on the water surface.

6.4 *Float-Tape Gage*—Consists of a float attached to a stainless steel graduated tape that passes over a suitable pulley with a counterweight to maintain tension. A pointer or other index is frequently fabricated as an integral part of the pulley assembly (see Fig. 4). Float-tape gages frequently are combined with water-level recorders in a manner whereby the pulley is the stage drive wheel for the recorder.

6.5 *Electric-Tape Gage*—Consists of a graduated steel tape and weight attached to a combined tape reel, voltmeter, datum index and electrical circuit, powered by a 4½ to 6 volt battery (see Fig. 5). The gage frame is mounted on a shelf or bracket over the water surface, usually in a stilling well. The weight is

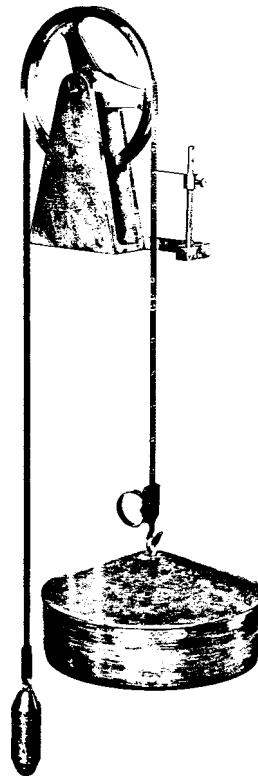


FIG. 4 Float-Type Gage

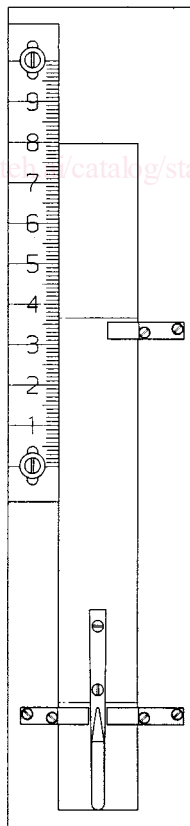


FIG. 3 Hook Gage

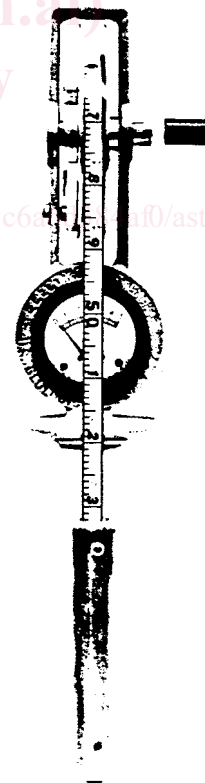


FIG. 5 Electric-Type Gage

lowered until the weight touches the water surface closing the

electrical circuit that is indicated by the voltmeter. The gage height is read on the tape at the index.

6.6 A reference point is frequently selected on a stable member of a bridge, stilling well, or other structure from which distance vertical measurements to the water surface are made by steel tape and weight. The reference point is a clearly defined location, frequently a file mark or paint mark to ensure that all readings are from the same location.

7. Calibration

7.1 Establish a datum. The datum may be a recognized datum such as National Geodetic Vertical Datum of 1929 (NGVD), a datum referenced to a recognized datum such as 580.00 ft NGVD 1929, a local datum, or an arbitrary datum. A datum is usually selected that will give readings of small positive numbers.

7.2 Establish at least three reference marks (RMs). Reference marks must be located on independent permanent structures that have a good probability of surviving a major flood or other event that may destroy the gage. Reference marks should be close enough to the water-level measuring device that the leveling circuit not require more than two or three instrument setups to complete elevation verification. If the NGVD datum is used, determine the elevation of the reference marks by differential leveling from the nearest NGVD benchmark.

7.3 Set the gages to correct datum by differential leveling from the reference marks. Use leveling procedures described in a surveying text or “Levels at Streamflow Gaging Stations.”⁵

7.4 Run levels to gages from RMs annually for the first 3 to 5 years, then if stability is evident, a level frequency of 3 to 5 years is acceptable. Rerun levels at any time that a gage has been disturbed or has unresolved gage reading inconsistencies. Run levels to all RMs, reference points, index points, and to each staff gage, and to the water surface. Read the water surface at each gage at the time levels are run. Document differences found and changes made in a permanent record.

8. Procedure

8.1 Read direct reading gages by observing the water surface on the gage scale. Manually record this value on an appropriate form.

8.2 Gages that require measurement from a fixed point to the water surface must follow procedures provided by manufacturers of the specific instrument.

8.3 Make a visual inspection of gages at each reading to detect apparent damage, which could affect accuracy.

TEST METHOD B—RECORDING WATER-LEVEL MEASUREMENT DEVICES

9. Summary of Test Method

9.1 This test method is applicable where continuous unattended records of water level or discharge are required. Procedures described in Test Method A are usually used to set these recording devices to the correct datum.

9.2 Devices, generically referred to as water-level recorders, or recorders, included in this test method must be capable of recording stage and the time and date at which the stage occurred.

9.3 Recorders may sense water level by direct mechanical connection, usually by float-counterweight and tape or cable, by gas purge manometer systems (bubble gages), or by electronic water level sensors (pressure transducer or acoustic devices).

9.4 Recorders may retain data in graphical, analog, digital, or other format.

9.5 Recorders are available that can remain unattended for periods from one week to longer than six months.

10. Apparatus

10.1 *Types of Sensing Systems:*

10.1.1 *Direct Reading Systems:*

10.1.1.1 *Crest Stage Gage*—A crest stage gage is a simple sensing-recording device that is installed near a water body to record the highest water level that occurs between visits of field personnel. A wooden rod is encased in a steel or plastic pipe with holes for water to enter and rise to the outside water level. A recoverable high-water mark is left on the device by particles of ground cork that float to the highest water level (Fig. 6).

10.1.1.2 *Tape Gage Maximum-Minimum Indicators*—These indicators include magnetic or mechanical accessories that record maximum or minimum travel of float-drive tape gages or recorder-drive tapes.

10.1.2 *Mechanical Sensing Systems:*

10.1.2.1 *Float Tape*—Consists of a float that floats on the water surface, usually in a stilling well, and a steel tape or cable which passes over a recorder drive pulley. A weight on the opposite end of the tape maintains tension in the tape or cable. The rise and fall of the water surface is thus directly transmitted to the recorder.

10.1.2.2 *Shaft Encoders*—These devices consist of a float-tape driven shaft and pulley assembly that converts the angular shaft position to an electronic signal compatible with electronic recorders. Analog output potentiometers and several digital format output encoding systems are available.

10.1.3 *Gas-Purge System*—This system is commonly known as a bubble gage. A gas, usually nitrogen, is fed from a supply tank and pressure regulator through a tube and bubbled freely into the water body through an orifice at a fixed location on or near the bottom of the water body. The gas pressure in the tube is equal to the piezometric head on the bubble orifice corresponding to the water level over the orifice. Several methods of sensing this line pressure and converting it to a recordable format are used (Fig. 7).

10.1.3.1 *Mercury Manometer*—The manometer assembly converts the gas purge line pressure to a shaft rotation for driving a recorder. Mercury is used because its specific gravity is 13.6 times that of water, and thus shortens the length of the manometer. The theory and application of these devices are given in “Installation and Service Manual for U.S. Geological

⁵ Kennedy, E. J., “Levels at Streamflow Gaging Stations,” Techniques of Water Resources Investigations, Book 3, Chapter A-19, U.S. Geological Survey, 1990.