

Edition 2.0 2010-08

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Industrial communication networks - Fieldbus specifications - Part 3-19: Data-link layer service definition - Type 19 elements

Réseaux de communication industriels - Spécifications des bus de terrain - Partie 3-19: Définition des services de couche liaison de données - Eléments de Type 19



THIS PUBLICATION IS COPYRIGHT PROTECTED Copyright © 2010 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office Tel.: +41 22 919 02 11 3, rue de Varembé Fax: +41 22 919 03 00

CH-1211 Geneva 20 info@iec.ch Switzerland www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...).

It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de la CEL

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Liens utiles:

Recherche de publications CEI - www.iec.ch/searchpub

La recherche avancée vous permet de trouver des publications CEI en utilisant différents critères (numéro de référence, texte, comité d'études,...).

Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

Just Published CEI - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications de la CEI. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (VEI) en ligne.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.


http



Edition 2.0 2010-08

INTERNATIONAL STANDARD

NORME INTERNATIONALE



Industrial communication networks - Fieldbus specifications - Part 3-19: Data-link layer service definition - Type 19 elements

Réseaux de communication industriels - Spécifications des bus de terrain - Partie 3-19: Définition des services de couche liaison de données - Eléments de Type 19

tps://standards.iteh.anvyales/standards/vec

INTERNATIONAL ELECTROTECHNICAL COMMISSION

COMMISSION ELECTROTECHNIQUE INTERNATIONALE

PRICE CODE
CODE PRIX

T

ICS 25.04.40; 35.100.20; 35.110

ISBN 978-2-88912-855-6

Warning! Make sure that you obtained this publication from an authorized distributor.

Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

CONTENTS

FC	REW	ORD	3			
IN	TROD	UCTION	5			
1	Scope					
	1.1	Overview	6			
	1.2	Specifications	6			
	1.3	Conformance	6			
2 Normative references						
3	Terms, definitions, symbols, abbreviations and conventions					
	3.1	Reference model terms and definitions	7			
	3.2	Service convention terms and definitions	8			
	3.3		<u>)9</u>			
	3.4		12			
	3.5		13			
4	Data-link services and concepts					
	4.1	Overview	14			
	4.2	Service channel services (SVC services)				
	4.3	Hot-plug services	18			
	4.4	Realtime channel setup services (RTCS services)	19			
	4.5	4.5 RTC services				
Bik	oliogra	aphy	25			
Fiç	gure 1	- Relationships of DLSAPs, DLSAP-addresses and group DL-addresses	11			
Та	ble 1 -	- Summary of DL services and primitives 19.2010	15			
Та	ble 2 -	Read (RD)	158-3-17			
		– Write (WR)				
Та	ble 4	- Enable_Hotplug (ENP)				
	able 5 – Notify_Hotplug (NHP)					
	able 6 Initiate_cyclic_communication (ICC)					
	ble 7 – Disable_cyclic_communication (DCC)					
	able 8 – Notify_Error (NER)21					
	able 9 – Write_cyclic (WRC)22					
	able 10 – Get_Device_Status (GDS)22					
	able 11 – Write_Device_Status (WDS)23					
		! – Notify_Network_Status_Change (NNSC)				

INTERNATIONAL ELECTROTECHNICAL COMMISSION

INDUSTRIAL COMMUNICATION NETWORKS – FIELDBUS SPECIFICATIONS –

Part 3-19: Data-link layer service definition – Type 19 elements

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and EC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

NOTE 1 Use of some of the associated protocol types is restricted by their intellectual-property-right holders. In all cases, the commitment to limited release of intellectual-property-rights made by the holders of those rights permits a particular data-link layer protocol type to be used with physical layer and application layer protocols in type combinations as specified explicitly in the profile parts. Use of the various protocol types in other combinations may require permission of their respective intellectual-property-right holders.

International Standard IEC 61158-3-19 has been prepared by subcommittee 65C: Industrial networks, of IEC technical committee 65: Industrial-process measurement, control and automation.

This second edition cancels and replaces the first edition published in 2007. This edition constitutes a technical revision.

The main changes with respect to the previous edition are listed below:

increasing the number of supported devices (511 instead of 254);

- introducing a communication version identification;
- adding a mechanism for remote address allocation;
- introducing enhanced parameter addressing (32 bit instead of 16 bit);
- · restructuring control and status word;
- improving the redundancy and hotplug features;
- improving the error handling;
- adding a multiplexing protocol (SMP: Type 19 Messaging Protocol).

This bilingual version published in 2012-01 corresponds to the English version published in 2010-08.

The text of this standard is based on the following documents:

FDIS	Report on voting
65C/604/FDIS	65C/618/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

The French version has not been voted upon.

This publication has been drafted in accordance with ISO/NEC Directives, Part 2.

A list of all parts of the IEC 61158 series, published under the general title Industrial communication networks—Fieldbus specifications, can be found on the IEC web site.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

https://standardirmed,

- withdrawn,
- replaced by a revised edition, or
- amended.

NOTE 2 The revision of this standard will be synchronized with the other parts of the IEC 61158 series.

INTRODUCTION

This part of IEC 61158 is one of a series produced to facilitate the interconnection of automation system components. It is related to other standards in the set as defined by the "three-layer" fieldbus reference model described in IEC/TR 61158-1.

Throughout the set of fieldbus standards, the term "service" refers to the abstract capability provided by one layer of the OSI Basic Reference Model to the layer immediately above. Thus, the data-link layer service defined in this standard is a conceptual architectural service, independent of administrative and implementation divisions.



INDUSTRIAL COMMUNICATION NETWORKS – FIELDBUS SPECIFICATIONS –

Part 3-19: Data-link layer service definition – Type 19 elements

1 Scope

1.1 Overview

This standard provides common elements for basic time-critical messaging communications between devices in an automation environment. The term "time-critical" is used to represent the presence of a time-window, within which one or more specified actions are required to be completed with some defined level of certainty. Failure to complete specified actions within the time window risks failure of the applications requesting the actions, with attendant risk to equipment, plant and possibly human life.

This standard defines in an abstract way the externally visible service provided by the Type 19 fieldbus data-link layer in terms of

- a) the primitive actions and events of the service;
- b) the parameters associated with each primitive action and event, and the form which they take; and
- c) the interrelationship between these actions and events, and their valid sequences.

The purpose of this standard is to define the services provided to

- the Type 19 fieldbus application layer at the boundary between the application and datalink layers of the fieldbus reference model, and
- systems management at the boundary between the data-link layer and systems management of the fieldbus reference model.

1.2 Specifications

The principal objective of this standard is to specify the characteristics of conceptual data-link layer services suitable for time-critical communications, and thus supplement the OSI Basic Reference Model in guiding the development of data-link protocols for time-critical communications. A secondary objective is to provide migration paths from previously-existing industrial communications protocols.

This standard may be used as the basis for formal DL-Programming-Interfaces. Nevertheless, it is not a formal programming interface, and any such interface will need to address implementation issues not covered by this specification, including:

- a) the sizes and octet ordering of various multi-octet service parameters, and
- b) the correlation of paired request and confirm, or indication and response, primitives.

1.3 Conformance

This standard does not specify individual implementations or products, nor do they constrain the implementations of data-link entities within industrial automation systems.

There is no conformance of equipment to this data-link layer service definition standard. Instead, conformance is achieved through implementation of the corresponding data-link protocol that fulfills the Type 19 data-link layer services defined in this standard.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 7498-1, Information technology – Open Systems Interconnection – Basic Reference Model: The Basic Model

ISO/IEC 7498-3, Information technology – Open Systems Interconnection – Basic Reference Model: Naming and addressing

ISO/IEC 10731, Information technology – Open Systems Interconnection – Basic Reference Model – Conventions for the definition of OSI services

3 Terms, definitions, symbols, abbreviations and conventions

For the purposes of this document, the following terms, definitions, symbols, abbreviations and conventions apply.

3.1 Reference model terms and definitions

This standard is based in part on the concepts developed in ISO/IEC 7498-1 and ISO/IEC 7498-3, and makes use of the following terms defined therein:

3.1.1 DL-address (https://stago.liteh.ai)	[7498-3]
3.1.2 DL-address-mapping	[7498-1]
3.1.3 called-DL-address	[7498-3]
3.1.4 calling-DL-address	[7498-3]
3.1.5 centralized multi-end-point-connection	[7498-1]
3.1.6 DL-connection	[7498-1]
3.1.7 DL-connection-end-point	[7498-1]
3.1.8 DL-connection-end-point-identifier	[7498-1]
3.1.9 DL-connection mode transmission	[7498-1]
3.1.10 DL-connectionless-mode transmission	[7498-1]
3.1.11 correspondent (N)-entities correspondent DL-entities (N=2) correspondent Ph-entities (N=1)	[7498-1]
3.1.12 DL-duplex-transmission	[7498-1]
3.1.13 (N)-entity DL-entity (N=2) Ph-entity (N=1)	[7498-1]
3.1.14 DL-facility	[7498-1]
3.1.15 flow control	[7498-1]

3.1.16	(N)-layer DL-layer (N=2) Ph-layer (N=1)	[7498-1]
3.1.17	layer-management	[7498-1]
3.1.18	DL-local-view	[7498-3]
3.1.19	DL-name	[7498-3]
3.1.20	naming-(addressing)-domain	[7498-3]
3.1.21	peer-entities	[7498-1]
3.1.22	primitive name	[7498-3]
3.1.23	DL-protocol	[7498-1]
3.1.24	DL-protocol-connection-identifier	[7498-1]
3.1.25	DL-protocol-data-unit	[7498-1]
3.1.26	DL-relay	[7498-1]
3.1.27	reset	[7498-1]
3.1.28	responding-DL-address	[7498-3]
3.1.29	routing (https://standxlas.iteh.ai)	[7498-1]
3.1.30	segmenting	[7498-1]
3.1.31	(N)-service DL-service (N=2) Ph-service (N=1)	[7498-1]
https:// 3.1.32 0	(N)-service-access-point (N=2) Ph-service-access-point (N=1)	[7498-1]19-2010
3.1.33	DL-service-access-point-address	[7498-3]
3.1.34	DL-service-connection-identifier	[7498-1]
3.1.35	DL-service-data-unit	[7498-1]
3.1.36	DL-simplex-transmission	[7498-1]
3.1.37	DL-subsystem	[7498-1]
3.1.38	systems-management	[7498-1]
3.1.39	DL-user-data	[7498-1]
3.2 S	Service convention terms and definitions	

3.2 Service convention terms and definitions

This standard also makes use of the following terms defined in ISO/IEC 10731 as they apply to the data-link layer: $\frac{1}{2}$

3.2.1 acceptor

3.2.2 asymmetrical service

- 3.2.3 confirm (primitive); requestor.deliver (primitive)
- 3.2.4 deliver (primitive)
- 3.2.5 DL-confirmed-facility
- 3.2.6 DL-facility
- 3.2.7 DL-local-view
- 3.2.8 DL-mandatory-facility
- 3.2.9 DL-non-confirmed-facility
- 3.2.10 DL-provider-initiated-facility
- 3.2.11 DL-provider-optional-facility
- 3.2.12 DL-service-primitive; primitive
- 3.2.13 DL-service-provider
- 3.2.14 DL-service-user
- 3.2.15 DL-user-optional-facility
- 3.2.16 indication (primitive); acceptor.deliver (primitive)
- 3.2.17 multi-peer
- 3.2.18 request (primitive),

requestor.submit (primitive)

- 3.2.19 requestor
- 3.2.20 response (primitive); acceptor.submit (primitive)
- 3.2.21 submit (primitive)
- 3.2.22 symmetrical service
- 3.3 Data-link service terms and definitions

3.3.1

communication cycle

fixed time period between two master synchronization telegrams in which real-time telegrams are transmitted in the RT channel and non real-time telegrams are transmitted in the IP channel

3.3.2

cycle time

duration of a communication cycle

3.3.3

cyclic communication

periodic exchange of telegrams

3.3.4

cyclic data

part of a telegram, which does not change its meaning during cyclic operation of the network

3.3.5

device

a slave in the communication network, (e.g., a power drive system as defined in the IEC 61800 standard family, I/O stations as defined in the IEC 61131 standard family)

3.3.6

device status

four adjacent octets inside the acknowledge telegram containing status information for each device

3.3.7

DL-segment, link, local link

single DL-subnetwork in which any of the connected DLEs may communicate directly, without any intervening DL-relaying, whenever all of those DLEs that are participating in an instance of communication are simultaneously attentive to the DL-subnetwork during the period(s) of attempted communication

3.3.8 DLSAP

distinctive point at which DL-services are provided by a single DL-entity to a single higher-layer entity

NOTE This definition, derived from ISO/IEC 7498-1, is repeated here to facilitate understanding of the critical distinction between DLSAPs and their DL-addresses (see Figure 1).

3.3.9

DL(SAP)-address

either an individual DLSAP-address, designating a single DLSAP of a single DLS-user, or a group DL-address potentially designating multiple DLSAPs, each of a single DLS-user


NOTE This terminology is chosen because ISONEC 7498-3 does not permit the use of the term DLSAP-address 2010 to designate more than a single DLSAP at a single DLS-user.

3.3.10

(individual) DLSAP-address

DL-address that designates only one DLSAP within the extended link

NOTE A single DL-entity may have multiple DLSAP-addresses associated with a single DLSAP.

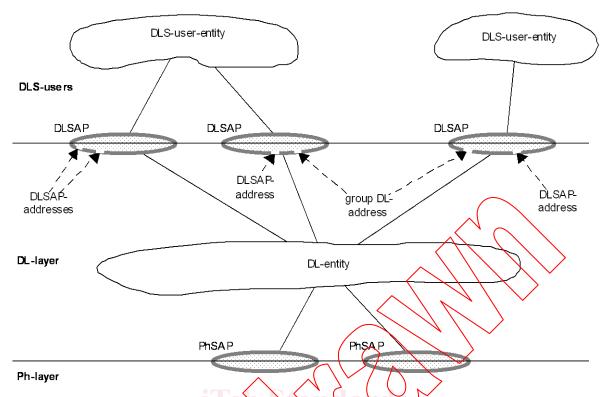

NOTE 1 DLSAPs and PhSAPs are depicted as ovals spanning the boundary between two adjacent layers.

NOTE 2 DL-addresses are depicted as designating small gaps (points of access) in the DLL portion of a DLSAP.

NOTE 3 A single DL-entity may have multiple DLSAP addresses and group DL-addresses associated with a single DLSAP.

Figure 1 - Relationships of DLSAP addresses and group DL-addresses

3.3.11

element

part of IDNs – each IDN has X elements, whereas each one has a specific meaning (e.g., number, name, data)

3.3.12

extended link

DL-subnetwork consisting of the maximal set of links interconnected by DL-relays, sharing a single DL-name (DL-address) space, in which any of the connected DL-entities may communicate, one with another, either directly or with the assistance of one or more of those intervening DL-relay entities

NOTE An extended link may be composed of just a single link.

3.3.13

frame

denigrated synonym for DLPDU

3.3.14

group DL-address

DL-address that potentially designates more than one DLSAP within the extended link. A single DL-entity may have multiple group DL-addresses associated with a single DLSAP. A single DL-entity also may have a single group DL-address associated with more than one DLSAP

3.3.15

identification number (IDN)

designation of operating data under which a data block is preserved with its attribute, name, unit, minimum and maximum input values, and the data

3.3.16

master

node, which assigns the other nodes (i.e., slaves) the right to transmit

3.3.17

node

single DL-entity as it appears on one local link

3.3.18

protocol

convention about the data formats, time sequences, and error correction in the data exchange of communication systems

3.3.19

receiving DLS-user

DL-service user that acts as a recipient of DL-user-data

NOTE A DL-service user can be concurrently both a sending and receiving DLS user.

3.3.20

sending DLS-user

DL-service user that acts as a source of DL-user-data

3.3.21

service channel (SVC)

non real-time transmission of information upon master request during RT channel

3.3.22

slave ards.iteh.a

node, which is assigned the right to transmit by the master

3.3.23

topology

3.4.9 DLE

physical network architecture with respect to the connection between the stations of the communication system

DL-entity (the local active instance of the data-link layer)

3.4 Symbols and abbreviations

	•	\checkmark	
3.4.1	AT		Acknowledge telegram
3.4.2	CA		Procedure command acknowledgment
3.4.3	СС		Cross communication between participants
3.4.4	DA		Destination address
3.4.5	DAT		Duration of acknowledge telegram
3.4.6	DL-		Data-link layer (as a prefix)
3.4.7	DLC		DL-connection
3.4.8	DLCEP		DL-connection-end-point