

ISO/IEC 80079-20-2

Edition 1.0 2016-02

INTERNATIONAL **STANDARD**

NORME INTERNATIONALE

Explosive atmospheres—STANDARD PREVIEW
Part 20-2: Material characteristics—Combustible dusts test methods
(standards.iten.ai)

Atmosphères explosives -

Partie 20-2: Caractéristiques des produits – Méthodes d'essai des poussières

combustibles 637f8656a6ef/iso-iec-80079-20-2-2016





THIS PUBLICATION IS COPYRIGHT PROTECTED Copyright © 2016 ISO/IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about ISO/IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'ISO/IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office Tel.: +41 22 919 02 11 3, rue de Varembé Fax: +41 22 919 03 00

CH-1211 Geneva 20 info@iec.ch Switzerland www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a 0.7 variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20,000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Catalogue IEC - webstore.iec.ch/catalogue

Application autonome pour consulter tous les renseignements bibliographiques sur les Normes internationales, Spécifications techniques, Rapports techniques et autres documents de l'IEC. Disponible pour PC, Mac OS, tablettes Android et iPad.

Recherche de publications IEC - www.iec.ch/searchpub

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne de termes électroniques et électriques. Il contient 20 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans 15 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

65 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.



ISO/IEC 80079-20-2

Edition 1.0 2016-02

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Explosive atmospheres – STANDARD PREVIEW Part 20-2: Material characteristics – Combustible dusts test methods

Atmosphères explosives – ISO/IEC 80079-20-2:2016

Partie 20-2: Caractéristiques des produits Méthodes d'essai des poussières combustibles 637f8656a6efiso-iec-80079-20-2-2016

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION ELECTROTECHNIQUE INTERNATIONALE

ICS 13.230; 29.260.20 ISBN 978-2-8322-3179-1

Warning! Make sure that you obtained this publication from an authorized distributor.

Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

CONTENTS

F	OREWO	RD	5
1	Scop	e	8
2	Norm	ative references	8
3	Term	s and definitions	8
4		sample requirements	
•	4.1	Receipt of sample for testing	
	4.2	Characterisation of sample	
	4.3	Preparation of sample	
	4.4	Test conditions	
5		oustible dusts and combustible flyings determination	
Ŭ	5.1	Test sequence	
	5.2	Tests to determine whether material is a combustible dust or combustible	
	5.2	flying	10
	5.2.1	• •	
	5.2.2	Determine particle distribution	11
	5.2.3	Ignition test in the Hartmann tube	11
	5.2.4	Ignition test in the 20-litre sphere	11
6	Proc	edure for characterisation of combustible dust or combustible flying	11
7	Test	methods for determination of whether a material is a combustible dust or a bustible flying	1.4
		• •	
	7.1	Modified Hartmann tube	14
	7.1.1	nubs://standards.iten.a/catalog/standards/sist/3999c32a-3c3/-48ac-aa8a-	14
	7.1.2 7.1.3		
		•	
	7.2 7.2.1	20-litre sphere	
	7.2.1		
	7.2.2	• •	
	7.2.3	Alternative method to 20-litre sphere for small test material quantities	
	7.3.1	General	
	7.3.1		_
	7.3.2	Test equipment	
8		methods for combustible dust determinations	
Ü	8.1	MIT of a dust cloud	
	8.1.1	General	
	8.1.2		
	8.1.3		
	8.2	Test for MIT of dust layer	
	8.2.1	General	
	8.2.2		
	8.2.3		
	8.2.4	,	
	8.2.5	,	
	8.2.6	·	
	8.2.7	, ,	
	8.3	Method for determining minimum ignition energy of dust/air mixtures	

© 100/120 2	.0.0	
8.3.1	General	22
8.3.2	Test equipment	22
8.3.3	Test procedure	23
8.3.4	Calibration for determination of minimum ignition energies (MIE) by	24
8.3.5	electrically generated high-voltage d.c. sparks	
	Recording of test resultsest on resistivity	
8.4.1	General	
8.4.2	Test equipment	
8.4.3	Test procedure	
8.4.4	Recording of test results	
	port	
,	rmative) Measurement of temperature distribution on the surface of the	20
		27
Annex B (in	formative) Godbert-Greenwald oven (GG)	28
•	formative) Examples of spark-generating systems	
•	eneral	
	riggering by auxiliary spark using three-electrode system	
	riggering by electrode movement	
	riggering by voltage increase (trickle-charging circuit)	
	riggering by auxiliary spark, using normal two-electrode system – Trigger	2
tra	ansformer in discharge circuit	33
Annex D (no	ansformer in discharge circuit ormative) Vertical tube (modified Hartmann tube) apparatus	34
	formative) 20-litre sphere	
	ISO/IEC 800 /9-20-2:2016 ormative) _s BAMi oventh ai/catalog/standards/sist/3999c32a-5c37-48ac-aa8a	
	formative) Data for dust explosion characteristics	
	formative) 1 m ³ vessel	
`	est principle	
	est apparatus	
	est conditions	
	est procedure	
	/	
Dibliography		
Figure 1 F	trate cal for abarractorization of combustible dust or combustible flying	10
_	rotocol for characterisation of combustible dust or combustible flying	12
	ests to define ability to form explosive dust atmosphere (combustible stible flyings)	13
	ests to characterise combustible dust or combustible flying	
_	lodified Hartmann tube	
•	leasuring cell for powder resistivity	
•	· Typical surface temperature distribution (method A)	
	· Vertical cross-section through the Godbert-Greenwald oven	
_	- Circuit – Triggering by high-voltage relay, using a two-electrode system	
_		29
	- Apparatus for determining the minimum ignition energies of dust – Triggering by auxiliary spark using three-electrode system	30
	- Apparatus for determining the minimum ignition energies of dust – Triggering by electrode movement	31
,	- Apparatus for determining the minimum ignition energies of dust	
	- Triggering by voltage increase	32

Figure C.5 – Apparatus for determining the minimum ignition energies for dust (schematic) – Trigger transformer in discharge circuit	33
Figure D.1 – Vertical tube apparatus (modified Hartmann tube)	34
Figure E.1 – Test equipment 20-litre sphere (schematic)	35
Figure E.2 – Cross-sectional view of rebound nozzle	36
Figure E.3 – Plan view of rebound nozzle	36
Figure E.4 – Cross-sectional view of dispersion cup	36
Figure F.1 – Cross-sectional arrangement of BAM oven	37
Figure H.1 – 1 m ³ vessel (schematic)	40
Figure H.2 – Location of the 6 mm holes in the semicircular dust dispenser	41
Figure H.3 – Rebound nozzle	42
Figure H.4 – Dispersion cup	43
Table 1 – Example of ignition test report	21

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/IEC 80079-20-2:2016 https://standards.iteh.ai/catalog/standards/sist/3999c32a-5c37-48ac-aa8a-637f8656a6ef/iso-iec-80079-20-2-2016

INTERNATIONAL ELECTROTECHNICAL COMMISSION

EXPLOSIVE ATMOSPHERES –

Part 20-2: Material characteristics – Combustible dusts test methods

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user. (Standards.110)
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter. https://standards.itch.ai/catalog/standards/sist/3999c32a-5c37-48ac-aa8a-
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 80079-20-2 has been prepared by subcommittee 31M: Non-electrical equipment and protective systems for explosive atmospheres, of IEC 31: Equipment for explosive atmospheres.

It is published as a double logo standard.

This first edition cancels and replaces the first edition of IEC 61241-2-1 published in 1994, the first edition of IEC 61241-2-2 published in 1993 and the first edition of IEC 61241-2-3 published in 1994, combining the requirements into a single document, and is considered to constitute a technical revision.

The text of this standard is based on the following documents:

FDIS	Report on voting		
31M/102/FDIS	31M/108/RVD		

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table. In ISO, the standard has been approved by 15 P-members out of 21 having cast a vote.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

"A list of all parts in the IEC 60079 series, under the general title *Explosive atmospheres*, as well as the International Standard 80079 series, can be found on the IEC website."

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended. iTeh STANDARD PREVIEW

The contents of the corrigendum of March 2017 have been included in this copy.

ISO/IEC 80079-20-2:2016 https://standards.iteh.ai/catalog/standards/sist/3999c32a-5c37-48ac-aa8a-637f8656a6ef/iso-iec-80079-20-2-2016

Significant changes with respect to IEC 61241-2-1:1994, IEC 61241-2-2:1993 and IEC 61241-2-3:1994

	Туре			
Explanation of the significance of the changes	Clause	Minor and editorial changes	Extension	Major technical changes
Normative references	2	Х		
Terms and Definitions	3	Х		
Dust sample Requirements	4	Х		
Combustible Dust Determination	5	Х		
Procedure for Characterisation of combustible dust or combustible flying	6	Х		
Test methods for determination of a combustible dust or a combustible flying	7	х		
MIT of a dust cloud	8.1	Х		
MIT of a dust layer	1 2 8.2			
MIE of a dust/air mixture	ldard	s.iteh_xai)		
Tests on resistivity https://standards.iteh.ai/cat		9-20-2:201 & ds/sist/3999c32a-5c37-	48ac-aa8a-	
Measurement of temperature distribution on 656 the surface of the hot plate	a6Annexec A	80079-20- x -2016		
Godbert-Greenwald oven	Annex B	Х		
Examples of spark-generating systems	Annex C	Х		
Vertical tube apparatus	Annex D	Х		
20-litre sphere	Annex E	Х		
BAM oven	Annex F	Х		
Data for dust explosion characteristics	Annex G	Х		
1m ³ vessel	Annex H	х		

EXPLOSIVE ATMOSPHERES –

Part 20-2: Material characteristics – Combustible dusts test methods

1 Scope

This part of ISO/IEC 80079 describes the test methods for the identification of combustible dust and combustible dust layers in order to permit classification of areas where such materials exist for the purpose of the proper selection and installation of electrical and mechanical equipment for use in the presence of combustible dust.

The standard atmospheric conditions for determination of characteristics of combustible dusts are:

- temperature -20 °C to +60 °C,
- pressure 80 kPa (0,8 bar) to 110 kPa (1,1 bar) and
- air with normal oxygen content, typically 21 % v/v.

The test methods defined do not apply to: DARD PREVIEW

- recognized explosives, propellants (e.g. gunpowder, dynamite), or substances or mixtures
 of substances which may, under some circumstances, behave in a similar manner or
- dusts of explosives and propellants that do not require atmospheric oxygen for combustion, or to pyrophoric substances.
 https://standards.iten.avcatalog/standards/sist/3999c32a-5c37-48ac-aa8a-

637f8656a6ef/iso-iec-80079-20-2-2016

2 Normative references

None.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

combustible dust

finely divided solid particles, 500 μm or less in nominal size, which may form explosive mixtures with air at standard atmospheric pressure and temperatures

Note 1 to entry: This includes dust and grit as defined in ISO 4225.

Note 2 to entry: The term 'solid particles' is intended to address particles in the solid phase but does not preclude a hollow particle.

3.1.1

conductive dust

combustible metal dusts and other combustible dusts with electrical resistivity equal to or less than 1 \times 10 3 $\Omega\cdot\text{m}$

Note 1 to entry: Metal dust is treated as conductive dust because it is assumed that surface oxidation cannot be depended upon to always ensure electrical resistivity greater than 1 \times 10 3 $\Omega \cdot$ m

312

non-conductive dust

combustible dust with electrical resistivity greater than 1 \times 10³ Ω ·m

3.2

combustible flyings

solid particles, including fibres, where one dimension is greater than 500 μm in nominal size, which may form an explosive mixture with air at standard atmospheric pressure and temperature

Note 1 to entry: The ratio of length to width is 3 or more.

Note 2 to entry: Examples of flyings include carbon fibre, rayon, cotton (including cotton linters and cotton waste), sisal, jute, hemp, cocoa fibre, oakum and baled waste kapok.

3.3

explosive dust atmosphere

mixture with air, under atmospheric conditions, of combustible substances in the form of dust, fibres, or flyings which, after ignition, permits self-sustaining propagation

3.4

minimum ignition temperature of a dust layer

lowest temperature of a hot surface at which ignition occurs in a dust layer under specified test conditions

3 5 iTeh STANDARD PREVIEW

minimum ignition temperature of a dust cloud

lowest temperature of a hot surface on which the most ignitable mixture of the dust with air is ignited under specified test conditions

<u>ISO/IEC 80079-20-2:2016</u>

3.6 https://standards.iteh.ai/catalog/standards/sist/3999c32a-5c37-48ac-aa8a-

minimum ignition energy (of a combustible dust/air mixture)

lowest electrical energy stored in a capacitor which upon discharge is sufficient to effect ignition of the most sensitive dust/air mixture under specified test conditions

4 Dust sample requirements

4.1 Receipt of sample for testing

A material safety data sheet or equivalent with the sample.

The test material shall be provided in suitable packaging, labelled according to relevant guidelines labelled according to relevant guidelines, and appropriate transportation.

NOTE It is usual to provide a quantity of at least 0,5 kg for testing. If sample preparation is required this may be insufficient. If only a smaller volume of material is available then the full range of testing may not be possible.

4.2 Characterisation of sample

The sample shall be representative of the material as it appears in the entire process operated.

NOTE Many unit operations such as extract systems will separate dust into finer fractions than seen in the main processing equipment and this is accounted for when taking the sample.

If the sample is not representative of the material as found in the process then sample preparation shall be carried out to apply the worst case conditions.

At least the following information about the sample shall be provided:

- minimum particle size,
- median particle size,
- maximum particle size,
- particle distribution,
- moisture content, and
- method of determination (e.g. optical methods or sieving).

If the applicant cannot provide usable data then this shall be determined separately.

4.3 Preparation of sample

If it is not possible to test the sample as received, or if the sample is no longer representative of the process material then it may be necessary to condition or alter the sample for testing. This may include

- grinding/sieving,
- drying and
- humidifying.

Any apparent changes noted in the properties of the dust during preparation of the sample, for example, by sieving or owing to temperature or humidity conditions, shall be stated in the test report.

NOTE 1 Sample preparation such as grinding and sieving, or drying can alter the material characteristics. Where finer fractions are present in a facility it is appropriate to take fractions of less than 63 μ m to give the most easily ignitable mixtures. When the sample is a mixture of substances, the sample preparation can result in a change to the sample's composition.

NOTE 2 The presence of solvents can become altered in the sample preparation process.

4.4 Test conditions

The tests shall be carried out at standard atmospheric temperature of 20 $_{-10}^{+10}$ °C and standard atmospheric pressure of 80 kPa to 110 kPa (0,8 bar to 1,1 bar) unless otherwise specified.

637f8656a6ef/iso-iec-80079-20-2-2016

5 Combustible dusts and combustible flyings determination

5.1 Test sequence

The sequence followed for the determination of the material properties of combustible dust and combustible flyings is given in 5.2, Clause 6 and Figure 1, Figure 2 and Figure 3.

NOTE 1 Refer also to the information referenced in Annex G.

NOTE 2 Testing in the Hartman tube is a screening method. The test procedure can be directly started with the 20 litre sphere or the GG Oven.

5.2 Tests to determine whether material is a combustible dust or combustible flying

5.2.1 Visual inspection

Make a visual inspection of the test material (by microscope if necessary) to determine whether the material consists of combustible flyings:

- If the material consists of combustible flyings with dust then continue the test procedure in a Hartmann tube (see 5.2.3) to determine whether the combination of the two is combustible dust.
- If the material consists only of combustible flyings then continue the test procedure in a Hartmann tube (see 5.2.3) to determine whether it is combustible flyings.

5.2.2 Determine particle distribution

For material which does not contain combustible flyings check the particle size distribution:

- If there are no particles less than 500 μm in size then the material is not a combustible dust.
- If there are any particles less than 500 μm in size then continue the test procedure in a Hartmann tube to determine whether it is a combustible dust.

5.2.3 Ignition test in the Hartmann tube

5.2.3.1 Test in a Hartmann tube with a spark (see 7.1):

- 1) If ignition occurs, the material is a combustible dust or a combustible flying (proceed to the procedure for characterisation of combustible dust or combustible flying (see Clause 6)).
- 2) If no ignition occurs:
 - a) proceed to a Hartmann tube with a hot coil ignition source (see 7.1);
 - b) it can be assumed that the minimum ignition energy is greater than 1 J and the test material is hard to ignite.

5.2.3.2 Test in a Hartmann tube with a hot coil ignition source (see 7.1):

- 1) If ignition occurs, the material is a combustible dust or a combustible flying, (proceed to the procedure for the characterisation of combustible dust or combustible flying (see Clause 6).
- 2) If no ignition occurs Teh STANDARD PREVIEW
 - a) proceed to the test in the 20-litre sphere (see 7.2); ai)
 - b) it can be assumed that the minimum ignition energy is greater than 10 J.

5.2.4 Ignition test in the 20-litre/sphere https://standards.nich.al/catalog/standards/sist/3999c32a-5c37-48ac-aa8a-

Test in the 20-litre sphere (see 7.2%656a6efiso-iec-80079-20-2-2016

- If ignition occurs the material is a combustible dust or a combustible flying (proceed to procedure for characterisation of combustible dust or combustible flying (see Clause 6)).
- If no ignition occurs then the material is not a combustible dust or a combustible flying and the testing procedure is completed.

NOTE Although the material does not form explosive mixtures with air, it can still ignite as a combustible dust layer.

If there is insufficient material available for testing in a 20-litre sphere then testing in the Godbert-Greenwald (GG) oven at 1 000 °C is an acceptable alternative (see 7.3):

- If no ignition occurs at 1 000 °C then the material is not a combustible dust or a combustible flying.
- If there is an ignition at 1 000 °C then the material should be subject to further verification in the 20-litre sphere before declaring it combustible or non-combustible.

6 Procedure for characterisation of combustible dust or combustible flying

The following is the procedure for the characterisation of combustible dust or combustible flying:

- test for dust cloud minimum ignition temperature (MIT) (see Clause 8):
 - a) GG oven (see 8.1.2) or
 - b) BAM oven (see 8.1.3)
- test for dust layer MIT (see 8.2);

- test for minimum ignition energy (MIE) of dust cloud (see 8.3);
- test for resistivity of bulk dust (see 8.4).

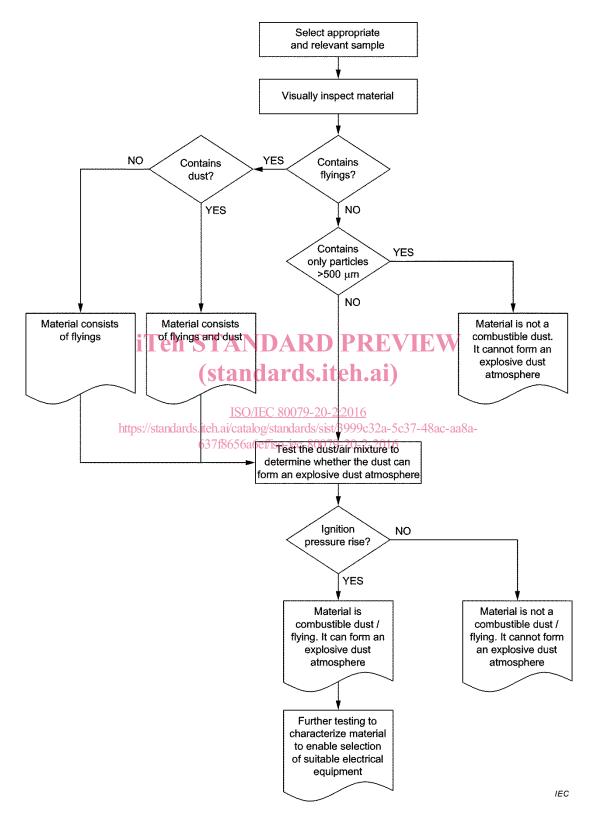


Figure 1 - Protocol for characterisation of combustible dust or combustible flying

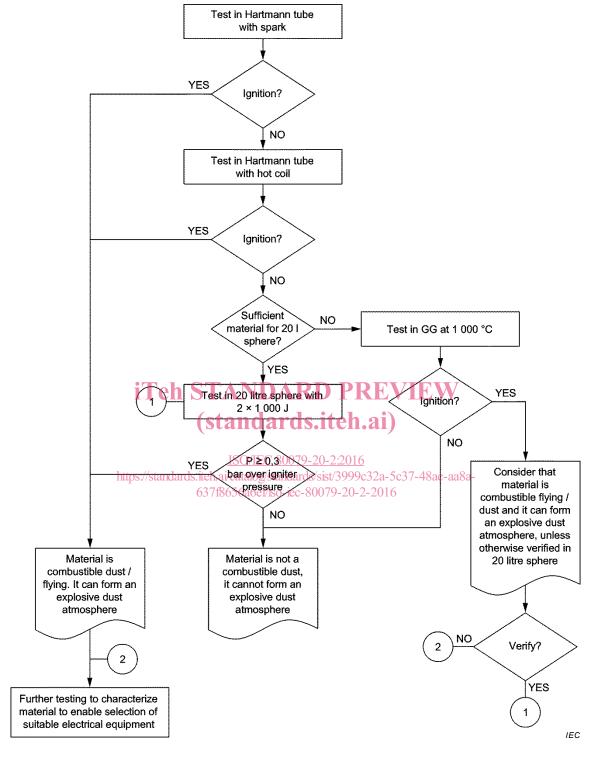


Figure 2 – Tests to define ability to form explosive dust atmosphere (combustible dust/combustible flyings)