



**SLOVENSKI STANDARD**  
**SIST ISO 10946:2000**  
**01-september-2000**

Hydraulic fluid power -- Gas-loaded accumulators with separator -- Selection of preferred hydraulic ports

Hydraulic fluid power -- Gas-loaded accumulators with separator -- Selection of preferred hydraulic ports

**iTeh STANDARD PREVIEW**

Transmissions hydrauliques -- Accumulateurs hydro-pneumatiques avec séparateur -- Sélection des orifices hydrauliques préférentiels

[SIST ISO 10946:2000](https://standards.iteh.ai/catalog/standards/sist/9c306b8b-0f1b-4477-a612-d678d6010172/sist-iso-10946-2000)

Ta slovenski standard je istoveten z: **ISO 10946:1999**

**ICS:**

23.100.99	Öi~ * ä^•æ} ä^ ã @ä!æ ã} äQã c^ { [ ç	Other fluid power system components
-----------	--	-------------------------------------

**SIST ISO 10946:2000** **en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST ISO 10946:2000

<https://standards.iteh.ai/catalog/standards/sist/9c306b8b-0fdb-4477-a612-d678d8010172/sist-iso-10946-2000>

INTERNATIONAL  
STANDARD

ISO  
10946

First edition  
1999-03-15

---

---

**Hydraulic fluid power — Gas-loaded  
accumulators with separator — Selection  
of preferred hydraulic ports**

*Transmissions hydrauliques — Accumulateurs hydropneumatiques avec  
séparateur — Sélection des orifices hydrauliques préférentiels*

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST ISO 10946:2000](https://standards.iteh.ai/catalog/standards/sist/9c306b8b-0fdb-4477-a612-d678d8010172/sist-iso-10946-2000)

[https://standards.iteh.ai/catalog/standards/sist/9c306b8b-0fdb-4477-a612-  
d678d8010172/sist-iso-10946-2000](https://standards.iteh.ai/catalog/standards/sist/9c306b8b-0fdb-4477-a612-d678d8010172/sist-iso-10946-2000)



Reference number  
ISO 10946:1999(E)

**ISO 10946:1999(E)****Foreword**

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organisations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardisation.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 10946 was prepared by Technical Committee ISO/TC 131, *Fluid power systems*.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ISO 10946:2000

<https://standards.iteh.ai/catalog/standards/sist/9c306b8b-0fdb-4477-a612-d678d8010172/sist-iso-10946-2000>

© ISO 1999

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
Case postale 56 • CH-1211 Genève 20 • Switzerland  
Internet iso@iso.ch

Printed in Switzerland

## Introduction

In hydraulic fluid power systems, power is transmitted and controlled through a liquid under pressure within an enclosed circuit.

Gas-loaded accumulators are components that are able to store and to return energy in accordance with the principle of the compressibility of gases. Hydraulic fluid enters and leaves these accumulators through ports.

# iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ISO 10946:2000](https://standards.iteh.ai/catalog/standards/sist/9c306b8b-0fdb-4477-a612-d678d8010172/sist-iso-10946-2000)

<https://standards.iteh.ai/catalog/standards/sist/9c306b8b-0fdb-4477-a612-d678d8010172/sist-iso-10946-2000>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST ISO 10946:2000

<https://standards.iteh.ai/catalog/standards/sist/9c306b8b-0fdb-4477-a612-d678d8010172/sist-iso-10946-2000>

# Hydraulic fluid power — Gas-loaded accumulators with separator — Selection of preferred hydraulic ports

## 1 Scope

This International Standard specifies the types and selection of hydraulic ports of gas-loaded accumulators with separator, which are used in hydraulic fluid power systems.

## 2 Normative references

The following normative documents contain certain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 1179-1:—<sup>1)</sup>, *Connections for general use and fluid power — Ports and stud ends with ISO 228-1 threads with elastomeric or metal-to-metal sealing — Part 1: Threaded ports.*

ISO 5596:—<sup>2)</sup>, *Hydraulic fluid power — Gas-loaded accumulators with separator — Range of pressures and volumes and characteristic quantities.*

ISO 5598:1985, *Fluid power systems and components — Vocabulary.*

ISO 6149-1:—<sup>3)</sup>, *Connections for fluid power and general use — Ports and stud ends with ISO 261 threads and O-ring sealing — Part 1: Ports with O-ring seal in truncated housing.*

ISO 6162-1:—<sup>4)</sup>, *Hydraulic fluid power — Flange connectors with split or one-piece flange clamps and metric or inch screws — Part 1: Flange connectors for use at pressures of 3,5 MPa (35 bar) to 35 MPa (350 bar), DN 13 to DN 127.*

ISO 6162-2:—<sup>4)</sup>, *Hydraulic fluid power — Flange connectors with split or one-piece flange clamps and metric or inch screws — Part 2: Flange connectors for use at pressures of 35 MPa (350 bar) to 40 MPa (400 bar), DN 13 to DN 51.*

ISO 6164-1:—<sup>5)</sup>, *Hydraulic fluid power — One-piece square-flange connections — Part 1: Four-screw square-flange connections, 25 MPa (250 bar) series, DN 10 to DN 63.*

<sup>1)</sup> To be published. (Revision of ISO 1179:1981)

<sup>2)</sup> To be published. (Revision of ISO 5596:1982)

<sup>3)</sup> To be published. (Revision of ISO 6149-1:1993)

<sup>4)</sup> To be published. (Revision of ISO 6162:1994)

<sup>5)</sup> To be published. (Revision of ISO 6164:1994)

ISO 6164-2:—<sup>5)</sup>, *Hydraulic fluid power — One-piece square-flange connections — Part 2: Four-screw square-flange connections, 40 MPa (400 bar) series, DN 10 to DN 80.*

ISO 6164-3:—<sup>5)</sup>, *Hydraulic fluid power — One-piece square-flange connections — Part 3: Four-screw square-flange connections, 50 MPa (500 bar) series, DN 12 to DN 50.*

### 3 Terms and definitions

For the purposes of this International Standard, the terms and definitions given in ISO 5598 and the following apply.

#### 3.1

##### **bladder type accumulator**

gas-loaded accumulator in which the liquid and gas are separated by a flexible bag or bladder that is normally retained at one end of the shell

#### 3.2

##### **diaphragm type accumulator**

gas-loaded accumulator in which the liquid and gas are separated by a flexible membrane that is normally retained at its largest diameter to the shell

#### 3.3

##### **piston type accumulator**

gas-loaded accumulator in which the liquid and gas are separated by a rigid sliding piston

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)

### 4 Dimensions

#### 4.1 General requirements

For threaded ports, those specified in ISO 6149-1 shall be preferred. For flange ports, those specified in ISO 6162-1, ISO 6162-2, ISO 6164-1, ISO 6164-2 and ISO 6164-3 shall be preferred. The threaded ports specified in ISO 1179-1 are optional and may be used for existing applications.

#### 4.2 Thread connections

Thread connection possibilities are illustrated in Figure 1, which shows ports, as indicated by the arrows.

#### 4.3 Requirements for ports used with diaphragm type accumulators

Ports used with diaphragm type accumulators shall be selected from those given in Table 1.

#### 4.4 Requirements for ports used with bladder or piston type accumulators

Ports used with bladder or piston type accumulators shall be selected from those given in Table 2.

### 5 Identification statement (reference to this International Standard)

Use the following statement in test reports, catalogues, and sales literature when electing to comply with this International Standard:

“Hydraulic ports for gas-loaded accumulators with separator selected in accordance with ISO 10946:1999, *Hydraulic fluid power — Gas-loaded accumulators with separator — Selection of preferred hydraulic ports.*”



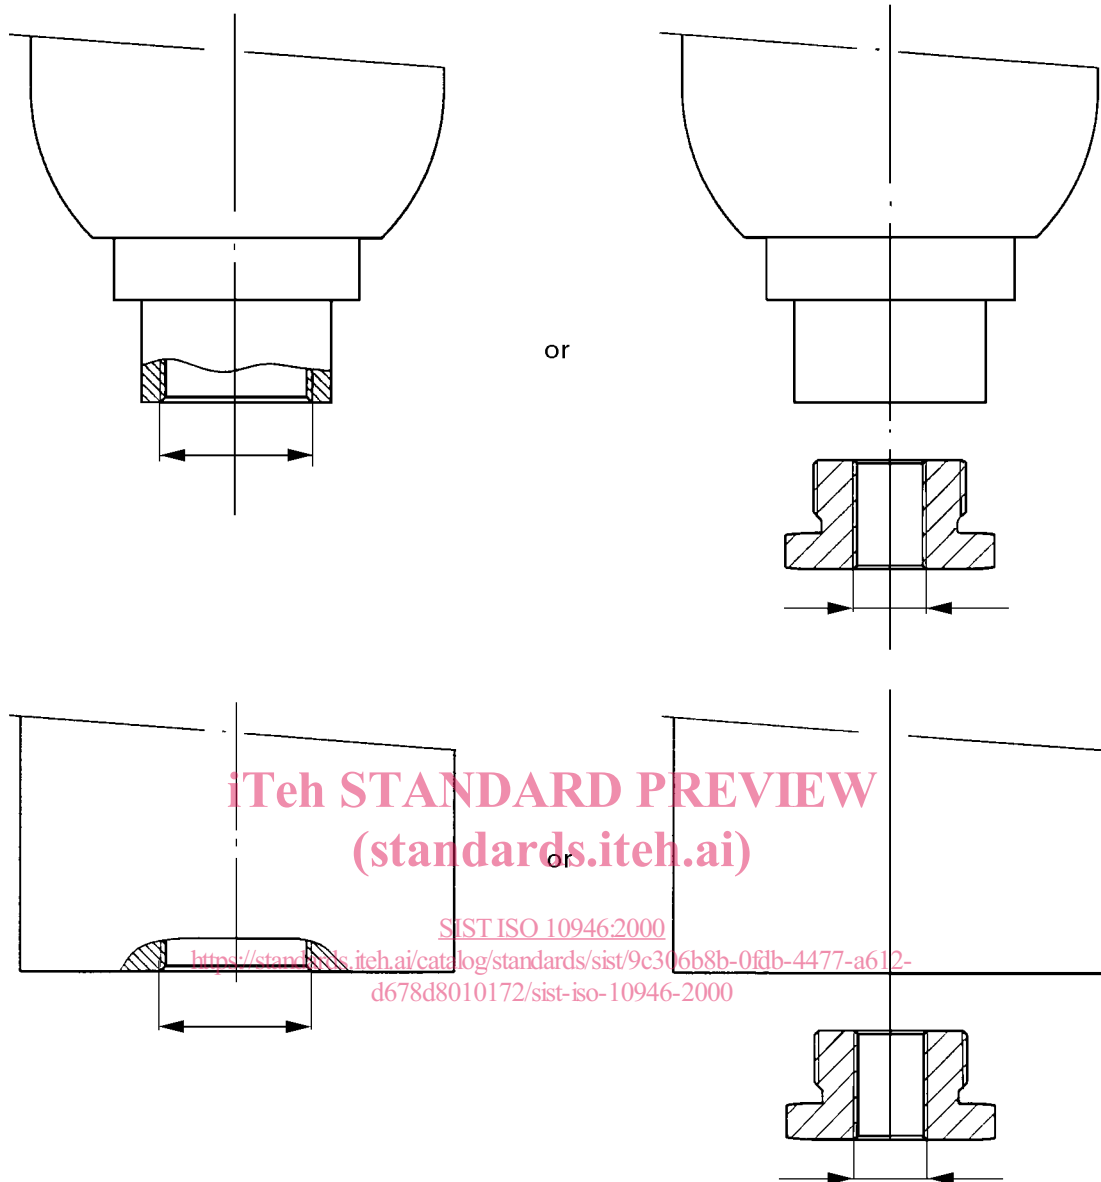


Figure 1 — Thread connection possibilities

Table 1 — Dimensions of ports for diaphragm type accumulators

Preferred port in accordance with ISO 6149-1		M14 × 1,5	M18 × 1,5	M22 × 1,5	M27 × 2
Optional port in accordance with ISO 1179-1 for existing applications		G 1/4	G 3/8	G 1/2	G 3/4
Volume l	≤ 0,4				
	> 0,4, ≤ 1,6				
	> 1,6, ≤ 6,3				
NOTE Shaded areas indicate preferred port sizes.					