

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Safety of machinery – Electro-sensitive protective equipment –
Part 2: Particular requirements for equipment using active opto-electronic
protective devices (AOPDs)**

**Sécurité des machines – Équipements de protection électro-sensibles –
Partie 2: Exigences particulières à un équipement utilisant des appareils
protecteurs optoélectroniques actifs (AOPD)**



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2013 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...).

It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Liens utiles:

Recherche de publications CEI - www.iec.ch/searchpub

La recherche avancée vous permet de trouver des publications CEI en utilisant différents critères (numéro de référence, texte, comité d'études,...).

Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

Just Published CEI - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications de la CEI. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (VEI) en ligne.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Safety of machinery – Electro-sensitive protective equipment –
Part 2: Particular requirements for equipment using active opto-electronic
protective devices (AOPDs)**

**Sécurité des machines – Équipements de protection électro-sensibles –
Partie 2: Exigences particulières à un équipement utilisant des appareils
protecteurs optoélectroniques actifs (AOPD)**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE **XA**
CODE PRIX

ICS 13.110; 29.260.99

ISBN 978-2-83220-587-7

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	6
1 Scope.....	7
2 Normative references.....	7
3 Terms and definitions.....	8
4 Functional, design and environmental requirements.....	9
4.1 Functional requirements.....	9
4.2 Design requirements.....	11
4.3 Environmental requirements.....	14
5 Testing.....	14
5.1 General.....	14
5.2 Functional tests.....	17
5.4 Environmental tests.....	34
6 Marking for identification and safe use.....	42
6.1 General.....	42
7 Accompanying documents.....	42
Annex A (normative) Optional functions of the ESPE.....	44
Annex B (normative) Catalogue of single faults affecting the electrical equipment of the ESPE, to be applied as specified in 5.3.....	48
Annex AA (informative) Type 2 AOPD periodic test configurations.....	49
Bibliography.....	51
Index.....	52
Figure 1 – Limit area for the protection against the risk of beam bypass.....	12
Figure 2 – Limit of vertical and horizontal misalignment.....	13
Figure 3 – Test piece at 45°.....	18
Figure 4 – Test piece at 90°.....	19
Figure 5 – Verifying sensing function by moving the test piece (TP) through the detection zone near the emitter, near the receiver/retro-reflector target and at the midpoint.....	19
Figure 6 – Limit values for the effective aperture angle (EAA).....	21
Figure 7 – Determination of the minimum detection capability.....	22
Figure 8 – Measuring method for EAA (direction).....	23
Figure 9 – Prism test to measure EAA of each beam.....	25
Figure 10 – EAA test using prism.....	26
Figure 11 – Design calculations for a wedge prism.....	27
Figure 12 – Example of optical subsystem: Emitter on left – Receiver on right.....	27
Figure 13 – Example of SMD LED Model.....	28
Figure 14 – Example of intensity distribution of emitting element.....	28
Figure 15 – Example of emitter model with beams internally blocked by aperture stop.....	28
Figure 16 – Example of receiving unit with off axis beam portion reflected internally on mechanical elements.....	29
Figure 17 – Example of test piece inside model of optical subsystem with passing radiation on the receiver.....	30

Figure 18 – Example of emitting unit adjusted at the limit.....	31
Figure 19 – Extraneous reflection test with mirror outside of limit area.....	32
Figure 20 – AOPD misalignment test	33
Figure 21 – Light interference test – Direct method	35
Figure 22 – Light interference test – Test set-up with incandescent light source	36
Figure 23 – Light interference test – Test set-up with fluorescent light source.....	37
Figure 24 – Light interference test – Test set-up with flashing beacon light source	38
Figure 25 – Light interference test – Test set-up with stroboscopic light source	39
Figure AA.1 – Single beam sensing device	49
Figure AA.2 – Series connection of single beam sensing devices	49
Figure AA.3 – Assembly of multiple beams tested individually.....	49
Figure AA.4 – Example of type 2 AOPD with internal test.....	50
Table 1 – Correspondences of requirements/testing and AOPD designs	15
Table 2 – Maximum permissible angle of misalignment (in degrees) for a type 2 ESPE depending on the dimensions of the light curtain.....	32
Table 3 – Maximum permissible angle of misalignment (in degrees) for a type 4 ESPE depending on the dimensions of the light curtain.....	32

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[IEC 61496-2:2013](https://standards.iteh.ai/catalog/standards/sist/b574f218-93e1-465b-8d9e-83689c058516/iec-61496-2-2013)

<https://standards.iteh.ai/catalog/standards/sist/b574f218-93e1-465b-8d9e-83689c058516/iec-61496-2-2013>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**SAFETY OF MACHINERY –
ELECTRO-SENSITIVE PROTECTIVE EQUIPMENT –****Part 2: Particular requirements for equipment using
active opto-electronic protective devices (AOPDs)**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61496-2 has been prepared by IEC technical committee 44: Safety of machinery – Electrotechnical aspects, in collaboration with CENELEC technical committee 44X: Safety of machinery – Electrotechnical aspects.

This third edition cancels and replaces the second edition published in 2006. It constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) Requirements have been corrected and made easier to understand.
- b) Test procedures have been revised to make them easier to perform and to improve repeatability.
- c) Guidance is provided for the evaluation and verification of AOPDs using design techniques for which the test procedures of this part are not sufficient.

This standard has the status of a product family standard and may be used as a normative reference in a dedicated product standard for the safety of machinery.

This standard is to be used in conjunction with IEC 61496-1:2012.

This part supplements or modifies the corresponding clauses in IEC 61496-1.

Where a particular clause or subclause of Part 1 is not mentioned in this Part 2, that clause or subclause applies as far as is reasonable. Where this part states "addition", "modification" or "replacement", the relevant text of Part 1 is adapted accordingly.

The text of this standard is based on the following documents:

CDV	Report on voting
44/651/CDV	44/670/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61496 series, published under the general title *Safety of machinery – Electro-sensitive protective equipment* can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

Electro-sensitive protective equipment (ESPE) is applied to machinery that presents a risk of personal injury. It provides protection by causing the machine to revert to a safe condition before a person can be placed in a hazardous situation.

This part of IEC 61496 provides particular requirements for the design, construction and testing of electro-sensitive protective equipment (ESPE) for the safeguarding of machinery, employing active opto-electronic protective devices (AOPDs) for the sensing function.

Each type of machine presents its own particular hazards, and it is not the purpose of this standard to recommend the manner of application of the ESPE to any particular machine. The application of the ESPE should be a matter for agreement between the equipment supplier, the machine user and the enforcing authority; in this context, attention is drawn to the relevant guidance established internationally, for example, ISO 12100.

Due to the complexity of the technology of ESPEs there are many issues that are highly dependent on analysis and expertise in specific test and measurement techniques. In order to provide a high level of confidence, independent review by relevant expertise is recommended.

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

[IEC 61496-2:2013](https://standards.iteh.ai/catalog/standards/sist/b574f218-93e1-465b-8d9e-83689c058516/iec-61496-2-2013)

<https://standards.iteh.ai/catalog/standards/sist/b574f218-93e1-465b-8d9e-83689c058516/iec-61496-2-2013>

SAFETY OF MACHINERY – ELECTRO-SENSITIVE PROTECTIVE EQUIPMENT –

Part 2: Particular requirements for equipment using active opto-electronic protective devices (AOPDs)

1 Scope

This clause of Part 1 is replaced by the following:

This part of IEC 61496 specifies requirements for the design, construction and testing of electro-sensitive protective equipment (ESPE) designed specifically to detect persons as part of a safety-related system, employing active opto-electronic protective devices (AOPDs) for the sensing function. Special attention is directed to features which ensure that an appropriate safety-related performance is achieved. An ESPE may include optional safety-related functions, the requirements for which are given in Annex A of IEC 61946-1:2012 and of this part.

This part of IEC 61496 does not specify the dimensions or configurations of the detection zone and its disposition in relation to hazardous parts for any particular application, nor what constitutes a hazardous state of any machine. It is restricted to the functioning of the ESPE and how it interfaces with the machine.

Excluded from this part are AOPDs employing radiation at wavelengths outside the range 400 nm to 1500 nm.

<https://standards.iteh.ai/catalog/standards/sist/b574f218-93e1-465b-8d9e-83689c058516/iec-61496-2-2013>

This part of IEC 61496 may be relevant to applications other than those for the protection of persons, for example, the protection of machinery or products from mechanical damage. In those applications, additional requirements may be necessary, for example, when the materials that are to be recognized by the sensing function have different properties from those of persons.

This part does of IEC 61496 not deal with EMC emission requirements.

2 Normative references

This clause of Part 1 is applicable except as follows:

Additional references:

IEC 60825-1:2007, *Safety of laser products – Part 1: Equipment classification and requirements*

IEC 61496-1:2012, *Safety of machinery – Electro-sensitive protective equipment – Part 1: General requirements and tests*

IEC 62471, *Photobiological safety of lamps and lamp systems*

ISO 13855, *Safety of machinery – Positioning of safeguards with respect to the approach speeds of parts of the human body*

EN 471:2003, *High-visibility warning clothing for professional use – Test methods and requirements.*

3 Terms and definitions

NOTE At the end of this standard there is an index which lists, in alphabetical order, the terms and acronyms defined in Clause 3 and indicates where they are used in the text.

This clause of Part 1 is applicable except as follows:

Additional definitions:

3.201

active opto-electronic protective device

AOPD

device whose sensing function is performed by opto-electronic emitting and receiving elements detecting the interruption of optical radiations generated, within the device, by an opaque object present in the specified detection zone (or for a light beam device, on the axis of the light beam)

Note 1 to entry: This note applies to the French language only.

3.202

beam centre-line

optical path joining the optical centre of an emitting element to the optical centre of the corresponding receiving element that is intended to respond to light from that emitting element during normal operation

Note 1 to entry: The optical axis of a light beam is not always on the beam centre-line.

Note 2 to entry: Physical displacement of the beam centre-line may occur as a consequence of normal operation (for example, by the use of a motor-driven mirror).

Note 3 to entry: For an AOPD that operates on a retro-reflective technique, the optical path is defined by the retro-reflector target together with the emitting and receiving elements.

3.203

effective aperture angle

EAA

maximum angle of deviation from the optical alignment of the emitting element(s) and the receiving element(s) within which the AOPD continues in normal operation

Note 1 to entry: This note applies to the French language only.

3.204

light beam device

AOPD comprising one or more emitting element(s) and corresponding receiving element(s), where a detection zone is not specified by the supplier

3.205

light curtain

AOPD comprising an integrated assembly of one or more emitting element(s) and one or more receiving element(s) forming a detection zone with a detection capability specified by the supplier

Note 1 to entry: A light curtain with a large detection capability is sometimes referred to as a light grid.

3.206

test piece

opaque cylindrical element used to verify the detection capability of the AOPD

3.207

geometrically restricted optical design

GROD

AOPD using an optic design where

- the effective aperture angle (EAA) of each emitting and each receiving element does not exceed the values given in Figure 6 and
- the axes of the optical beams are parallel and
- side lobes are minimized and
- the spacing between beam centre-lines is uniform and
- the value of detection capability is based on the complete obscuration of at least one beam for any and all positions of the test piece within the detection zone (see Figure 7).

Note 1 to entry: This note applies to the French language only.

Replacement:

3.3

detection capability

dimension representing the diameter of the test piece which:

- for a light curtain, will actuate the sensing device when placed in the detection zone;
- for a single light beam device, will actuate the sensing device when placed in the beam centre-line;
- for a multiple light beam device, will actuate the sensing device when placed in any beam centre-line

Note 1 to entry: The term “detection capability” can also be used to mean the ability to detect a test piece of the specified diameter.

iTeh STANDARD PREVIEW

4 Functional, design and environmental requirements

This clause of Part 1 is applicable except as follows:

<https://standards.iteh.ai/catalog/standards/sist/b574f218-93e1-465b-8d9e-83689c058516/iec-61496-2-2013>

4.1 Functional requirements

4.1.2 Sensing function

Replacement:

4.1.2.1 General requirements

The sensing function shall be effective over the detection zone specified by the supplier. No adjustment of the detection zone, detection capability or blanking function shall be possible without the use of a key, key-word or tool.

The sensing device of a light curtain shall be actuated and the OSSD(s) shall go to the OFF-state when a test piece in accordance with 4.2.13 is placed anywhere within the detection zone either static (at any angle) or moving (with the axis of the cylinder normal to the plane of the detection zone), at any speed between 0 m/s and 1,6 m/s.

The sensing device of a light beam device shall be actuated and the OSSD(s) shall go to the OFF-state when a test piece in accordance with 4.2.13 is present in the beam centre-line, at any point throughout the operating distance, with the axis of the cylinder normal to the axis of the beam.

NOTE The purpose of this requirement is to ensure that the OSSD(s) go to the OFF-state when a person or part of a person passes through the detection zone or light beam. Based on a dimension of 150 mm and a walking speed of 1,6 m/s, a minimum OFF time of 80 ms was determined to be adequate.

When the OSSD(s) go to the OFF-state, they shall remain in the OFF-state while the test piece is present in the detection zone (or light beam) or for at least 80 ms, whichever is greater.

Where the supplier states that an AOPD can be used to detect objects moving at speeds greater than those specified above, the above requirements shall be met at any speed up to and including the stated maximum speed(s).

4.1.2.2 Additional requirements for AOPDs using retro-reflective techniques and for AOPDs using mixed emitters and receivers in the same assembly

4.1.2.2.1 General

AOPDs using retro-reflective techniques where the light beam traverses the detection zone more than once (over the same path) and AOPDs using mixed emitters and receivers in the same assembly shall not fail to danger if a reflective object (for example, reflective clothes) is placed at any position in the detection zone.

NOTE The use of mirrors to return the light beam is not considered to be a retro-reflective technique.

4.1.2.2.2 Sensing function

The OSSD(s) shall go to the OFF-state when a reflective object of a size equal to, or greater than, the diameter and length of the test piece (see 4.2.13) is placed in the detection zone at any position as specified in 5.2.1.4.

For a type 4 AOPD, under normal operating conditions, the OSSD(s) shall go to the OFF-state when a reflective object, as specified in 5.2.1.4 is placed as close as practicable in front of the sensing surface of the emitting/receiving elements.

ITeH STANDARD PREVIEW
(standards.iteh.ai)

4.1.3 Types of ESPE

Replacement:

[IEC 61496-2:2013](#)

In this part of IEC 61496, only type 2 and type 4 ESPEs are considered. The types differ in their performance in the presence of faults and under influences from environmental conditions. In Part 1, the effects of electrical and electromechanical faults are considered (such faults are listed in Annex B, Part 1). It is the responsibility of the machine manufacturer and/or the user to determine which type is required for a particular application.

A type 2 ESPE shall fulfil the fault detection requirements of 4.2.2.3.

For a type 2 ESPE, in normal operation the output circuit of at least one output signal switching device shall go to the OFF-state when the sensing function is actuated, or when power is removed from the ESPE.

A type 2 ESPE shall have a means of periodic test.

A type 4 ESPE shall fulfil the fault detection requirements of 4.2.2.5 of IEC 61496-1:2012.

For type 4 ESPE, in normal operation the output circuit of at least two output signal switching devices shall go to the OFF-state when the sensing function is actuated, or when power is removed from the ESPE.

When a single safety-related data interface is used to perform the functions of the OSSD(s), then the data interface and associated safety-related communication interface shall meet the requirements of 4.2.4.4 of IEC 61496-1:2012. In this case, a single safety-related data interface can substitute for two OSSDs in a type 4 ESPE.

4.2 Design requirements

4.2.2 Fault detection requirements

4.2.2.3 Particular requirements for a type 2 ESPE

Addition:

The periodic test shall verify that each light beam operates in the manner specified by the supplier.

Different configurations are considered that differ in the way the testing of the safety related performance is carried out.

Annex AA, Figures AA.1, AA.2 and AA.3 are examples of type 2 AOPDs where the periodic test is externally initiated and the results are externally evaluated. Annex AA, Figure AA.4 is an example of a type 2 AOPD where the periodic test is automatically initiated and evaluated internally.

For a type 2 AOPD where the periodic test is internally initiated and evaluated, single faults that lead to the loss of the automatically initiated internal test shall be detected and shall result in a lock-out condition.

4.2.2.4 Particular requirements for a type 3 ESPE

This subclause of Part 1 is not applicable.

Additions:

4.2.12 Integrity of the AOPD detection capability


The design of the AOPD shall be such that the AOPD detection capability does not change from the value stated by the supplier when the AOPD is operated under any and all combinations of the following:

- any condition within the specification of the supplier;
- the environmental conditions specified in 4.3;
- at the limits of alignment and/or adjustment;
- over the entire detection zone.

If a single fault (as specified in Annex B of IEC 61496-1:2012), which under normal operating conditions (see 5.1.2.1 of IEC 61496-1:2012) would not result in a loss of AOPD detection capability but, when occurring with a combination of the conditions specified above, would result in such a loss, that fault together with that combination of conditions shall be considered as a single fault, and the AOPD shall respond to such a single fault as required in 4.2.2.

The AOPD shall be designed and constructed to:

- a) limit the possibility of failure to danger resulting from extraneous reflections (for operating range up to 3 m, see Figure 1);
- b) limit the misalignment at which normal operation is possible.
For an operating range of 3 m the limits of Figure 2 shall be met;
- c) limit the possibility of malfunction during exposure to extraneous light in the range of 400 nm to 1 500 nm.

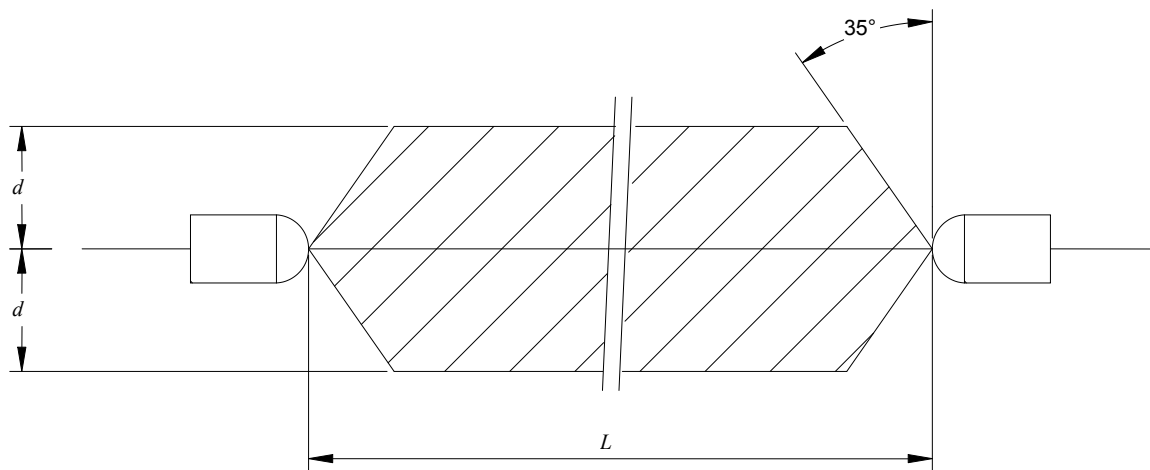

IEC 100/13


For type 4: $d = 131 \text{ mm}$, $L = 250 \text{ to } 3\,000 \text{ mm}$

For type 2: $d = 262 \text{ mm}$, $L = 500 \text{ to } 3\,000 \text{ mm}$

NOTE In this figure, extraneous reflections from surfaces outside the shaded area will not cause a failure to danger. For short ranges (250 mm for type 4 and 500 mm for a type 2), the angle of 35° is a limit selected by the working group based on known designs of AOPDs.

Figure 1 – Limit area for the protection against the risk of beam bypass

If the AOPD is intended to provide protection when mounted very close to a reflective surface (i.e. inside the shaded area of Figure 1), the AOPD shall be designed in such a manner that no optical bypassing can occur on the reflective surfaces. For such a device, an EAA much less than $2,5^\circ$ (for example, less than $0,4^\circ$) can be necessary. In this case, Figure 1 does not apply and the limits of protection against optical bypassing shall be as specified by the manufacturer.

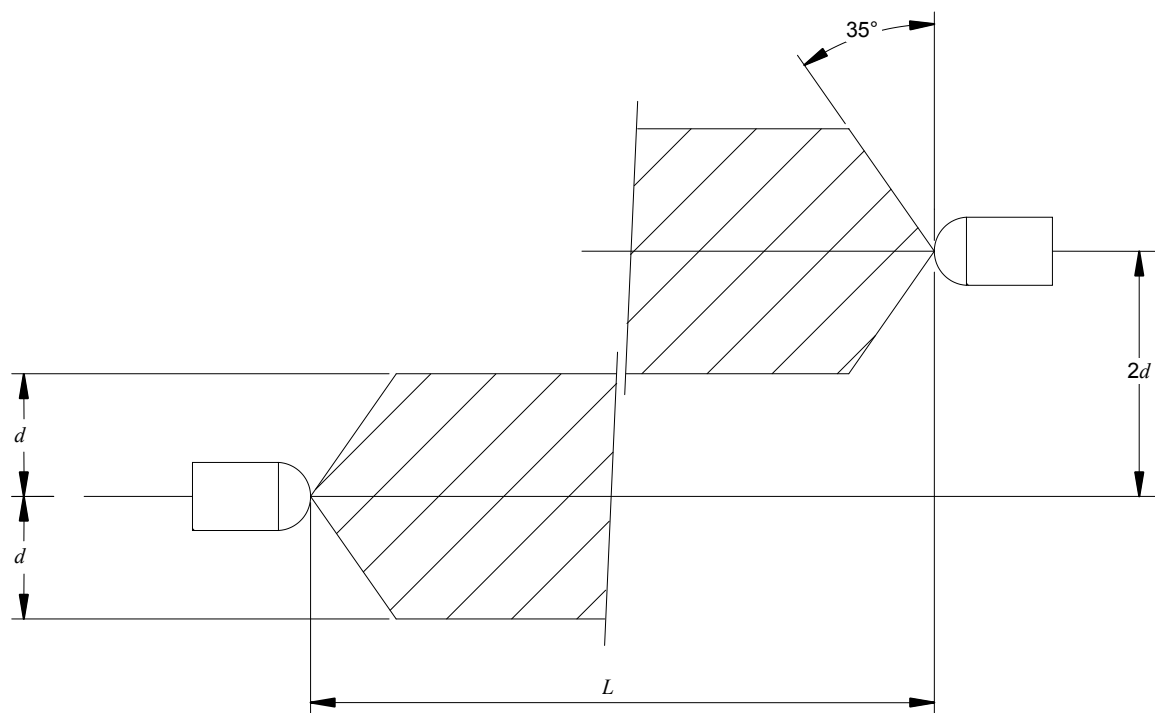

IEC 101/13

For type 4: $2d = 262 \text{ mm}$, $L = 3\,000 \text{ mm}$

For type 2: $2d = 524 \text{ mm}$, $L = 3\,000 \text{ mm}$

Figure 2 – Limit of vertical and horizontal misalignment

<https://standards.iteh.ai/catalog/standards/sist/b574f218-93e1-465b-8d9e-83689c058516/iec-61496-2-2013>

4.2.13 Test piece

The test piece shall be cylindrical and opaque, with a minimum effective length of 150 mm. The diameter of the test piece shall not exceed the AOPD detection capability stated by the supplier.

For AOPDs using retro-reflective techniques and for AOPDs using mixed emitter/receivers in the same assembly (see 4.1.2.2), the surface of the opaque test piece shall be:

- a retro-reflecting material conforming to the requirements for retro-reflection of EN 471 class 2 or equivalent;

NOTE Table 5 in EN 471:2003 defines the minimum coefficient of retro-reflection for class 2 material as $330 \text{ cd lx}^{-1} \text{ m}^{-2}$ with an entrance angle of 5° and an observation angle of $0,2^\circ$ ($12'$).

- a mirror-type reflective surface having a reflection factor greater than or equal to 90 % at the operating wavelength, for example, polished chrome plating or polished aluminium;
- a diffuse reflective surface, white with a coefficient of diffuse reflectance in the range of 80 % to 90 % at the wavelength of the emitter. Example of suitable material is white paper.

For an AOPD detection capability of not more than 40 mm, the test piece for a light curtain shall be provided by the supplier and shall be marked with the following:

- diameter in millimetres;
- type reference and an indication of the AOPD with which the test piece is intended to be used.

When more than one detection capability can be configured on the AOPD, the supplier shall provide a test piece for each detection capability.