



# Standard Practice for Handling, Transporting, and Installing Nonvolatile Residue (NVR) Sample Plates Used in Environmentally Controlled Areas for Spacecraft<sup>1</sup>

This standard is issued under the fixed designation E 1234; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

<sup>ε1</sup> NOTE—To bring Subcommittee E21.05's existing standards into compliance with Part H of ASTM's Form and Style Manual, the M designation has been editorially removed in July 2000.

## 1. Scope

1.1 This practice covers the handling, transporting, and installing of sample plates used for the gravimetric determination of nonvolatile residue (NVR) within and between facilities.

1.2 The values stated in SI units are to be regarded as the standard.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

## 2. Referenced Documents

### 2.1 ASTM Standards:

E 1235 Test Method for Gravimetric Determination of Nonvolatile Residue (NVR) in Environmentally Controlled Areas for Spacecraft<sup>2</sup>

F 50 Practice for Continuous Sizing and Counting of Airborne Particles in Dust-Controlled Areas and Cleanrooms Using Instruments Capable of Detecting Single Submicrometre and Larger Particles<sup>2</sup>

### 2.2 U.S. Federal Standard:<sup>3</sup>

FED-STD-209 Airborne Particulate Cleanliness Classes in Cleanrooms and Clean Zones.

### 2.3 U.S. Department of Defense Standards:<sup>3</sup>

MIL-F-51068F Filters, Particulate (High-Efficiency Fire Resistant)

Air Force TO 00-25-203, 1 Dec. 1972, Change 15, 24 Oct. 1992, Contamination Control of Aerospace Facilities, U.S. Air Force.

MIL-STD-1246 Product Cleanliness Levels and Contami-

nation Control Program.

2.4 *Institute of Environmental Sciences:*<sup>4</sup>

IES-RP-CC001.3 HEPA and ULPA Filters

IES-RP-CC006.2 Testing Cleanrooms

IES-RP-CC016 The Rate of Deposition of Nonvolatile Residue in Cleanrooms

2.5 *American National Standards Institute:*

ANSI/ASME B46.1-1985 Surface Texture (Surface Roughness, Waviness, and Lay)<sup>5</sup>

## 3. Terminology

### 3.1 Definitions:

3.1.1 *air cleanliness class (airborne particulate cleanliness class), n*—the level of cleanliness specified by the maximum allowable number of particles per cubic meter (cubic foot) of air as defined in FED-STD-209.

3.1.2 *clean area, n*—a general term that includes cleanrooms, controlled areas, good housekeeping areas, and other areas that have contamination control by physical design and specified operating procedures.

3.1.3 *clean zone, n*—a defined space in which the contamination is controlled to meet specified cleanliness levels.

3.1.4 *contaminant, n*—unwanted molecular and particulate matter that could affect or degrade the performance of the components upon which they reside.

3.1.5 *contamination, n*—a process of contaminating.

3.1.6 *controlled area, n*—an environmentally controlled area, operated as a cleanroom, but without the final stage of HEPA (or better) filters used in cleanrooms.

3.1.6.1 *Discussion*—Only rough filters (50 to 60 % efficiency) and medium efficiency filters (80 to 85 % efficiency) are required for a controlled area. (See Air Force T.O. 00-25-203.) The maximum allowable airborne particle concentrations are Class M7 (283 000) area for particles  $\geq 0.5 \mu\text{m}$  and Class M6.5 (100 000) for particles  $\geq 5.0 \mu\text{m}$ .

3.1.7 *environmentally controlled areas, n*—cleanrooms,

<sup>4</sup> Available from Institute of Environmental Sciences, 940 E. Northwest Highway, Mount Prospect, IL 60056.

<sup>5</sup> Available from American Society of Mechanical Engineers, United Engineering Center, 345 E. 47th St., New York, NY 10017.

<sup>1</sup> This practice is under the jurisdiction of ASTM Committee E-21 on Space Simulation and Applications of Space Technology and is the responsibility of Subcommittee E21.05 on Contamination.

Current edition approved Aug. 15, 1995. Published October 1995. Originally published as E 1234 – 88. Last previous edition E 1234 – 88 (1993).

<sup>2</sup> *Annual Book of ASTM Standards*, Vol 15.03.

<sup>3</sup> Available from Standardization Documents Order Desk, Bldg. 4 Section D, 700 Robbins Ave., Philadelphia, PA, 19111-5094, Attn.: NPODS.

controlled areas, good housekeeping areas, and other enclosures that are designed to protect products from contamination.

3.1.7.1 *Discussion*—Cleanliness is achieved by controlling air purity, temperature, humidity, materials, garments, and personnel activities.

3.1.8 *facility (clean facility), n*—the total real property required to accomplish the cleanroom functions.

3.1.9 *good housekeeping area, n*—an environmentally controlled area without quantitative cleanliness requirements but maintained in a visibly clean condition.

3.1.9.1 *Discussion*—Office, laboratory, and storage areas with air conditioning and janitorial service are typical of good housekeeping areas.

3.1.10 *HEPA (high efficiency particulate air) filter, n*—a filter for air with a removal efficiency in excess of 99.97 % for 0.3- $\mu\text{m}$  sized particles.

3.1.10.1 *Discussion*—For this application, HEPA filters shall meet the requirements of MIL-F-51068F and paragraph 6.8 of this practice.

3.1.11 *molecular contaminant—nonparticulate contaminant, n*—nonparticulate matter.

3.1.11.1 *Discussion*—The molecular contaminant may be in a gaseous, liquid, or solid state. It may be uniformly or nonuniformly distributed, or be in the form of droplets. Molecular contaminants account for most of the NVR.

3.1.12 *NVR (nonvolatile residue), n*—quantity of residual soluble, suspended, and particulate matter remaining after the controlled evaporation of a volatile liquid at a specified temperature.

3.1.12.1 *Discussion*—The liquid is usually filtered through a membrane filter, of a specified size, before evaporation. The process used to determine the NVR may affect the quantitative measurement. Process factors include filter size, solvent, and the evaporation temperature and atmosphere. For this reason, the process must be defined.

3.1.13 *particle (particulate contaminant), n*—a piece of matter in a solid or liquid (droplet) state with observable length, width, and thickness. The size of a particle is usually defined by its greatest dimension and is specified in micrometres.

## 4. Summary of Practice

4.1 Covered, stainless steel, NVR plates are transported in a sealed carrier within an outer nylon bag to the facility that is to be monitored for NVR deposition.

4.2 The outer bag is removed from the plate carrier within the entrance air lock of the cleanroom, controlled area, or other environmentally controlled area in accordance with the operational procedures for that facility and associated clean areas.

4.3 The clean NVR plate carrier is taken into the clean area.

4.4 Locations for attaching the plates within the clean area are in accordance with the facility contamination control plan, operating procedures, and other official documentation.

4.5 Each NVR plate is removed from the carrier, the cover is removed, and the plate is mounted in a vertical position within the clean area.

4.6 The cover is returned to the plate carrier for storage until required when the plates are collected after the required exposure time.

4.7 One of the NVR plates is removed from the carrier, the cover is removed, the cover is replaced, and the plate is returned to the carrier. This NVR plate is handled in the same manner as the exposed plates. This plate is designated as the blank or control sample.

4.8 After exposure, the NVR plates are removed from their locations in the clean area and are replaced with clean NVR plates in accordance with the facility and clean area contamination control plan, operating procedures, and other official documents.

4.9 The exposed plates are covered and placed into the original NVR plate carrier, returned to the analysis laboratory, and processed in accordance with Test Method E 1235.

## 5. Apparatus and Materials

5.1 *NVR Plate*, Type 316 corrosion resistant steel with an area of approximately 0.1 m<sup>2</sup> (1 ft<sup>2</sup>). The plate shown in Fig. 1 has been found to be satisfactory. The surface texture of the sampling surface shall be 0.80  $\mu\text{m}$  (32  $\mu\text{in.}$ ) or better per ANSI/ASME B46.1. The plate shall be electropolished and engraved with an identification number.

5.2 *NVR Plate Cover*, Type 316 corrosion resistant steel. The cover shown in Fig. 2 has been found to be satisfactory. The surface texture shall be 0.80  $\mu\text{m}$  (32  $\mu\text{in.}$ ) or better per ANSI/ASME B46.1.

5.3 *Noncontaminating Nylon Bag* to enclose each covered NVR plate.<sup>6</sup>

5.3.1 Bags shall meet the safety and outgassing requirements for the spacecraft and spacecraft processing facility and shall not contain or generate molecular or particulate matter that could contaminate the NVR plate or NVR plate carrier.

5.4 *NVR Plate Carrier*—The sealable, aluminum carrier shown in Fig. 3 has been found to be satisfactory. The carrier shall be constructed so as to prevent cross contamination between plates.<sup>7</sup>

5.5 *Noncontaminating Nylon Bag*<sup>6</sup> to protect the NVR plate carrier in 5.4 nylon film material shall meet the safety and outgassing requirements for the spacecraft and spacecraft processing facility. (See Note 2.)

5.6 *HEPA filtered*, Class M 3.5 (Class 100), or better environment, as defined in FED-STD-209, unidirectional air flow, clean work station.

5.7 *Gloves*, solvent compatible and resistant.<sup>7</sup> (**Warning**—Gloves shall be used to protect the hands from accidental spills of the NVR solvent and minimize contamination of exposed samples. Gloves shall be selected to meet local safety and contamination control requirements.)


5.8 *Oil-Free Aluminum Foil*,<sup>8</sup> to cover the NVR plate if the cover in 6.2 is not used.

5.9 *HEPA Filters*—All HEPA filters shall be constructed of low outgassing, corrosion resistant, and fire-resistant materials such as Grade 1 in IES-RP-CC001.3 and MIL-F-51068F. Types

<sup>6</sup> Nylon 6 (heat sealable Capran 980 from Allied Chemical) has been found to be satisfactory.

<sup>7</sup> Pioneer green nitrile gloves, Catalog No. A10-1, have been found to be satisfactory.

<sup>8</sup> Fed Spec. Food Service Grade aluminum foil, oil free, Federal Stock No. 8135-00-724-0551 has been found to be satisfactory.

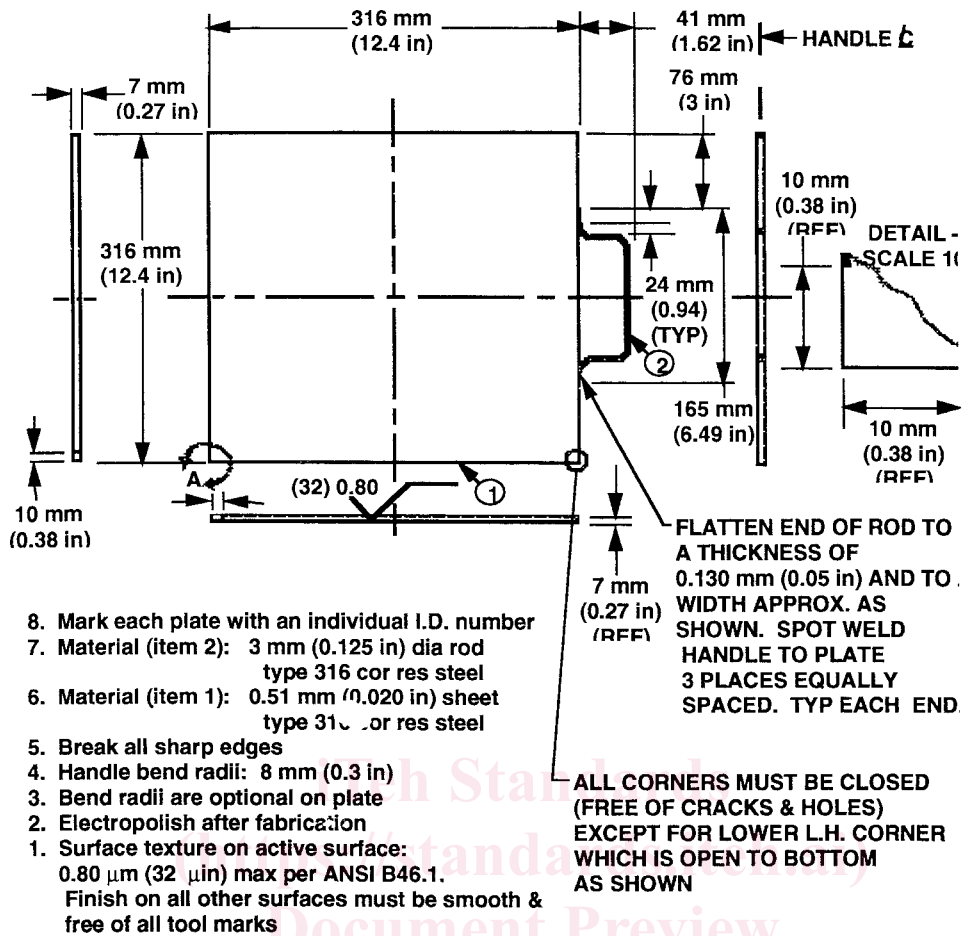

NOTE 1—Unless otherwise specified

1. Surface texture on active surface: 0.80 μm (32 μin.) max per ANSI B46.1. Finish on all other surfaces must be smooth and free of all tool marks
2. Electropolish after fabrication
3. Bend radii are optional on plate
4. Handle bend radii: 8 mm (0.3 in.)
5. Break all sharp edges
6. Material (Item 1): 0.51-mm (0.020-in.) sheet type 316 cor res steel
7. Material (Item 2): 3-mm (0.125-in.) dia rod type 316 cor res steel
8. Mark each plate with an individual I.D. number

FIG. 1 NVR Collector Plate

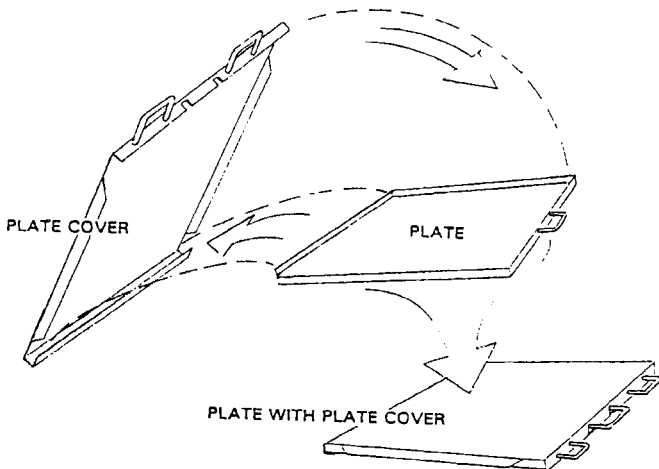


FIG. 2 NVR Plate Cover

IIA and IID, MIL-F-51068F, with stainless steel or aluminum frames, should be considered. The filters shall not be tested with DOP (dioctylphthalate) or other liquid aerosols. Ambient air and solid aerosol test methods are acceptable alternatives to the DOP test.

## 6. Procedure

6.1 Clean and prepare the NVR sample plates and plate covers in accordance with Cleaning of Equipment (8.2) of Test Method E 1235.

6.2 Verify that the carrier is visually clean. If cleaning is required, clean to Level 100A per MIL-STD-1246.

6.3 Perform all packaging operations in a unidirectional air flow, clean work station [Class M3.5 (Class 100) environment as defined in FED-STD-209] or an equivalent cleanroom or clean zone.

6.4 Verify that the NVR plate cover (5.2) is on the NVR plate or that the oil-free aluminum foil (5.8) is installed.