

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Digital load side transmission lighting control (DLT) –
Part 1: Basic requirements**

standards.iteh.ai

**Commande d'éclairage par transmission numérique côté charge (DLT) –
Partie 1: Exigences de base**

IEC 62756-1:2015

<https://standards.iteh.ai/catalog/standards/sist/50fa5312-50da-4495-a3e9-7999ba8be304/iec-62756-1-2015>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2015 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

More than 60 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Catalogue IEC - webstore.iec.ch/catalogue

Application autonome pour consulter tous les renseignements bibliographiques sur les Normes internationales, Spécifications techniques, Rapports techniques et autres documents de l'IEC. Disponible pour PC, Mac OS, tablettes Android et iPad.

Recherche de publications IEC - www.iec.ch/searchpub

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans 15 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

Plus de 60 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Digital load side transmission lighting control (DLT) –
Part 1: Basic requirements**
(standards.iteh.ai)

**Commande d'éclairage par transmission numérique côté charge (DLT) –
Partie 1: Exigences de base**
IEC 62756-1:2015

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 29.140.99

ISBN 978-2-8322-3038-1

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD.....	5
INTRODUCTION.....	7
1 Scope.....	8
2 Normative references	8
3 Terms and definitions	8
4 General description	10
4.1 General.....	10
4.2 Master-slave structure	10
4.3 Specification overview	10
5 General requirements	10
5.1 Voltage rating	10
5.2 Frequency rating.....	11
5.3 Marking of control devices and control gear	11
6 Electrical specification.....	11
6.1 General.....	11
6.2 Wiring method.....	12
6.3 Wiring diagram.....	12
6.4 Block diagram of the control gear.....	12
6.5 Block diagram of the control device.....	13
6.6 Electrical characteristics in different periods of the mains waveform	13
6.6.1 General	13
6.6.2 Separation of the half-wave into time periods	14
6.6.3 Electrical characteristics of the supply period	14
6.6.4 Electrical characteristics of the operating period.....	19
6.6.5 Electrical characteristics of the data period.....	19
6.7 Data signal voltage range and timing	23
6.8 Power up timing.....	23
6.9 Electrical characteristics during the off state of control gear.....	24
6.9.1 General	24
6.9.2 Power controlled off state	24
6.9.3 Telegram controlled off state	25
7 Data timing.....	25
7.1 General.....	25
7.2 Information bit timing	25
7.3 Permissible frames	25
8 Telegram structure	26
8.1 General.....	26
8.2 Telegrams.....	27
8.2.1 General	27
8.2.2 Group number	27
8.2.3 Telegram type	27
8.2.4 Parity bit.....	27
8.2.5 Data for control of the control gear	27
9 Definition of telegram types	27
9.1 Summary of telegram types	27

9.2	Telegram type 0: Brightness	28
9.3	Telegram type 1: Colour control	28
9.4	Telegram type 2: Colour temperature control	29
9.5	Telegram type 3	29
9.6	Telegram type 4	29
9.7	Telegram type 5: commissioning: Group number assignment	29
9.8	Telegram type 6: Manufacturer specific	30
9.9	Telegram type 7: extended telegram	30
10	Method of operation	30
10.1	General	30
10.2	Brightness	31
10.2.1	General	31
10.2.2	Response time	31
10.2.3	Light output level	31
10.2.4	Start-up	31
10.3	Colour control	31
10.3.1	General	31
10.3.2	Colour (x, y)	31
10.3.3	Response time	32
10.3.4	Colour gamut	32
10.3.5	Start-up	32
10.4	Colour temperature control	33
10.4.1	General	33
10.4.2	CCT (correlated colour temperature)	33
10.4.3	Response time	33
10.4.4	Start-up	33
10.5	Telegram controlled group number assignment	33
10.6	Manufacturer specific telegram	34
11	Test procedures	34
11.1	General	34
11.2	Electrical characteristics tests	35
11.2.1	General	35
11.2.2	Test of control device	35
11.2.3	Test of control gear	38
11.3	Test of data timing	41
11.4	Test of telegram structure	41
11.4.1	Test of control device	41
11.4.2	Test of control gear	41
11.5	Test of telegram types	42
11.5.1	General	42
11.5.2	Rejection of unsupported telegram types	42
11.5.3	Test of telegram type 0: brightness	42
11.5.4	Test of telegram type 1: colour control	42
11.5.5	Test of telegram type 2: colour temperature control	43
11.5.6	Test of telegram type 5: commissioning	43
11.5.7	Test of telegram type 6: manufacturer specific	43
11.6	Test of method of operation	43
11.6.1	General	43
11.6.2	Group number operation	43

Annex A (informative) Examples of procedures for telegram controlled group number commissioning	47
A.1 Telegram controlled group number assignment of a new system	47
A.2 Telegram controlled group number assignment of replacement control gear	47
A.3 Telegram controlled changing of group numbers	48
Figure 1 – Example wiring diagram	12
Figure 2 – Example of block diagram of control gear	13
Figure 3 – Example of block diagram of control device	13
Figure 4 – Time periods of each half-wave	14
Figure 5 – Timing of supply period	15
Figure 6 – Timing data period	20
Figure 7 – Rise time and fall time at the control interface	23
Figure 8 – Transmission of “start of telegram”	25
Figure 9 – Transmission of first bit 0, second bit 0	25
Figure 10 – Transmission of first bit 0, second bit 1	26
Figure 11 – Transmission of first bit 1, second bit 0	26
Figure 12 – Transmission of first bit 1, second bit 1	26
Figure 13 – Brightness telegram	28
Figure 14 – Colour control telegram	28
Figure 15 – Colour temperature telegram	29
Figure 16 – Group number assignment telegram	29
Figure 17 – Manufacturer specific telegram	30
Figure 18 – The CIE 1931 colour space chromaticity diagram	32
Figure 19 – Test Circuit for testing the Control Device	35
Figure 20 – Test Circuit for testing the Control Gear	38
Figure 21 – Voltage applied to control gear for test procedure	39
Table 1 – Nominal mains voltage 100 V, frequency 50 Hz or 60 Hz	17
Table 2 – Nominal mains voltage 120 V; frequency 50 Hz or 60 Hz	17
Table 3 – Nominal mains voltage 200 V; frequency 50 Hz or 60 Hz	18
Table 4 – Nominal mains voltage 230 V; frequency 50 Hz or 60 Hz	18
Table 5 – Nominal mains voltage 277 V; frequency 50 Hz or 60 Hz	19
Table 6 – Nominal mains voltage 100 V; frequency 50 Hz or 60 Hz	21
Table 7 – Nominal mains voltage 120 V; frequency 50 Hz or 60 Hz	21
Table 8 – Nominal mains voltage 200 V; frequency 50 Hz or 60 Hz	21
Table 9 – Nominal mains voltage 230 V; frequency 50 Hz or 60 Hz	22
Table 10 – Nominal mains voltage 277 V; frequency 50 Hz or 60 Hz	22
Table 11 – Electrical characteristics of the data signal	23
Table 12 – Currents and Voltages for control gear during the power controlled off state	24
Table 13 – Telegram types	28
Table 14 – Dimming characteristic	31
Table 15 – Parameters for testing purposes	35
Table 16 – Group number test telegram sequence	44

INTERNATIONAL ELECTROTECHNICAL COMMISSION

DIGITAL LOAD SIDE TRANSMISSION LIGHTING CONTROL (DLT) –**Part 1: Basic requirements**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62756-1 has been prepared by subcommittee 34C: Auxiliaries for lamps, of IEC technical committee 34: Lamps and related equipment.

This bilingual version (2015-12) corresponds to the English version, published in 2015-05.

The text of this standard is based on the following documents:

CDV	Report on voting
34C/1054/CDV	34C/1081B/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

The French version of this standard has not been voted upon.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62756 series, published under the general title *Digital load side transmission lighting control (DLT)*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[IEC 62756-1:2015](https://standards.iteh.ai/catalog/standards/sist/50fa5312-50da-4495-a3e9-7999ba8be304/iec-62756-1-2015)

<https://standards.iteh.ai/catalog/standards/sist/50fa5312-50da-4495-a3e9-7999ba8be304/iec-62756-1-2015>

INTRODUCTION

This standard concerning Digital Load Side Transmission Lighting Control (DLT) describes a protocol for simple control of brightness, colour, colour temperature, and other parameters for the purpose of controlling lighting sources such as CFLi, LED light engines, electronic control gear and any other light source with integrated or external control gear.

This protocol uses existing wiring and allows easy retrofit of standard switches, dimmers and lamps with the new devices described in this standard, with little or no configuration.

The following standards contain safety requirements for control devices and control gear:

- IEC 60669-2-1, *Switches for household and similar fixed electrical installations – Part 2-1: Particular requirements – Electronic switches*,
- IEC 61347, *Lamp control gear*,
- IEC 60968, *Self-ballasted lamps for general lighting services – Safety requirements*,
- IEC 62560, *Self-ballasted LED-lamps for general lighting services by voltage > 50 V – Safety specifications*.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[IEC 62756-1:2015](https://standards.iteh.ai/catalog/standards/sist/50fa5312-50da-4495-a3e9-7999ba8be304/iec-62756-1-2015)

<https://standards.iteh.ai/catalog/standards/sist/50fa5312-50da-4495-a3e9-7999ba8be304/iec-62756-1-2015>

DIGITAL LOAD SIDE TRANSMISSION LIGHTING CONTROL (DLT) –

Part 1: Basic requirements

1 Scope

This International Standard specifies a protocol, electrical interface and test procedures for control of electronic lighting equipment by digital signals over the load side mains wiring.

Safety requirements are not covered by this standard.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60364 (all parts), *Low-voltage electrical installations*

IEC 60038, *IEC standard voltages*

3 Terms and definitions

[IEC 62756-1:2015](https://standards.iteh.ai/catalog/standards/sist/50fa5312-50da-4495-a3e9-97eaf4101000/iec-62756-1-2015)

<https://standards.iteh.ai/catalog/standards/sist/50fa5312-50da-4495-a3e9-97eaf4101000/iec-62756-1-2015>

For the purposes of this document, the following terms and definitions apply.

3.1

load side

wire from the output of the control device to the supply input of one or more control gear

3.2

interface

wires used for both supply of AC mains power and data transfer

3.3

control device

device that is connected to the interface and sends commands to at least one control gear

[SOURCE: IEC 62386-101:2009, 3.1, modified — "in order to control other devices (for example lamp control gear) connected to the same interface" has been replaced by "to at least one control gear"]

3.4

control gear

one or more components between the supply and one or more lamps which may serve to transform the supply voltage, limit the current of the lamp(s) to the required value, provide starting voltage and preheating current, prevent cold starting, correct power factor or reduce radio interference.

Note 1 to entry: Lamps may have an integrated control gear such as an integrated compact fluorescent lamp or integrated LED lamp. Any references to control gear will include any such integrated lamps.

[SOURCE: IEC 62386-101:2009, 3.2]

3.5**master**

device that initiates transmission of data on the interface

3.6**slave**

device that reacts to data on the interface

3.7**supply period**

time period during which power is supplied to a control device

3.8**operating period**

time period during which power is supplied to a control gear

3.9**data period**

time period during which data is transmitted

3.10**brightness**

lumen output of the light source

3.11**frame**

sequence of consecutive bits

iTeh STANDARD PREVIEW
(standards.iteh.ai)

3.12**telegram**

complete sequence of consecutive frames causing a reaction in the slave

[IEC 62756-1:2015](https://standards.iteh.ai/catalog/standards/sist/50fa5312-50da-4495-a3e9-7999ba8be304/iec-62756-1-2015)

<https://standards.iteh.ai/catalog/standards/sist/50fa5312-50da-4495-a3e9-7999ba8be304/iec-62756-1-2015>

3.13**group number**

number used to address a collection of control gear

3.14**response time**

time taken from the end of a telegram to the reaction of a control gear

3.15**half wave**

positive or negative 180° of an a.c. sine wave starting and ending at the zero crossing point

3.16**lighting system**

combination of a control device and one or more control gear

3.17**telegram type**

specific content of the telegram defining the message transmitted

3.18**two-wire device**

control device where the current for the internal power supply flows through the control gear

3.19**three-wire device**

control device where the current for the internal power supply is supplied directly from the mains

3.20**transmission signal**

difference of the voltage across the control device between logical states during the data period

3.21**start-up**

transition from zero light output to a state with greater than zero light output

4 General description**4.1 General**

The standardization of the control protocol for control of electronic lighting equipment by load side digital signals is intended to achieve multi-vendor interoperability between control devices and control gear, including but not limited to: CFL integrated lamps, LED integrated lamps and light sources with external control gear.

4.2 Master-slave structure

The control gear operates in slave mode only. Consequently the control gear receives information only.

The control device operates in master mode only. Consequently the control device transmits information only.

NOTE Bi-directional communication could be introduced in future parts or editions of this standard.

4.3 Specification overview

Below is a list of key capabilities of this protocol:

- Only one control device on the interface operates as a master.
- The control gear operates as a slave.
- The maximum number of control gear on one interface is limited only by the capabilities of the control device.
- The capabilities of a control device include the maximum permissible power of total connected control gear and the maximum permissible number of connected control gear.
- The maximum number of individual groups addressable on one interface is three.
- Bi-phase coding (Manchester coding) with error detection.
- Effective transmission rate: 200 bit/s at 50 Hz and 240 bit/s at 60 Hz.
- Compatible with mains voltages 100 V to 277 V.
- Supply of power to two-wire control devices is provided.

5 General requirements**5.1 Voltage rating**

This standard applies to one or more of the following mains voltages: 100 V, 120 V, 200 V, 230 V, 277 V, according to IEC 60038.

5.2 Frequency rating

This standard applies to one or more of the following mains frequencies: 50 Hz, 60 Hz, according to IEC 60038.

5.3 Marking of control devices and control gear

The following information shall be provided by the manufacturer.

Supported telegram types.

Indication if a control gear does not support group number assignment.

Factory assigned group number for control gear with a fixed factory group assignment other than group 0.

Maximum number of group number assignments for control gear with limited number of group number assignments.

Required minimum number of connected control gear for control devices requiring more than one control gear to be connected.

NOTE Two-wire control devices could need a supply current that exceeds the current-carrying capability provided by a single control gear.

ITeH STANDARD PREVIEW

6 Electrical specification (standards.iteh.ai)

6.1 General

IEC 62756-1:2015

To describe the electrical characteristics of the interface, the following abbreviations are used:

V_M	Mains voltage (rated nominal value)
$V_M(t)$	Instantaneous value of V_M
V_{Pk}	Peak voltage of V_M
V_{CD}	Voltage between the line side (L) and load side terminals of the control device (see Figure 1)
I_{CD}	Current through the load side terminal of the control device (see Figure 1)
Z_{CD}	Impedance between the line side (L) and load side terminals of the control device
V_{CG}	Voltage across the input terminals of the control gear (see Figure 1)
I_{CG}	Current through the input terminals of the control gear (see Figure 1)
Z_{CG}	Impedance across the input terminals of the control gear
P_{CG}	Rated input power of the control gear
n	Number of control gear connected with one control device
V_{SW}	Voltage across the input terminals of the control gear at the time that leads to disabling (supply period) or enabling (data period) the bypass
V_{Data}	Voltage between the line side (L) and load side terminals of the control device during the data period (see 6.7)
V_{TS}	Transmission voltage, difference of the voltage between the line side (L) and load side terminals of the control device between logical states; signal amplitude of the transmission signal
V_{CDmin}	Voltage between the line side (L) and load side terminals of the control device when its impedance Z_{CD} is minimal

I_{CG_LC}	Current-carrying capability of the control gear during the low current intervals and the data period
I_{CG_HC}	Current-carrying capability of the control gear during the high current interval
V_{CG_HC}	Maximum value for V_{CG} during the high current phase with $I_{CG} = I_{CG_HC}$
I_{CD_HC}	Limit for current I_{CD} during the high current interval, defined by the control device
t_{HB}	Period time of one half-bit (see Figure 7)
t_{rise}	Time needed to increase the voltage between the line side (L) and load side terminals of the control device (V_{Data}) from $V_{CDmin} + 0,1 \times V_{TS}$ to $V_{CDmin} + 0,9 \times V_{TS}$
t_{fall}	Time needed to decrease the voltage between the line side (L) and load side terminals of the control device (V_{Data}) from $V_{CDmin} + 0,9 \times V_{TS}$ to $V_{CDmin} + 0,1 \times V_{TS}$
t_{CD_S}	Time after zero crossing when the control device stops applying voltage to the control gear
I_{PO_low}	Lower most level for current carrying capability of the control gear during power controlled off state
I_{PO_high}	Upper most level for current carrying capability of the control gear during power controlled off state
V_{PO_low}	Lower limit for voltage across the input terminals of the control gear to provide a current carrying capability I_{PO_low} during power controlled off state
V_{PO_high}	Upper limit for voltage across the input terminals of the control gear to provide a current carrying capability I_{PO_high} during power controlled off state

iTech STANDARD PREVIEW
(standards.itech.ai)

6.2 Wiring method


The wiring of the devices is in accordance with the installation rules given in the IEC 60364 series, and also with the national wiring rules applicable in the country where the devices are installed.

[IEC 62756-1:2015](https://standards.itech.ai/catalog/standards/sist/50fa5312-50da-4495-a3e9-7999ba8be304/iec-62756-1-2015)

<https://standards.itech.ai/catalog/standards/sist/50fa5312-50da-4495-a3e9-7999ba8be304/iec-62756-1-2015>

6.3 Wiring diagram

The wiring of the lighting system uses the traditional method of breaking the control device into the mains connection to the control gear. Figure 1 is an example of a lighting system with one control device and one or two control gear.

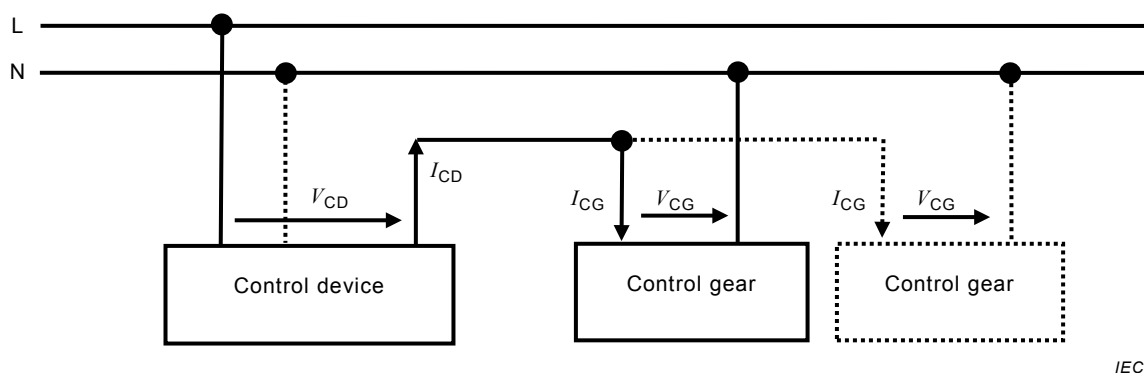

IEC

Figure 1 – Example wiring diagram

6.4 Block diagram of the control gear

For the DLT function, in addition to the parts usually used in a control gear, the following may be required (see Figure 2):

- a rectifier unit for rectifying the mains voltage;
- a bypass that is able to carry specified currents as defined for different periods;

- a decoupling unit that decouples the transmitted data from the mains and forwards the transmission signal to a processing unit;
- a processing unit that acts on the received telegram to drive the lamp controller;
- a lamp controller to supply light emitting elements, such as low pressure discharge lamps or LEDs;
- a decoupling diode if the input capacitance of the lamp controller would disturb the reception of the transmission signal.

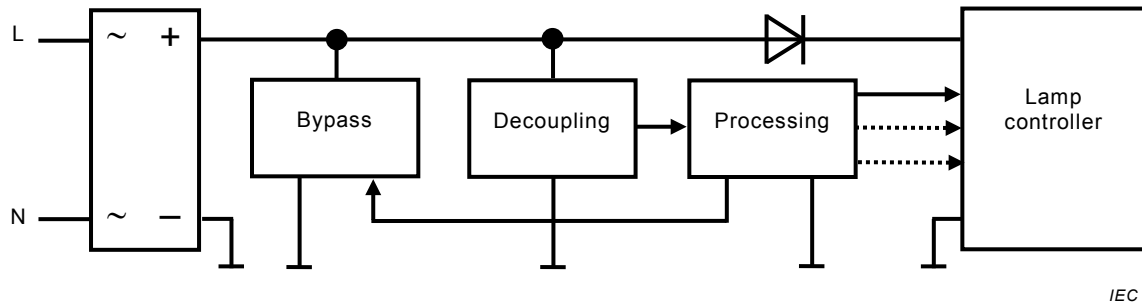


Figure 2 – Example of block diagram of control gear

6.5 Block diagram of the control device

A control device (see Figure 3) comprises an electronic power switch with integrated logic and zero crossing detection to control the supply period, the operating period and the data period. For proper operation, a power supply with an integrated current limiter is necessary for driving the circuitry of the control device. The power required by the control device depends on the design of the user interface.

IEC 62756-1:2015

A data modulator provides the data for the control gear.

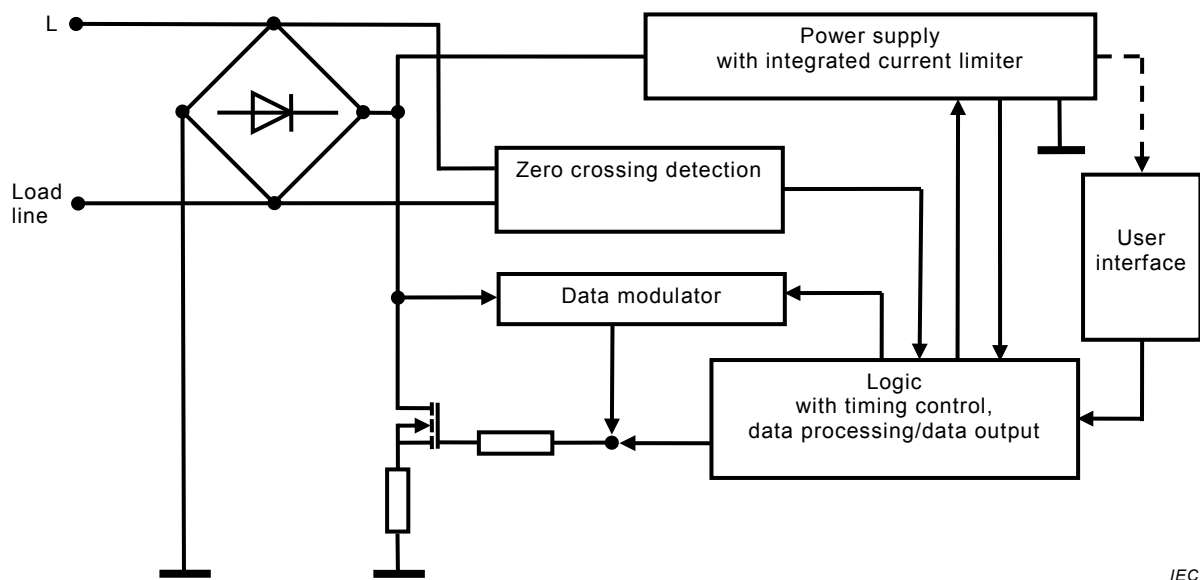


Figure 3 – Example of block diagram of control device

6.6 Electrical characteristics in different periods of the mains waveform

6.6.1 General

All values in this subclause are relevant for both 2-wire and 3-wire control devices.