

INTERNATIONAL STANDARD

Liquid crystal display devices –
Part 10-2: Environmental, endurance and mechanical test methods –
Environmental and endurance
STANDARD PREVIEW
(standards.iteh.ai)

[IEC 61747-10-2:2014](https://standards.iteh.ai/catalog/standards/sist/eb037877-3116-46d8-9617-d9eccf4e065d/iec-61747-10-2-2014)

<https://standards.iteh.ai/catalog/standards/sist/eb037877-3116-46d8-9617-d9eccf4e065d/iec-61747-10-2-2014>



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2014 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email. <https://standards.iteh.ai/catalog/standards/sist/9617-d9ecc4e065d/iec-61777-10-2-2014>

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in 14 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

More than 55 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch

IEC'S STANDARD PREVIEW
(standards.iteh.ai)
9617-d9ecc4e065d/iec-61777-10-2-2014



IEC 61747-10-2

Edition 1.0 2014-09

INTERNATIONAL STANDARD

**Liquid crystal display devices –
Part 10-2: Environmental, endurance and mechanical test methods –
Environmental and endurance**

STANDARD PREVIEW
(standards.iteh.ai)
<https://standards.iteh.ai/catalog/standards/sist/eb037877-3116-46d8-9617-d9eccf4e065d/iec-61747-10-2-2014>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE



ICS 31.120

ISBN 978-2-8322-1846-4

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	3
1 Scope	5
2 Normative references	5
3 Terms, definitions and symbols	6
4 Standard atmospheric conditions for measurements and tests:	6
5 Test methods	6
5.1 General	6
5.2 Rapid change of temperature: two-chamber method	6
5.3 Specified change rate of temperature: one-chamber method	8
5.4 Storage (at high temperature)	9
5.5 Storage (at low temperature)	10
5.6 Low air pressure	11
5.7 Damp heat, steady state	11
5.8 Damp heat, cyclic (12+12-hour cycle)	12
5.9 Composite temperature/humidity cyclic test	12
5.10 Light exposure	15
5.10.1 Simulated solar radiation at ground level	15
5.10.2 Simulated indoor daylight through window glass	15
5.10.3 Other radiation	16
5.11 ESD Test	16
Bibliography	17
Figure 1 – Temperature profile	7
Figure 2 – Temperature profile	9
Figure 3 – Preconditioning	13
Figure 4 – Conditioning – Exposure to humidity followed by exposure to cold	14
Figure 5 – Conditioning – Exposure to humidity not followed by exposure to cold	15
Table 1 – Low test temperature	6
Table 2 – High test temperature	7
Table 3 – Low test temperature	8
Table 4 – High test temperature	8
Table 5 – Conditions of temperature and humidity	11

iTech STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/eb037877-3116-46d8-9617-d9eccf4e065d/iec-61747-10-2-2014>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

LIQUID CRYSTAL DISPLAY DEVICES –

**Part 10-2: Environmental, endurance and mechanical test methods –
Environmental and endurance**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61747-10-2 has been prepared by IEC technical committee 110: Electronic display devices.

This first edition of IEC 61747-10-2 cancels and replaces Clauses 1 and 3 of the first edition of IEC 61747-5 published in 1998. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) Examples of the test conditions have been added to each test method;
- b) References cited have been updated.

The text of this standard is based on the following documents:

CDV	Report on voting
110/528/CDV	110/575A/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61747 series, published under the general title *Liquid crystal display devices*, can be found on the IEC website.

NOTE It is intended that the other clauses of IEC 61747-5:1998 will be replaced by new parts in the IEC 61747 series. The details of the intended changes are given in Annex D of IEC 61747-30-1:2012.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

iTeh STANDARD PREVIEW

A bilingual version of this publication (standards.iteh.ai) may be issued at a later date.

IEC 61747-10-2:2014

<https://standards.iteh.ai/catalog/standards/sist/eb037877-3116-46d8-9617-d9eccf4e065d/iec-61747-10-2-2014>

LIQUID CRYSTAL DISPLAY DEVICES –

Part 10-2: Environmental, endurance and mechanical test methods – Environmental and endurance

1 Scope and object

This part of IEC 61747 lists test methods applicable to liquid crystal display devices. It takes into account, wherever possible, the environmental test methods outlined in IEC 60068.

NOTE Devices include cells and modules.

The object of this standard is to establish uniform preferred test methods with preferred values for stress levels for judging the environmental properties of liquid crystal display devices.

In case of contradiction between this standard and a relevant specification, the latter should govern.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60068 (all parts), *Environmental testing*

IEC 60068-2-1, *Environmental testing – Part 2-1: Tests – Test A: Cold*

IEC 60068-2-2, *Environmental testing – Part 2-2: Tests – Test B: Dry heat*

IEC 60068-2-5, *Environmental testing – Part 2-5: Tests – Test Sa: Simulated solar radiation at ground level and guidance for solar radiation testing*

IEC 60068-2-13, *Basic environmental testing procedures – Part 2-13: Tests – Test M: Low air pressure*

IEC 60068-2-14:1984, *Environmental testing – Part 2-14: Tests – Test N: Change of temperature*

IEC 60068-2-30, *Environmental testing – Part 2-30: Tests – Test Db: Damp heat, cyclic (12 h + 12 h cycle)*

IEC 60068-2-38:2009, *Environmental testing – Part 2-38: Tests – Test Z/AD: Composite temperature/humidity cyclic test*

IEC 60068-2-78, *Environmental testing – Part 2-78: Tests – Test Cab: Damp heat, steady state*

IEC 60747 (all parts), *Semiconductor devices*

IEC 60747-1, *Semiconductor devices – Part 1: General*

IEC 60748-1, *Semiconductor devices – Integrated circuits – Part 1: General*

ISO 18909:2006, *Photography – Processed photographic colour films and paper prints – Methods for measuring image stability*

3 Terms, definitions and symbols

For the purposes of this standard, the terms, definitions and symbols given in IEC 60068, IEC 60747, IEC 60748-1 and IEC 61747-1 apply.

4 Standard atmospheric conditions for measurements and tests:

Unless otherwise specified, all tests and measurements shall be carried out under standard atmospheric conditions for testing:

Temperature: 15 °C to 35 °C

Relative humidity: 25 % to 85 % RH, where appropriate

Air pressure: 86 kPa to 106 kPa (860 mbar to 1 060 mbar)

The absolute humidity of the atmosphere shall not exceed 22 g/m³.

5 Test methods

5.1 General

The choice of the appropriate tests depends on the type of devices. The relevant specification shall state which tests are applicable. Regarding the change of temperature, test Na, specified in IEC 60068-2-14, is applicable.

5.2 Rapid change of temperature: two-chamber method

This test shall be in accordance with test Na, with the following specific requirements:

- the absolute humidity of the atmosphere shall not exceed 20 g/m³;
- the lower temperature T_A shall be specified in the relevant specification and shall be chosen from the test temperature of Table 1;
- the higher temperature T_B shall be specified in the relevant specification and shall be chosen from the test temperature of Table 2;


Table 1 – Low test temperature

Low temperature T_A		
°C		
–50 ± 3	–30 ± 3	–10 ± 3
–45 ± 3	–25 ± 3	–5 ± 3
–40 ± 3	–20 ± 3	0 ± 3
–35 ± 3	–15 ± 3	

Table 2 – High test temperature

High temperature T_B		
°C		
+100 ± 2	+75 ± 2	+50 ± 2
+95 ± 2	+70 ± 2	+45 ± 2
+90 ± 2	+65 ± 2	+40 ± 2
+85 ± 2	+60 ± 2	+35 ± 2
+80 ± 2	+55 ± 2	+30 ± 2

- the exposure time t_1 of each of the two temperatures depends upon the thermal capacity of the device. It shall be 3 h, 2 h, 1 h, 30 min or 10 min as specified in the relevant specification. Where no exposure period is prescribed in the relevant specification it is understood to be 3 h;
- t_2 is the time from unloading from one chamber to loading to the other chamber. The transition time should be:
 - 2 min to 3 min;
 - 20 s to 30 s;
 - less than 10 s;
- the first cycle comprises the two exposure times t_1 and the two transition times t_2 (see Figure 1);
- the number of cycles shall be 5, 10, 50, 100, 200 unless otherwise specified in the relevant specification;
- initial measurements:
 - an external visual examination;
 - mechanical, electrical and optical tests: as given in the relevant specification;
- final measurements:
 - an external visual examination;
 - mechanical, electrical, and optical tests: as specified at the initial measurements and in the relevant specification.

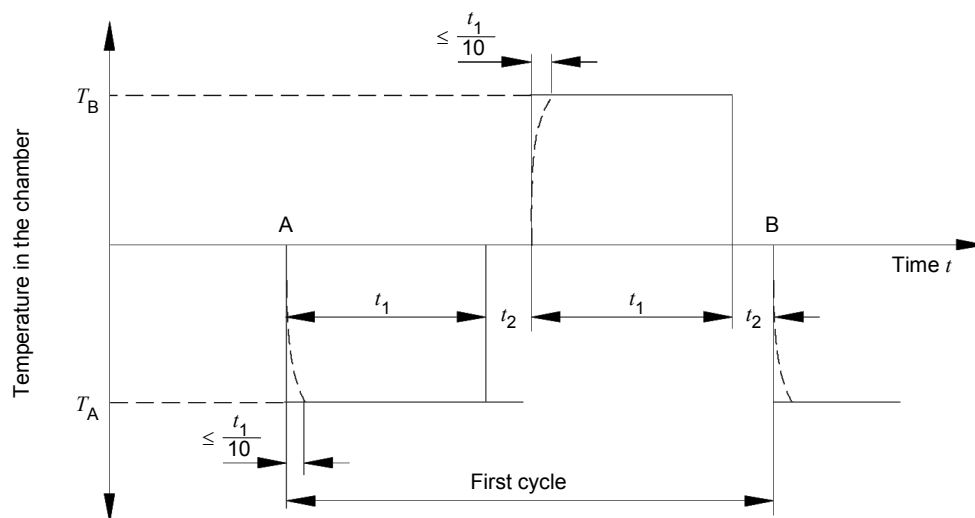

A = start of first cycle

B = end of first cycle and start of second cycle

NOTE The dotted curve is explained in 1.3.1.5 of IEC 60068-2-14:1984.

Figure 1 – Temperature profile for the two-chamber method

Example test conditions (for thermal shock test):

$T_a = -40\text{ °C}$, $T_b = +85\text{ °C}$, $t_1 = 30\text{ min}$, $t_2 = 3\text{ min}$, 50 cycles

$T_a = -40\text{ °C}$, $T_b = +85\text{ °C}$, $t_1 = 30\text{ min}$, $t_2 = 3\text{ min}$, 100 cycles

$T_a = -30\text{ °C}$, $T_b = +80\text{ °C}$, $t_1 = 30\text{ min}$, $t_2 = 3\text{ min}$, 100 cycles

5.3 Specified change rate of temperature: one-chamber method

This test shall be in accordance with test Nb, with the following specific requirements:

- the absolute humidity of the atmosphere shall not exceed 20 g/m^3 ;
- the lower temperature T_A shall be specified in the relevant specification and shall be chosen from the test temperature of Table 3;
- the higher temperature T_B shall be specified in the relevant specification and shall be chosen from the test temperature of Table 4;

Table 3 – Low test temperature

Low temperature T_A		
°C		
-50 ± 3	-30 ± 3	-10 ± 3
-45 ± 3	-25 ± 3	-5 ± 3
-40 ± 3	-20 ± 3	0 ± 3
-35 ± 3	-15 ± 3	

iTeh STANDARD PREVIEW
(standards.iteh.ai)


<https://standards.iteh.ai/catalog/standards/sist/eb037877-3116-46d8-9617-49cc40c9d1cc/iec-61747-10-2-2014>

Table 4 – High test temperature

High temperature T_B		
°C		
$+100 \pm 2$	$+75 \pm 2$	$+50 \pm 2$
$+95 \pm 2$	$+70 \pm 2$	$+45 \pm 2$
$+90 \pm 2$	$+65 \pm 2$	$+40 \pm 2$
$+85 \pm 2$	$+60 \pm 2$	$+35 \pm 2$
$+80 \pm 2$	$+55 \pm 2$	$+30 \pm 2$

- the exposure time t_1 of each of the two temperatures depends upon the heat capacity of the device. It shall be 3 h, 2 h, 1 h, 30 min or 10 min, as specified in the relevant specification. Where no exposure period is prescribed in the relevant specification it is understood to be 3 h;
- the following procedure constitutes one cycle (see Figure 2); the temperature of the chamber shall be lowered or raised at a rate which, averaged over a period of not more than 5 min, is either $(1 \pm 0,2)\text{ °C/min}$, $(3 \pm 0,6)\text{ °C/min}$ or $(5 \pm 1)\text{ °C/min}$, unless otherwise specified in the relevant specification;
- the number of cycles shall be 2, unless otherwise specified in the relevant specification;
- initial measurements:
 - an external visual examination;
 - mechanical, electrical and optical tests: as given in the relevant specification;
- final measurements:
 - an external visual examination;

mechanical, electrical and optical tests: as specified at the initial measurements and in the relevant specification.

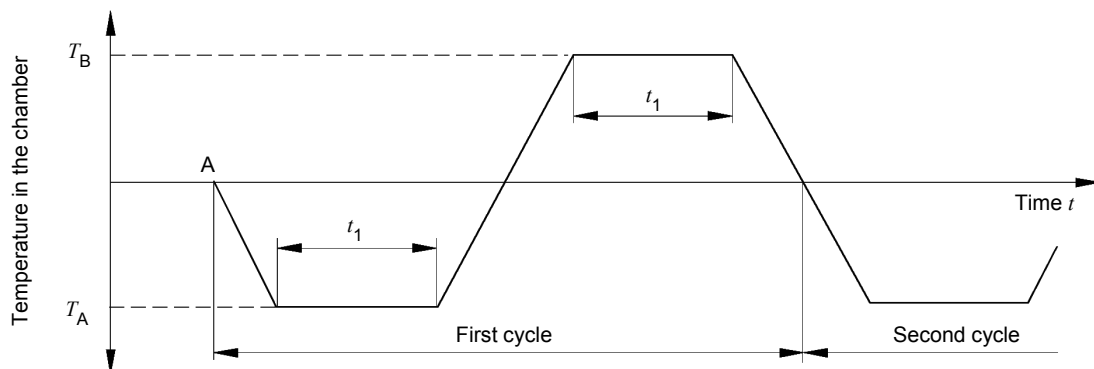

IEC

A = start of first cycle

Figure 2 – Temperature profile for the one-chamber method

5.4 Storage (at high temperature)

Test B, described in IEC 60068-2-2 is applicable.

This test shall be in accordance with test Bb, with the following specific requirements:

- the temperature shall be specified in the relevant specification. The values shall be selected from those given below:

- IEC 61747-10-2:2014*
<https://standards.iteh.ai/catalog/standards/sist/eb037877-3116-46d8-9617-d9eccf4e065d/iec-61747-10-2-2014>
- +100 °C ± 2 °C
 - +95 °C ± 2 °C
 - +90 °C ± 2 °C
 - +85 °C ± 2 °C
 - +80 °C ± 2 °C
 - +75 °C ± 2 °C
 - +70 °C ± 2 °C
 - +65 °C ± 2 °C
 - +60 °C ± 2 °C
 - +55 °C ± 2 °C
 - +50 °C ± 2 °C
 - +45 °C ± 2 °C
 - +40 °C ± 2 °C
 - +35 °C ± 2 °C
 - +30 °C ± 2 °C

- the duration shall be selected from the values given below, as specified in the relevant specification:

- 2 h
- 16 h
- 24 h
- 48 h
- 72 h