

INTERNATIONAL STANDARD



**Maritime navigation and radiocommunication equipment and systems –
Presentation of navigation-related information on shipborne navigational
displays – General requirements, methods of testing and required test results**

Document Preview

IEC 62288:2014

<https://standards.iteh.ai/en/standards/iec/2eb38150-18da-4cf0-a9e8-17b5861ae741/iec-62288-2014>

WITHDRAWN



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2014 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in 14 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

More than 55 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

IEC 62288:2014

<https://standards.iteh.ai/catalog/standards/iec/2eb38150-18da-4cf0-a9e8-17b5861ae741/iec-62288-2014>

INTERNATIONAL STANDARD



**Maritime navigation and radiocommunication equipment and systems –
Presentation of navigation-related information on shipborne navigational
displays – General requirements, methods of testing and required test results**

<https://standards.iteh.ai/catalog/standards/iec/2eb38150-18da-4cf0-a9e8-17b5861ae741/iec-62288-2014>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE

XF

ICS 47.020.70

ISBN 978-2-8322-1688-0

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS


FOREWORD.....	7
1 Scope.....	9
2 Normative references	9
3 Terms and definitions	10
4 General requirements for all displays on the bridge of a ship	15
4.1 Relationship to IMO standards	15
4.2 Application of IEC 60945.....	16
4.2.1 Remark.....	16
4.2.2 General requirements	16
4.3 Arrangement of information.....	16
4.3.1 Consistency of layout	16
4.3.2 Consistent presentation of information.....	17
4.3.3 Separation of operational display area.....	17
4.4 Readability.....	17
4.4.1 Readability under all ambient light conditions	17
4.4.2 Legibility of alphanumeric data and text.....	19
4.4.3 Presentation of text	20
4.4.4 Icons	20
4.5 Colours and intensity	21
4.5.1 Discrimination of colours – Requirement.....	21
4.5.2 Methods of test and required results.....	21
4.6 Symbols.....	22
4.6.1 Operational information.....	22
4.6.2 Electronic chart information.....	22
4.7 Colour coding of information	23
4.7.1 Colour coding for discrimination.....	23
4.7.2 Colour coding of information.....	23
4.7.3 Colour coding in combination with other attributes	23
4.7.4 Flashing of information	24
4.8 Integrity marking.....	24
4.8.1 Indication of source, validity and integrity status.....	24
4.8.2 Colour coding of validity and integrity	24
4.8.3 Indication of presentation failure.....	25
4.9 Alerts and indications.....	25
4.9.1 Operational status	25
4.9.2 List of alerts.....	26
4.9.3 Alert related information from multiple sources	27
4.9.4 Speech output for alarms and warnings	27
4.10 Presentation mode.....	28
4.10.1 Requirement.....	28
4.10.2 Methods of test and required results.....	28
4.11 User manuals, instructions and reference guides	28
4.11.1 Requirement.....	28
4.11.2 Methods of test and required results.....	29
5 Presentation of operational information	29
5.1 Application.....	29

5.2	Presentation of own ship information	29
5.2.1	Graphical representation of own ship – Requirement	29
5.2.2	Methods of test and required results	29
5.3	Presentation of chart information	30
5.3.1	Alteration of chart information	30
5.3.2	Colours and symbols for charted information	30
5.4	Presentation of radar information	31
5.4.1	Radar video images	31
5.4.2	Target trails	32
5.5	Presentation of target information	32
5.5.1	Providing target information	32
5.5.2	Consistent user interface for target information	33
5.5.3	Indication of exceeding target capacity	33
5.5.4	Merging AIS targets from multiple source	33
5.5.5	Filtering sleeping AIS targets	34
5.5.6	Activation of AIS targets	35
5.5.7	Graphical presentation of targets	35
5.5.8	Target selection	37
5.5.9	Indication of target derivation	37
5.5.10	Presentation of tracked radar target information	37
5.5.11	Presentation of reported AIS target information	38
5.5.12	Continual update of target information	39
5.5.13	Own ship's AIS information	39
5.5.14	Obscuring the operational display area	39
5.6	Operational alerts	39
5.6.1	Alert status	39
5.6.2	CPA/TCPA alarms	40
5.6.3	Acquisition/activation zones warnings	40
5.6.4	Lost target warnings	41
5.7	AIS and radar target association	41
5.7.1	Target association	41
5.7.2	AIS presentation status	42
5.7.3	Trial manoeuvre	43
5.8	Measurement	43
5.8.1	Measurement from own ship	43
5.8.2	Bearing and range measurements	44
5.9	Navigation tools	44
5.9.1	General requirements	44
5.9.2	Range rings	44
5.9.3	Variable range marker (VRM)	45
5.9.4	Bearing scale	46
5.9.5	Electronic bearing line (EBL)	46
5.9.6	Parallel index lines (PI)	47
5.9.7	Offset measurement of range and bearing	48
5.9.8	User cursor	49
6	Radar and chart displays	50
6.1	General	50
6.1.1	Application	50
6.1.2	Multifunction displays	50

6.1.3	Simultaneous display of radar and chart data	51
6.1.4	Range scales.....	51
6.1.5	Operational display area.....	51
6.1.6	Motion display modes	52
6.1.7	Orientation modes	52
6.1.8	Off-centring	53
6.1.9	Stabilisation modes	53
6.2	Radar displays.....	54
6.2.1	Application.....	54
6.2.2	Radar video image.....	54
6.2.3	Brightness of radar information.....	54
6.2.4	Display of chart information on radar	55
6.2.5	Priority of radar information	56
6.2.6	Display of map graphics	56
6.3	Chart displays.....	57
6.3.1	Application.....	57
6.3.2	Display of chart information	57
6.3.3	IMO ECDIS display categories.....	57
6.3.4	Adding or removing information from the display.....	58
6.3.5	Safety contour	58
6.3.6	Safety depth	59
6.3.7	Chart scale.....	59
6.3.8	Display of radar and target information	59
6.3.9	Display of additional information.....	60
6.4	Composite task-oriented presentations	60
6.4.1	User-configured presentations.....	60
6.4.2	Information associated with the task-at-hand	61
7	Physical requirements	61
7.1	General.....	61
7.2	Display adjustment	61
7.2.1	Contrast and brightness.....	61
7.2.2	Magnetic interference	62
7.2.3	Temporal stability	62
7.2.4	Physical controls and status indicators	63
7.3	Screen size.....	63
7.3.1	Requirement.....	63
7.3.2	Method of test and required results.....	64
7.4	Multicoloured display equipment	64
7.4.1	Requirement.....	64
7.4.2	Method of test and required results.....	64
7.5	Screen resolution.....	64
7.5.1	Requirement.....	64
7.5.2	Method of test and required results.....	65
7.6	Screen viewing angle	65
7.6.1	Requirement.....	65
7.6.2	Methods of test and required results.....	65
Annex A (normative)	Presentation colours and symbols.....	66
A.1	Overview	66
A.2	Purpose.....	66

A.3	Scope	66
A.4	Application	66
A.5	Navigation-related symbols	66
Annex B (normative)	Guidelines for the presentation of navigation-related terminology and abbreviations	99
B.1	Overview	99
B.2	Purpose	99
B.3	Scope of these guidelines	99
B.4	Application	99
B.5	Navigation related terminology and abbreviations	99
Annex C (informative)	Guidance on display and dialogue design in MSC/Circ.982	106
C.1	Overview	106
C.2	General	106
C.3	Requirements in MSC/Circ.982 related to the display design	106
Annex D (informative)	Guidance on testing	108
D.1	Methods of test derived from ISO 9241-12	108
D.1.1	General	108
D.1.2	Observation	108
D.1.3	Inspection of documented evidence	108
D.1.4	Measurement	109
D.1.5	Analytical evaluation	109
D.2	Application of IEC 60945	109
D.2.1	Display equipment category	109
D.2.2	Technical performance	109
D.2.3	Pre-conditioning for environmental tests	110
D.2.4	Methods of test derived from ISO 9241-12 applied for IEC 60945	110
D.3	Compliance with requirements	112
D.4	Simulation	112
D.5	Electronic chart data	112
Annex E (normative)	Operational controls	113
E.1	Overview	113
E.2	Logical grouping of data and control functions	113
E.3	Icons for common function controls	114
Annex F (normative)	Icons for presentation of the state of an alert	117
Annex G (normative)	Testing for colours, intensity and flicker	119
G.1	Testing for colours and intensity	119
G.1.1	General	119
G.1.2	Test personnel	120
G.1.3	Method of test	120
G.2	Testing for flicker	121
G.2.1	Overview	121
G.2.2	Analytic model	121
G.2.3	Decision criteria	123
Bibliography	125
Table 1 – Ambient light conditions	18
Table 2 – Operational status	26
Table 3 – AIS status	42

Table A.1 – Own ship symbols	67
Table A.2 – Radar and AIS symbols	71
Table A.3 – Navigation symbols	84
Table A.4 – Navigation tools	91
Table A.5 – Other symbols	92
Table A.6 – Example of possible colour scheme	98
Table B.1 – List of standard terms and abbreviations	100
Table B.2 – List of standard units of measurement and abbreviations	105
Table C.1 – Paragraphs in MSC/Circ.982 associated with IEC 60945 requirements	106
Table C.2 – Other paragraphs in MSC/Circ.982 related to display design	107
Table C.3 – Other paragraphs in MSC/Circ.982 partially related to display design	107
Table D.1 – Methods of test applied for IEC 60945	110
Table E.1 – Top-level grouping of data and control functions for radar applications	114
Table E.2 – Top-level grouping of data and control functions for charting	114
Table E.3 – General control icons	115
Table E.4 – Task-oriented measurement control icons	115
Table E.5 – Radar specific control icons	116
Table F.1 – Alert management icons – basic	117
Table F.2 – Alert management icons – additional qualifiers	118
Table G.1 – Values of predicted energy and special coefficients	124

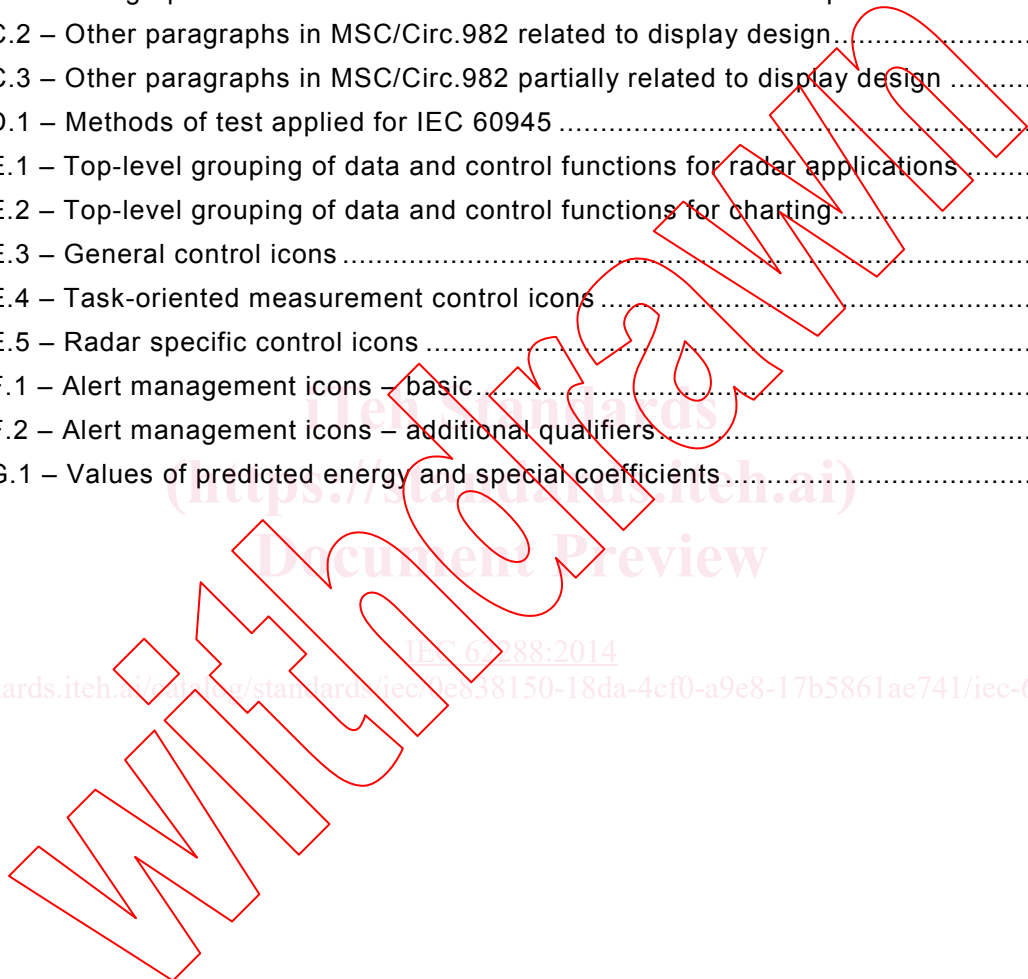

INTERNATIONAL ELECTROTECHNICAL COMMISSION

MARITIME NAVIGATION AND RADIOCOMMUNICATION EQUIPMENT AND SYSTEMS – PRESENTATION OF NAVIGATION-RELATED INFORMATION ON SHIPBORNE NAVIGATIONAL DISPLAYS – GENERAL REQUIREMENTS, METHODS OF TESTING AND REQUIRED TEST RESULTS

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62288 has been prepared by IEC technical committee 80: Maritime navigation and radiocommunication equipment and systems.

This standard supports the performance standards for the presentation of navigation-related information on shipborne navigational displays, adopted by the IMO in resolution MSC.191(79) in December 2004.

This second edition cancels and replaces the first edition published in 2008 and constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- References to IBS have been removed as IMO has revoked MSC.64(67) Annex 1:1996, Performance standards for integrated bridge systems (IBS).

- Subclause 4.9 (Alerts and indicators) has been revised to align the requirements with the IMO resolutions MSC.252(83), MSC.302(87) and A.1021(26) published since MSC.191(79), together with a new Annex F for alert related icons.
- Clause 5 (Presentation of operational information) has been revised with a new requirement added for merging AIS targets from multiple sources.
- Test methods have been reviewed and further guidance on testing added to Annex D. A new normative Annex G has been added for testing of colours, intensity and flicker.
- Annex A (Presentation of colours and symbols) has been revised with AIS AtoN symbols, AIS-SART symbol and wheel over position symbol redefined, and new symbols added for AIS SAR aircraft, AIS SAR vessel, MSI and AIS application specific messages.

The text of this standard is based on the following documents:

FDIS	Report on voting
80/733/FDIS	80/738/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

NOTE All text in this standard whose wording is identical to text contained in an IMO document is printed in *italics*. Reference to the document is noted at the beginning of the paragraph. The notation contains a prefix referring to the document and a suffix with the paragraph number from the document (for example, (MSC191/1); (SN243/1), etc.).

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

MARITIME NAVIGATION AND RADIOCOMMUNICATION EQUIPMENT AND SYSTEMS – PRESENTATION OF NAVIGATION-RELATED INFORMATION ON SHIPBORNE NAVIGATIONAL DISPLAYS – GENERAL REQUIREMENTS, METHODS OF TESTING AND REQUIRED TEST RESULTS

1 Scope

This International Standard specifies the general requirements, methods of testing, and required test results, for the presentation of navigation-related information on shipborne navigational displays in support of IMO resolutions MSC.191(79) and MSC.302(87).

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60945:2002, *Maritime navigation and radiocommunication equipment and systems – General requirements – Methods of testing and required test results*

IEC 61174, *Maritime navigation and radiocommunication equipment and systems – Electronic chart display and information system (ECDIS) – Operational and performance requirements, methods of testing and required test results*

IEC 61966-4, *Multimedia systems and equipment – Colour measurement and management – Part 4: Equipment using liquid crystal display panels*

IEC 62065, *Maritime navigation and radiocommunication equipment and systems – Track control systems – Operational and performance requirements, methods of testing and required test results*

IEC 62388, *Maritime navigation and radiocommunication equipment and systems – Shipborne radar – Performance requirements, methods of testing and required test results*

IHO S-52 *Specifications for chart content and display aspects of ECDIS*

IHO S-52 Annex A, *IHO ECDIS presentation library*

IMO A.694(17):1991, *General requirements for shipborne radio equipment forming part of the global maritime distress and safety system (GMDSS) and for electronic navigational aids*

IMO MSC.191(79):2004, *Performance standards for the presentation of navigation related information on shipborne navigational displays*

IMO MSC.192(79):2004, *Performance standards for radar equipment*

IMO MSC.232(82):2006, *Revised performance standards for electronic chart display and information systems (ECDIS)*

IMO SN.1/Circ.243/Rev.1:2014, *Guidelines for the presentation of navigation related symbols, terms and abbreviations*

IMO MSC.252(83):2007, *Performance standards for integrated navigation systems (INS)*

IMO MSC.302(87):2010, *Performance standards for bridge alert management (BAM)*

IMO A.1021(26):2009, *Code on Alerts and Indications*

VESA-2001-6, *Flat Panel Display Measurements (FPDM)*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

activated AIS target

(MSC191/A) *target activated for the display of additional graphically presented information*

EXAMPLE Heading line, velocity vector, etc.

3.2

automatic identification system

AIS

system which complies with the requirements set forth in Annex 3 to IMO Resolution MSC.74(69)

3.3

AIS target (or reported AIS target)

(MSC191/A) *target generated from an AIS message*

3.4

alarm

(MSC.302/A) *a high-priority alert. Condition requiring immediate attention and action by the bridge team, to maintain the safe navigation of the ship*

3.5

alert

(MSC.302/A) *announcement of abnormal situations and conditions requiring attention. Alerts are divided in four priorities: emergency alarms, alarms, warnings and cautions. An alert provides information about a defined state change in connection with information about how to announce this event in a defined way to the system and the operator*

3.6

associated target

(MSC191/A) *target simultaneously representing a tracked radar target and a reported AIS target having similar parameters (for example, position, course, speed, etc.) and which comply with an association algorithm*

3.7

brilliance

adjustment of luminance of a display for ambient light

EXAMPLE Control of backlight for LCD (liquid cristal display).

3.8

caution

(MSC.302/A) *lowest priority of an alert. Awareness of a condition which does not warrant an alarm or warning condition, but still requires attention out of the ordinary consideration of the situation or of given information*

3.9
consistent common reference point
CCRP

(MSC191/A) *location on own ship, to which all horizontal measurements such as own ship position, heading, and target range, bearing, relative course, relative speed, closest point of approach (CPA) or time to closest point of approach (TCPA) are referenced, typically the conning position of the ship*

Note 1 to entry: An alternative location (or multiple locations) may be used, as necessary, where clearly indicated or distinctively obvious, for example, the origin of the reference axis of the ship.

3.10
composite presentation

integrated presentation that is derived from the simultaneous display of information from two or more navigational systems or from other pieces of equipment

3.11
dangerous target

(MSC191/A) *tracked radar or reported AIS target with a predicted CPA and TCPA that violates values preset by the user. The respective target is marked by a “dangerous target” symbol*

3.12
dead-reckoned position
DR

position extrapolated from the last accepted position update, based on present course and speed, and updated on a time interval selected by the operator

3.13
display base

(MSC191/A) *level of information which cannot be removed from the ECDIS display, consisting of information which is required at all times in all geographic areas and all circumstances. It is not intended to be sufficient for safe navigation*

3.14
display equipment

device capable of representing information visually

3.15
doubtful integrity

state when integrity cannot be verified

3.16
electronic chart display and information system
ECDIS

system which complies with the requirements set forth in IMO Resolution MSC.232(82)

3.17
electronic chart information

one or more electronic chart databases

EXAMPLE ENC.

3.18
electronic navigational chart
ENC

(MSC191/A) *database standardised as to content, structure and format according to IHO S-57 and its Appendix B.1 and issued by, or on the authority of, a Government*

3.19

emergency alarm

(MSC.302/A) *highest priority of an alert. Alarms which indicate immediate danger to human life or to the ship and its machinery exists and require immediate action*

3.20

estimated position

EP

position extrapolated from the last accepted position update, based on present course and speed (STW), including effects of wind, tide, current, and updated on a time interval selected by the operator

3.21

fix

position of own ship determined, without reference to any former position, by the common intersection of two or more LOPs

3.22

heading

(MSC191/A) *horizontal direction in which the bow of a ship is actually pointing at any instant, expressed as an angular displacement from north*

3.23

icon

graphical symbol with a particular meaning used to convey information independent of language

Note 1 to entry: Icons may be used for visual identification or reinforcement of a textual description, to invoke a function, or to open an object when selected with the cursor.

3.24

important indication

(MSC191/A) *marking of an operational status of displayed information which needs special attention, for example, information with low integrity or invalid information*

Note 1 to entry: The important indication is not part of alert classification.

3.25

indication

display of regular information and conditions, not part of alert management

3.26

integrated navigation system

INS

system which complies with the requirements set forth in IMO Resolution MSC.252(83)

3.27

integrity

property of information as being within the specified accuracy in a timely, complete and unambiguous manner

3.28

line of position

LOP

plotted line on which own ship is located determined by observation or measurement of the range or bearing to an aid to navigation or other charted element