



Designation: C 506 – 02

# Standard Specification for Reinforced Concrete Arch Culvert, Storm Drain, and Sewer Pipe<sup>1</sup>

This standard is issued under the fixed designation C 506; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

*This standard has been approved for use by agencies of the Department of Defense.*

## 1. Scope

1.1 This specification covers reinforced arch-shaped concrete pipe to be used for the conveyance of sewage, industrial wastes, storm water, and for the construction of culverts.

1.2 A complete metric companion to Specification C 506 has been developed—C 506M; therefore, no metric equivalents are presented in this specification.

NOTE 1—This specification is a manufacturing and purchase specification only, and does not include requirements for bedding, backfill, or the relationship between field load condition and the strength classification of pipe. However, experience has shown that the successful performance of this product depends upon the proper selection of the class of pipe, type of bedding and backfill, and care that the installation conforms to the construction specifications. The owner of the reinforced concrete pipe specified herein is cautioned that he must correlate the field requirements with the class of pipe specified and provide inspection at the construction site.

## 2. Referenced Documents

### 2.1 ASTM Standards:

- A 82 Specification for Steel Wire, Plain, for Concrete Reinforcement<sup>2</sup>
- A 185 Specification for Steel Welded Wire Reinforcement, Plain, for Concrete<sup>2</sup>
- A 496 Specification for Steel Wire, Deformed, for Concrete Reinforcement<sup>2</sup>
- A 497 Specification for Steel Welded Wire Reinforcement, Deformed, for Concrete<sup>2</sup>
- A 615/A 615M Specification for Deformed and Plain Billet-Steel Bars for Concrete Reinforcement<sup>2</sup>
- C 33 Specification for Concrete Aggregates<sup>3</sup>
- C 150 Specification for Portland Cement<sup>4</sup>
- C 309 Specification for Liquid Membrane-Forming Compounds for Curing Concrete<sup>3</sup>

<sup>1</sup> This specification is under the jurisdiction of ASTM Committee C13 on Concrete Pipe and is the direct responsibility of Subcommittee C13.02 on Reinforced Sewer and Culvert Pipe.

Current edition approved July 10, 2002. Published August 2002. Originally published as C 506–63T. Last previous edition C 506–00.

<sup>2</sup> Annual Book of ASTM Standards, Vol 01.04.

<sup>3</sup> Annual Book of ASTM Standards, Vol 04.02.

<sup>4</sup> Annual Book of ASTM Standards, Vol 04.01.

- C 497 Test Methods for Concrete Pipe, Manhole Sections, or Tile<sup>5</sup>
- C 595 Specification for Blended Hydraulic Cements<sup>4</sup>
- C 618 Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use as a Mineral Admixture in Concrete<sup>3</sup>
- C 822 Terminology Relating to Concrete Pipe and Related Products<sup>5</sup>
- C 1116 Specification for Fiber-Reinforced Concrete and Shotcrete<sup>3</sup>

## 3. Terminology

3.1 *Definitions*—For definitions of terms relating to concrete pipe, see Terminology C 822.

## 4. Classification

4.1 Pipe manufactured according to this specification shall be of three classes identified as Class A-II, A-III, and A-IV. The strength requirements are prescribed in Table 1.

## 5. Basis of Acceptance

5.1 Unless otherwise designated by the owner at the time of, or before placing an order, two separate and alternative bases of acceptance are permitted as follows:


5.1.1 *Acceptance on Basis of Plant Load Bearing Tests, Material Tests, and Inspection of the Complete Product*—Acceptability of the pipe in all sizes and classes produced in accordance with 7.1 or 7.2, shall be determined by the results of the three-edge-bearing tests for either the load to produce a 0.01-in. crack or, at the option of the owner, the load to produce the 0.01-in. crack and the ultimate load; by such material tests as are required in accordance with 6.1, 6.2 and 6.4, by absorption tests on selected samples from the wall of the pipe; and by inspection of the finished pipe to determine its conformance with the design prescribed in this specification and its freedom from defects.

5.1.2 *Acceptance on Basis of Material Tests and Inspection of the Complete Product*—Acceptability of the pipe in all sizes and classes shall be determined by the results of such material

<sup>5</sup> Annual Book of ASTM Standards, Vol 04.05.

TABLE 1 Strength Requirements for Reinforced Concrete Pipe<sup>A</sup>

Approximate Equivalent Round Size, in.	T, in.	Minimum Rise, in.	Minimum Span, in.	Double Line Reinforcement <sup>C</sup>																				
				$f'c$ , <sup>B</sup> MPA									Additional Reinforcement = $A_s$ <sup>D</sup>									Single Line Reinforcement		
				Class			Inner Cage			Outer Cage			"U" (Inner Cage)			"V" (Outer Cage)								
				A-II	A-III	A-IV	A-II	A-III	A-IV	A-II	A-III	A-IV	Dimension, in.	A-II	A-III	A-IV	Dimension, in.	A-II	A-III	A-IV	A-II	A-III	A-IV	
15	2¼	11	18	4	4	4	...	...	...	...	...	...	...	...	...	...	...	0.08	0.12	0.17				
18	2½	13½	22	4	4	4	...	...	...	...	...	...	...	...	...	...	...	0.11	0.14	0.26				
21	2¾	15½	26	4	4	4	...	...	...	...	...	...	...	...	...	...	...	0.13	0.17	0.29				
24	3	18	28½	4	4	4	...	...	...	...	...	...	...	...	...	...	...	0.16	0.22	0.32				
30	3½	22½	36¼	4	4	4	0.09	0.12	0.18	0.07	0.09	0.14	26	0.09	0.12	0.18	29	0.07	0.09	0.13	0.18	0.24	0.36	
36	4	26½	43¾	4	4	4	0.11	0.15	0.22	0.09	0.12	0.17	30	0.11	0.15	0.22	34	0.09	0.12	0.16	0.22	0.30	0.44	
42	4½	31¾	51½	4	4	4	0.13	0.18	0.27	0.10	0.14	0.21	34	0.13	0.18	0.27	39	0.10	0.14	0.22	0.26	0.36	0.54	
48	5	36	58½	4	4	...	0.15	0.22	...	0.12	0.17	...	42	0.15	0.22	...	43	0.12	0.17	...	0.30	0.44	...	
54	5½	40	65	4	4	...	0.18	0.24	...	0.14	0.19	...	48	0.18	0.24	...	49	0.14	0.19	...	0.36	0.48	...	
60	6	45	73	4	4	...	0.21	0.28	...	0.17	0.22	...	52	0.21	0.28	...	55	0.17	0.22	...	0.42	0.56	...	
72	7	54	88	4	5	...	0.26	0.36	...	0.20	0.28	...	60	0.26	0.36	...	67	0.20	0.28	...	0.52	0.72	...	
84	8	62	102	4	5	...	0.32	0.44	...	0.24	0.34	...	68	0.32	0.44	...	77	0.24	0.34	...	0.64	0.88	...	
90	8½	72	115	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	
96	9	77½	122	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	
108	10	87½	138	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	
120	11	96¾	154	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	
132	10	106½	168¾	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	

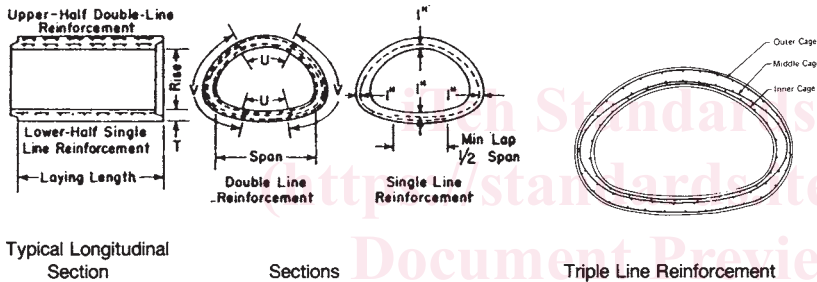

Class	0.01-in. Crack	Ultimate
II	1000	1500
III	1350	2000
IV	2000	3000

Note—Test load in pounds per linear foot equals D-load × inside span in feet.

<sup>A</sup> For modified or special designs, see 7.3.  
<sup>B</sup>  $f'c$ , ksi = minimum compressive strength of concrete in thousands of pounds-force per square inch.  
<sup>C</sup> As an alternative to designs requiring double line reinforcement, the reinforcement may be positioned and proportioned so that the total reinforcement of the inner cage plus the middle cage shall not be less than that specified for the inner cage continuous basic reinforcement, and the additional reinforcement "U" and the total reinforcement of the outer cage plus the middle cage shall not be less than that specified for the outer cage continuous basic reinforcement and the additional reinforcement "V."  
<sup>D</sup>  $A_s$  = circumferential steel area in square inches per longitudinal foot of pipe barrel in each continuous basic cage and additional cages in area denoted "U" and "V." Dimensions "U" and "V" are measured on the center line of the culvert wall.

tests as are required in accordance with 6.1, 6.2 and 6.4; by crushing tests on concrete cores or cured concrete cylinders; by absorption tests on selected samples from the wall of the pipe; and by inspection of the finished pipe, including amount and placement of reinforcement, to determine its conformance with the design prescribed in this specification and its freedom from defects.

5.1.3 When agreed upon by the owner and the manufacturer, any portion or any combination of the tests itemized in 5.1.1 or 5.1.2 may form the basis of acceptance.

5.2 Age for Acceptance—Pipe shall be considered ready for acceptance when they conform to the requirements as indicated by the specified tests.

**6. Materials**

6.1 The aggregate shall be so sized, graded, proportioned, and mixed with such proportions of portland cement, blended hydraulic cement, or portland cement and supplementary cementing materials, or admixtures, or a combination thereof,

if used, and water to produce a homogeneous concrete mixture of such quality that the pipe will conform to the test and design requirements of this specification. In no case, however, shall the proportion of portland cement, blended hydraulic cement, or a combination of portland cement and supplementary cementing materials be less than 470 lb/yd<sup>3</sup>.

6.2 Cementitious Materials:  
 6.2.1 Cement—Cement shall conform to the requirements for portland cement of Specification C 150, or shall be portland blast-furnace slag cement or portland-pozzolan cement conforming to the requirements of Specification C 595, except that the pozzolan constituent in the Type IP portland-pozzolan cement shall be fly ash.  
 6.2.2 Fly Ash—Fly ash shall conform to the requirements of Class F or Class C of Specification C 618.

6.2.3 Allowable Combinations of Cementitious Materials—The combination of cementitious materials used in the concrete shall be one of the following:  
 6.2.3.1 Portland cement only,

- 6.2.3.2 Portland blast furnace slag cement only,
- 6.2.3.3 Portland pozzolan cement only, or
- 6.2.3.4 A combination of portland cement and fly ash.

6.3 *Aggregates*—Aggregates shall conform to Specification C 33 except that the requirement for gradation shall not apply.

6.4 *Admixtures and Blends*—Admixtures and blends may be used with the approval of the owner.

6.5 *Steel Reinforcement*—Reinforcement shall consist of wire conforming to Specification A 82, or Specification A 496, or of wire fabric conforming to Specification A 185, or Specification A 497, or of bars of Grade 40 steel conforming to Specification A 615/A 615M.

6.6 *Synthetic Fibers*—Collated fibrillated virgin polypropylene fibers may be used, at the manufacturer’s option, in concrete pipe as a nonstructural manufacturing material. Only Type III synthetic fibers designed and manufactured specifically for use in concrete and conforming to the requirements of Specification C 1116 shall be accepted.

**7. Design**

7.1 *Size and Dimensions*—The standard sizes of arch pipe are listed in Table 1. The internal dimensions for each standard size shall be as defined in Fig. 1, subject to the permissible variations of Section 12.

7.2 *Design Tables*—The wall thickness, compressive strength of concrete, and the area of circumferential reinforcement shall be as prescribed in Table 1, subject to the provisions of 7.3 and Sections 11 and 12.


7.2.1 Footnotes to the tables herein are intended to be amplifications of the tabulated requirements and are to be considered applicable and binding as if they were contained in the body of the specification.

*7.3 Modified and Special Designs:*

7.3.1 If permitted by the owner, the manufacturer may request approval by the owner of modified designs that differ from the designs in this Section 7 or special designs for sizes and loads beyond those shown in Table 1, or special designs for pipe sizes that do not have steel reinforcement areas shown in Table 1.

7.3.2 Such modified or special designs shall be based on rational or empirical evaluations of the ultimate strength and cracking behavior of pipe and shall fully describe to the owner any deviations from the requirements of this Section 7. The descriptions of modified or special designs shall include the wall thickness, the concrete strength, and the area, type, placement, number of layers, and strength of the steel reinforcement.

7.3.3 The manufacturer shall submit to the owner proof of the adequacy of the proposed modified or special design. Such proof may comprise the submission of certified three-edge-bearing tests already made, which are acceptable to the owner or, if such three-edge-bearing tests are not available or acceptable, the manufacturer may be required to perform proof tests on sizes and classes selected by the owner to demonstrate the adequacy of the proposed design.

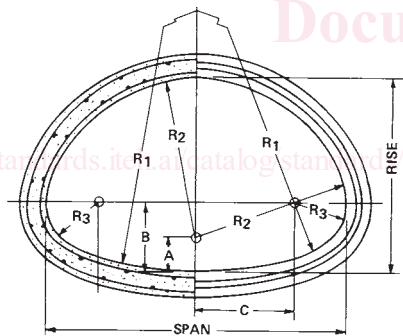

$$A = \text{Rise} - R_2$$

$$B = A + \sqrt{(R_2 - R_3)^2 - C^2}$$

$$C = \frac{\text{Span}}{2} - R_3$$

Approximate Equivalent Round Size, in.	Water Area, ft <sup>2</sup>	Rise, in.	Span, in.	A, in.	B, in.	C, in.	R <sub>1</sub> , in.	R <sub>2</sub> , in.	R <sub>3</sub> , in.
15	1.1	11	18	3/8	4 1/16	4 31/32	22 7/8	10 5/8	4 1/32
18	1.65	13 1/2	22	-1/4	6	5 3/4	27 1/2	13 3/4	5 1/4
21	2.2	15 1/2	26	3/4	6 1/4	7 3/4	35 1/2	14 3/4	5 1/4
24	2.8	18	28 1/2	3 7/16	5 29/32	9 21/32	40 11/16	14 9/16	4 19/32
30	4.4	22 1/2	36 1/4	3 3/4	7 11/16	12 3/32	51	18 3/4	6 1/32
36	6.4	26 5/8	43 3/4	4 1/8	8 9/16	15 1/2	62	22 1/2	6 9/8
42	8.8	31 5/16	51 1/8	5 1/16	10 1/16	18	73	26 1/4	7 9/16
48	11.4	36	58 1/2	6	11 19/32	20 1/2	84	30	8 3/4
54	14.3	40	65	6 5/8	13	22 11/16	92 1/2	33 3/8	9 13/16
60	17.7	45	73	7 1/2	14 11/16	25 9/32	105	37 1/2	11 7/32
72	25.6	54	88	9	17	31 7/16	126	45	12 9/16
84	34.6	62	102	10	18 21/32	37 1/32	162 1/2	52	13 31/32
90	44.5	72	115	13	23 13/16	38 7/32	183	59	19 9/32
96	51.7	77 1/4	122	15 1/4	24 11/32	40 15/16	218	62	20 1/16
108	66.0	87 1/8	138	17 1/8	26 27/32	46 5/8	269	70	22 3/8
120	81.8	96 7/8	154	18 7/8	29 7/32	53	301 3/8	78	24
132	99.1	106 1/2	168 3/4	20 7/8	32 15/16	57 1/2	329	85 5/8	26 7/8

FIG. 1 Cross-Sectional Shape of Arch Pipe