

# INTERNATIONAL STANDARD

## NORME INTERNATIONALE

Environmental testing –

Part 2-39: Tests – Tests and guidance: Combined temperature or temperature and humidity with low air pressure tests

Essais d'environnement –

Partie 2-39: Essais – Essais et lignes directrices: Essais combinés de température ou de température et d'humidité à basse pression atmosphérique



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2015 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
Fax: +41 22 919 03 00  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

#### IEC Catalogue - [webstore.iec.ch/catalogue](http://webstore.iec.ch/catalogue)

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

#### IEC publications search - [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

#### IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

#### Electropedia - [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

#### IEC Glossary - [std.iec.ch/glossary](http://std.iec.ch/glossary)

More than 60 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

#### IEC Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [csc@iec.ch](mailto:csc@iec.ch).

### A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

### A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

#### Catalogue IEC - [webstore.iec.ch/catalogue](http://webstore.iec.ch/catalogue)

Application autonome pour consulter tous les renseignements bibliographiques sur les Normes internationales, Spécifications techniques, Rapports techniques et autres documents de l'IEC. Disponible pour PC, Mac OS, tablettes Android et iPad.

#### Recherche de publications IEC - [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

#### IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

#### Electropedia - [www.electropedia.org](http://www.electropedia.org)

Le premier dictionnaire en ligne de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans 15 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

#### Glossaire IEC - [std.iec.ch/glossary](http://std.iec.ch/glossary)

Plus de 60 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

#### Service Clients - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: [csc@iec.ch](mailto:csc@iec.ch).

# INTERNATIONAL STANDARD

## NORME INTERNATIONALE

---

**Environmental testing –**

**Part 2-39: Tests – Tests and guidance: Combined temperature or temperature and humidity with low air pressure tests**

**Essais d'environnement –**

**Partie 2-39: Essais – Essais et lignes directrices: Essais combinés de température ou de température et d'humidité à basse pression atmosphérique**

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

COMMISSION  
ELECTROTECHNIQUE  
INTERNATIONALE

ICS 19.040

ISBN 978-2-8322-2897-5

**Warning! Make sure that you obtained this publication from an authorized distributor.  
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

## CONTENTS

|  |    |
|--|----|
| FOREWORD .....   | 3  |
| INTRODUCTION .....   | 5  |
| 1 Scope and object .....   | 6  |
| 2 Normative references .....   | 6  |
| 3 Terms and definitions .....  | 6  |
| 4 Testing .....  | 6  |
| 4.1 General .....  | 6  |
| 4.2 Preferred combinations .....   | 6  |
| 4.3 Initial measurement and functional performance test .....  | 7  |
| 4.4 Test procedure .....   | 7  |
| 4.4.1 Preconditioning .....  | 7  |
| 4.4.2 Test with temperature and low air pressure .....   | 7  |
| 4.4.3 Test with temperature, humidity and low air pressure .....   | 9  |
| 5 Final measurements .....   | 12 |
| 6 Information to be given in the relevant specification .....  | 12 |
| 7 Information to be given in the test report .....   | 12 |
| Annex A (informative) Guidance on combined temperature or temperature and humidity with low air pressure testing ..... | 14 |
| A.1 General .....  | 14 |
| A.2 Environmental effects .....  | 14 |
| A.3 Measurement of temperature .....   | 14 |
| Bibliography .....   | 16 |
| Figure 1 – Example of test sequence with cold temperature and low air pressure .....                                   | 8  |
| Figure 2 – Example of test sequence with dry heat and low air pressure .....   | 9  |
| Figure 3 – Example of test sequence of temperature and humidity with low air pressure .....                            | 11 |
| Table 1 – Test severities .....  | 7  |

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

## ENVIRONMENTAL TESTING –

**Part 2-39: Tests –  
Tests and guidance: Combined temperature or  
temperature and humidity with low air pressure tests**

## FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60068-2-39 has been prepared by IEC technical committee 104: Environmental conditions, classification and methods of test.

This second edition cancels and replaces the first edition published in 1976 and constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) preferred severities of the IEC 60068 series;
- b) combined temperature, humidity and low air pressure

The text of this standard is based on the following documents:

| FDIS         | Report on voting |
|--------------|------------------|
| 104/657/FDIS | 104/661/RVD      |

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 60068 series, published under the general title *Environmental testing*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[IEC 60068-2-39:2015](#)

<https://standards.iteh.ai/catalog/standards/sist/8001575a-4aad-4bfd-a0d0-564e744038f4/iec-60068-2-39-2015>

## INTRODUCTION

Equipment and components are required to function without significant reduction in performance when subjected to different environmental parameters. The combination of temperature, humidity and low air pressure may have certain effects on components and gaskets, for example.

The type and severity of the environmental parameters depend on the operational, transport and storage environments to which the equipment and components are subjected. The environmental effects on the performance of equipment in the tropics and subtropics are totally different from those in arctic regions. Individual environmental parameters cause a variety of different and overlapping effects on the equipment and components.

The manufacturer attempts to ensure, and the user expects, that equipment and components will survive the environments to which they will be subjected throughout their useful life. This expectation can be assessed by exposure of the specimen to a range of simulated environmental parameters controlled in the laboratory. The severity of the environmental parameters is often increased to obtain meaningful results in a relatively short period of time. This allows assessment of the likely effects of applied environmental conditions.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

IEC 60068-2-39:2015

<https://standards.iteh.ai/catalog/standards/sist/8001575a-4aad-4bfd-a0d0-564e744038f4/iec-60068-2-39-2015>

## ENVIRONMENTAL TESTING –

### Part 2-39: Tests – Tests and guidance: Combined temperature or temperature and humidity with low air pressure tests

#### 1 Scope and object

This part of IEC 60068 provides a description of test methods and guidance for testing of equipment or components under combined temperature or temperature and humidity with low air pressure tests.

The object of combined testing is to investigate to what extent the equipment or components are affected by combined temperature or temperature and humidity with low air pressure tests.

The method of combined tests detects electrical, mechanical or other physical variations.

#### 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

[IEC 60068-2-39:2015](#)

IEC 60068-1, *Environmental testing – Part 1: General and guidance*

IEC 60068-2-78, *Environmental testing – Part 2-78: Tests – Test Cab: Damp heat, steady state*

#### 3 Terms and definitions

None.

#### 4 Testing

##### 4.1 General

All values of test parameters such as cold, dry heat, low air pressure, humidity, exposure time and conditions such as state of operation and so on, should be selected from the IEC 60068-2 series or the relevant specification.

The duration of exposure shall be measured from the time when temperature stability of the specimen has been reached under conditions of low air pressure. Temperature stability shall be according to IEC 60068-1.

It should preferably be tested with low air velocity.

##### 4.2 Preferred combinations

Preferred combinations of temperature, low air pressure and duration shall be selected from Table 1.



**Table 1 – Test severities**

| Temperature<br>°C | Low air pressure<br>kPa | Duration<br>h |
|-------------------|-------------------------|---------------|
| –55               | 5                       | 2             |
| –55               | 15                      | 2             |
| –55               | 25                      | 2             |
| –55               | 40                      | 2             |
| –40               | 55                      | 2 or 16       |
| –40               | 70                      | 2 or 16       |
| –25               | 55                      | 2 or 16       |
| 40                | 55                      | 2             |
| 55                | 15                      | 2             |
| 55                | 25                      | 2             |
| 55                | 40                      | 2             |
| 55                | 55                      | 2 or 16       |
| 55                | 70                      | 2 or 16       |
| 85                | 5                       | 2             |
| 85                | 15                      | 2             |
| 155               | 5                       | 2             |
| 155               | 15                      | 2             |

### 4.3 Initial measurement and functional performance test

The specimen shall be submitted to the visual, dimensional and functional checks specified by the relevant specification.

### 4.4 Test procedure

#### 4.4.1 Preconditioning

The relevant specification may require preconditioning of specimen.

#### 4.4.2 Test with temperature and low air pressure

Figure 1 and Figure 2 show examples of test sequence with temperature and low air pressure.

The specimen shall be introduced in the chamber as required (unpacked, switched on or off, etc.).

The temperature within the chamber shall be adjusted to the required temperature as determined in 4.1. The rate of temperature change should not exceed 1 K/min. The specimen shall be allowed to reach temperature stability.


In the case of electrically-operated specimens, a function check shall be made in accordance with the relevant specification. Intermediate measurements shall be performed as required or specified in the relevant specification.

The pressure in the chamber shall then be reduced to the required value as determined in 4.1. The rate of change of pressure should not exceed 15 kPa/min.

The conditions of temperature and low air pressure shall be maintained for the required duration as determined in 4.1.

The low air pressure shall then be restored to normal pressure, at a rate not exceeding 15 kPa/min. During the increase of pressure, the temperature does not need to be controlled. The specimen remains within the chamber until the temperature reaches standard atmospheric conditions. The rate of temperature change should not exceed 1 K/min.


The specimen shall then be subjected to the recovery procedure as required.

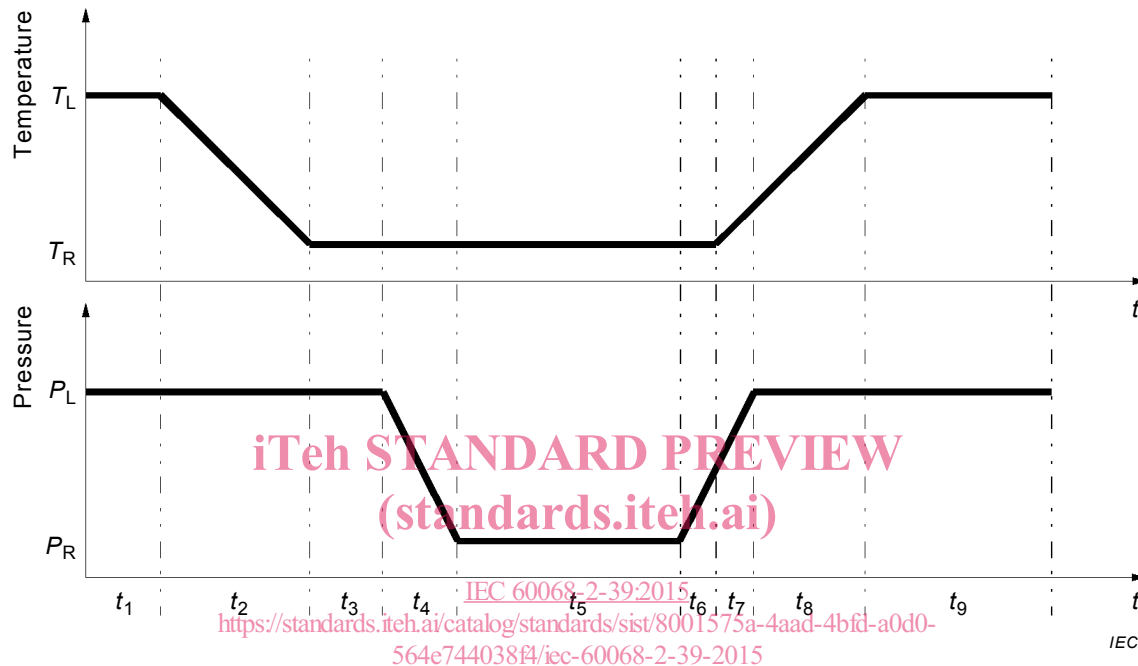

#### Key

|                  |  |
|------------------|--|
| $P_L$            | pressure at laboratory                                 |
| $P_R$            | pressure required                                      |
| $T_L$            | temperature at laboratory                              |
| $T_R$            | temperature required                                   |
| $t_1$            | duration of preconditioning at $P_L$ and $T_L$         |
| $t_2$            | duration of temperature change from $T_L$ to $T_R$     |
| $t_3$            | duration to reach required temperature stability $T_R$ |
| $t_4$            | duration of pressure change from $P_L$ to $P_R$        |
| $t_5$            | test duration as defined in Table 1                    |
| $t_6$ plus $t_7$ | duration of pressure change from $P_R$ to $P_L$        |
| $t_7$ plus $t_8$ | duration of temperature change from $T_R$ to $T_L$     |
| $t_9$            | duration of recovery at $P_L$ and $T_L$                |

**Figure 1 – Example of test sequence with cold temperature and low air pressure**

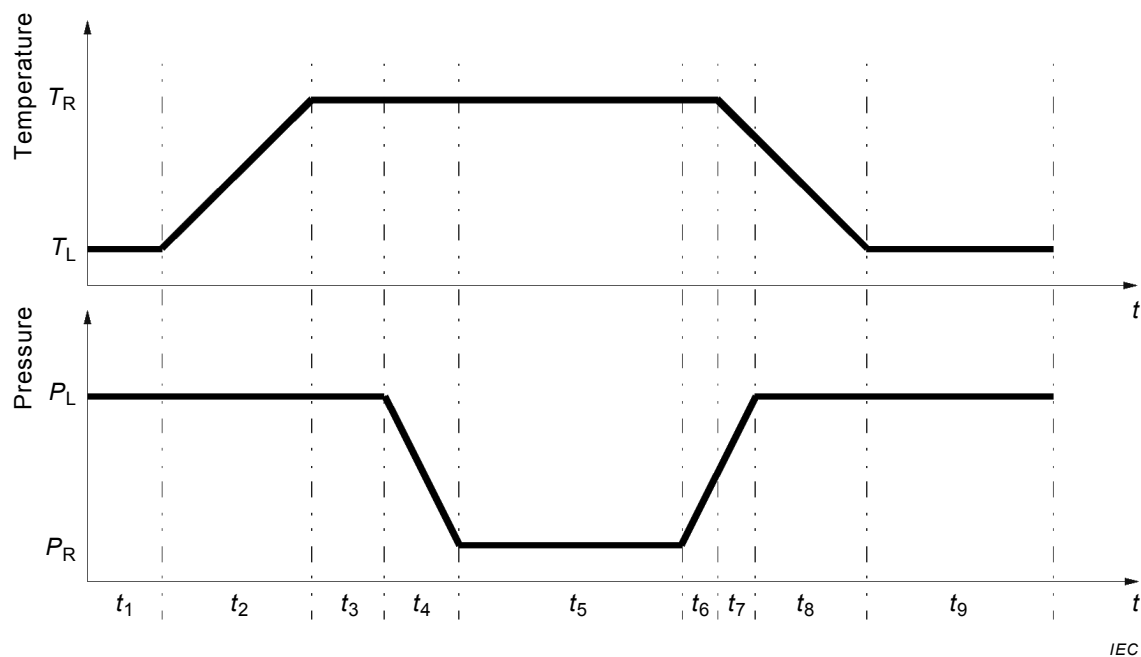

**Key**

- $P_L$  pressure at laboratory
- $P_R$  pressure required
- $T_L$  temperature at laboratory
- $T_R$  temperature required
- $t_1$  duration of preconditioning at  $P_L$  and  $T_L$
- $t_2$  duration of temperature change from  $T_L$  to  $T_R$
- $t_3$  duration to reach required temperature stability  $T_R$
- $t_4$  duration of pressure change from  $P_L$  to  $P_R$
- $t_5$  test duration as defined in Table 1
- $t_6$  plus  $t_7$  duration of pressure change from  $P_R$  to  $P_L$
- $t_7$  plus  $t_8$  duration of temperature change from  $T_R$  to  $T_L$
- $t_9$  duration of recovery at  $P_L$  and  $T_L$

**Figure 2 – Example of test sequence with dry heat and low air pressure**

**4.4.3 Test with temperature, humidity and low air pressure**

Figure 3 shows an example of test sequence of temperature and humidity with low air pressure.

The specimen shall be introduced in the chamber as required (unpacked, switched on or off, etc.)

The temperature within the chamber shall be adjusted to the required temperature as determined in 4.1. The rate of temperature change should not exceed 1 K/min. The specimen shall be allowed to reach temperature stability.

A functional test shall be carried out in accordance with the relevant specification. Intermediate measurements shall be performed as required or specified in the relevant specification.

With the temperature still maintained at the required value as determined in 4.1, the air pressure in the chamber shall then be reduced to the required value as determined in 4.1. The rate of change of pressure should not exceed 15 kPa/min.

The conditions of temperature and low air pressure shall be maintained for the required duration as determined in 4.1.

Water vapour shall then be injected at a rate sufficient to cause frost to form on the specimen. After that, the temperature shall be raised to laboratory temperature, while the low air pressure is constant.

When the rising temperature has reached a value between 0 °C and 5 °C, the low air pressure shall be restored to normal pressure with a rate not exceeding 15 kPa/min. During the increase of pressure, the temperature does not need to be controlled. The temperature and humidity shall be stabilized at the required values; refer to the relevant specification or IEC 60068-2-78. The conditions of temperature and humidity shall be maintained for the required duration as determined in 4.1.

The specimen shall then be subjected to the recovery procedure as required.

## **iTeh STANDARD PREVIEW** **(standards.iteh.ai)**

[IEC 60068-2-39:2015](https://standards.iteh.ai/catalog/standards/sist/8001575a-4aad-4bfd-a0d0-564e744038f4/iec-60068-2-39-2015)

<https://standards.iteh.ai/catalog/standards/sist/8001575a-4aad-4bfd-a0d0-564e744038f4/iec-60068-2-39-2015>