

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Discharge lamps (excluding fluorescent lamps) – Safety specifications

Lampes à décharge (à l'exclusion des lampes à fluorescence) – Prescriptions de sécurité

[IEC 62035:2014](#)

<https://standards.iteh.ai/catalog/standards/sist/bd85fa17-3d4c-49f0-abd5-215f59025eab/iec-62035-2014>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2014 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms, containing 20 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Catalogue IEC - webstore.iec.ch/catalogue

Application autonome pour consulter tous les renseignements bibliographiques sur les Normes internationales, Spécifications techniques, Rapports techniques et autres documents de l'IEC. Disponible pour PC, Mac OS, tablettes Android et iPad.

Recherche de publications IEC - www.iec.ch/searchpub

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne de termes électroniques et électriques. Il contient 20 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans 15 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

65 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Discharge lamps (excluding fluorescent lamps) – Safety specifications

Lampes à décharge (à l'exclusion des lampes à fluorescence) – Prescriptions de sécurité

[IEC 62035:2014](#)

<https://standards.iteh.ai/catalog/standards/sist/bd85fa17-3d4c-49f0-abd5-215f59025eab/iec-62035-2014>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 29.140.30

ISBN 978-2-8322-3740-3

| |
|--|
| <p>Warning! Make sure that you obtained this publication from an authorized distributor.</p> <p>Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.</p> |
|--|

CONTENTS

| | |
|---|----|
| FOREWORD..... | 5 |
| 1 Scope..... | 7 |
| 2 Normative references | 7 |
| 3 Terms and definitions | 8 |
| 4 General safety requirements..... | 10 |
| 4.1 General..... | 10 |
| 4.2 Marking..... | 10 |
| 4.2.1 Lamp marking..... | 10 |
| 4.2.2 Additional information to be provided | 11 |
| 4.3 Mechanical requirements | 11 |
| 4.3.1 Requirements for caps..... | 11 |
| 4.3.2 Construction and assembly..... | 12 |
| 4.4 Electrical requirements | 13 |
| 4.4.1 Parts which can become accidentally live | 13 |
| 4.4.2 Insulation resistance..... | 13 |
| 4.4.3 Electric strength | 13 |
| 4.5 Thermal requirements..... | 14 |
| 4.5.1 General..... | 14 |
| 4.5.2 Resistance to heat..... | 14 |
| 4.5.3 Resistance to abnormal heat and fire..... | 15 |
| 4.6 Photobiological requirements | 15 |
| 4.6.1 UV Hazard..... | 15 |
| 4.6.2 Blue light hazard..... | 16 |
| 4.6.3 IR hazard..... | 16 |
| 5 Particular safety requirements | 17 |
| 5.1 High-pressure sodium vapour lamps | 17 |
| 5.2 Metal halide lamps..... | 17 |
| 5.2.1 General | 17 |
| 5.2.2 Marking | 17 |
| 5.2.3 Containment..... | 17 |
| 6 Information for luminaire design..... | 17 |
| 7 Assessment..... | 17 |
| 7.1 General..... | 17 |
| 7.2 Assessment of whole production by means of manufacturer's records | 18 |
| 7.2.1 General | 18 |
| 7.2.2 Assessment of manufacturer's records for particular tests | 19 |
| 7.2.3 Sampling procedures for the whole production testing | 19 |
| 7.3 Assessment of batches | 23 |
| 7.3.1 Sampling for batch testing | 23 |
| 7.3.2 Number of lamps in batch sample | 23 |
| 7.3.3 Sequence of the tests | 23 |
| 7.3.4 Rejection conditions for large batches (> 500 lamps)..... | 23 |
| 7.3.5 Rejection conditions for small batches (≤ 500 lamps)..... | 24 |
| Annex A (normative) List of lamp caps and gauges..... | 26 |
| Annex B (normative) Pull and torsion test values | 27 |

| | |
|--|----|
| Annex C (normative) Torsion test holders | 28 |
| Annex D (normative) Information for thermal tests | 30 |
| Annex E (normative) Measurement of pulse height for lamps with internal starting device | 31 |
| E.1 Introduction | 31 |
| E.2 Test circuit | 31 |
| E.2.1 Test circuit and key | 31 |
| E.2.2 Ballast characteristics | 31 |
| E.2.3 Power factor capacitor | 32 |
| E.2.4 Pulse height measuring circuit | 32 |
| E.3 Tests | 32 |
| E.3.1 Lamps with an internal glow switch | 32 |
| E.3.2 Lamps with an internal thermal switch | 32 |
| Annex F (informative) Information for luminaire design | 34 |
| F.1 Guidelines for safe lamp operation | 34 |
| F.2 Maximum lamp cap temperature | 34 |
| F.3 Cap/holder – key configuration | 34 |
| F.4 Protection against lamp shattering | 34 |
| F.5 Protection against UV radiation | 35 |
| F.6 Possible condition at end of lamp life | 35 |
| Annex G (normative) Conditions of compliance for design tests | 36 |
| G.1 Insulation resistance (see 4.4.2) Electric strength (see 4.4.3) | 36 |
| G.2 Cap construction and assembly (see 4.3.2.2 b) and 4.3.2.3 b)) | 36 |
| G.3 Cap creepage distance (see 4.3.1.2) Resistance to heat (see 4.5.2.1 and 4.5.2.2) Resistance to abnormal heat and fire (see 4.5.3.1) Pulse height (see 5.1.) UV radiation (see 4.6.1.3) | 36 |
| Annex H (normative) Symbols | 37 |
| H.1 General | 37 |
| H.2 Symbol indicating that the lamp shall be operated only in a luminaire provided with a protective shield | 37 |
| H.3 Symbol indicating that the lamp emits a high level of UV radiation | 37 |
| H.4 Symbol indicating that the lamp shall not be operated when the outer bulb is broken | 37 |
| H.5 Self-shielded lamp symbol indicating that the lamp can be operated in a luminaire without a protective shield | 38 |
| H.6 Symbol indicating not to stare at a light source, for example, a lamp, a luminaire, a video projector etc. | 38 |
| Annex I (normative) Containment testing procedure for metal halide lamps with quartz arc tubes | 39 |
| I.1 General | 39 |
| I.1.1 Purpose | 39 |
| I.1.2 Test description | 39 |
| I.2 Experimental setup | 39 |
| I.2.1 Safety precautions | 39 |
| I.2.2 Electrical circuit | 39 |
| I.2.3 Enclosure requirements | 41 |
| I.3 Test procedures | 41 |
| I.3.1 Lamp selection and preparation | 41 |
| I.3.2 Determination of median rupture energy | 41 |

| | | |
|---------------------|---|----|
| I.3.3 | Rupture test procedure | 42 |
| I.4 | Self-shielded lamp design | 42 |
| I.4.1 | Definition of damage to the outer bulb | 42 |
| I.4.2 | Determination of self-shielded | 42 |
| Annex J (normative) | Containment testing procedure for metal halide lamps with ceramic arc tubes | 43 |
| J.1 | General..... | 43 |
| J.1.1 | Purpose | 43 |
| J.1.2 | Test description | 43 |
| J.2 | Experimental setup | 43 |
| J.2.1 | Safety precautions | 43 |
| J.2.2 | Electrical circuit | 43 |
| J.2.3 | Enclosure requirements | 44 |
| J.3 | Test procedures | 44 |
| J.3.1 | Lamp selection and preparation | 44 |
| J.3.2 | Determination of median rupture energy | 44 |
| J.3.3 | Rupture test procedure | 45 |
| J.4 | Self-shielded lamp design | 45 |
| J.4.1 | Definition of damage to the outer bulb | 45 |
| J.4.2 | Determination of containment rating | 45 |
| Bibliography..... | | 47 |
| Figure 1 | – Edison screw-capped lamp | 13 |
| Figure C.1 | – Holder for torsion test on lamps with Edison screw caps | 28 |
| Figure C.2 | – Holder for torsion test on lamps with bayonet caps | 29 |
| Figure D.1 | – Ball pressure test apparatus | 30 |
| Figure E.1 | – Test circuit..... | 31 |
| Figure I.1 | – Basic electrical diagram for quartz metal halide lamp containment test | 40 |
| Figure J.1 | – Electrical diagram for containment test..... | 44 |
| Table 1 | – Classification of risk groups..... | 15 |
| Table 2 | – Grouping of test records – Sampling and acceptable quality levels (AQL) | 20 |
| Table 3 | – Acceptance numbers AQL = 0,65 % | 21 |
| Table 4 | – Acceptance numbers AQL = 2,5 % | 22 |
| Table 5 | – Batch sample size and rejection number (for batches > 500 lamps)..... | 24 |
| Table 6 | – Batch sample size and rejection number (for batches ≤ 500 lamps)..... | 25 |
| Table A.1 | – Data sheet references of IEC 60061 | 26 |
| Table B.1 | – Pull test values | 27 |
| Table B.2 | – Torsion test values..... | 27 |
| Table D.1 | – Temperatures | 30 |
| Table E.1 | – Test ballast resonance characteristics | 32 |
| Table E.2 | – Power factor capacitor values for tests..... | 32 |
| Table F.1 | – Maximum lamp cap temperatures..... | 34 |

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**DISCHARGE LAMPS
(EXCLUDING FLUORESCENT LAMPS) –
SAFETY SPECIFICATIONS****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62035 has been prepared by subcommittee 34A: Lamps, of IEC technical committee 34: Lamps and related equipment.

This bilingual version (2016-11) corresponds to the monolingual English version, published in 2014-04.

This second edition cancels and replaces the first edition published in 1999, AMD1:2003 and AMD2:2012. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition. Photobiological safety requirements are taken care of on basis of the risk group concept of IEC 62471 and the technical report IEC TR 62778 on blue light hazard. This has consequences for terms, marking, structure of 4.6, and introduction of a new symbol "Caution, do not stare at light source". Special attention is given to blue light hazard.

The text of this standard is based on the following documents:

| CDV | Report on voting |
|--------------|------------------|
| 34A/1600/CDV | 34A/1643/RVC |

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

The French version of this standard has not been voted upon.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[IEC 62035:2014](#)

<https://standards.iteh.ai/catalog/standards/sist/bd85fa17-3d4c-49f0-abd5-215f59025eab/iec-62035-2014>

DISCHARGE LAMPS (EXCLUDING FLUORESCENT LAMPS) – SAFETY SPECIFICATIONS

1 Scope

This International Standard specifies the safety requirements for discharge lamps (excluding fluorescent lamps) for general lighting purposes.

This International Standard is applicable to low-pressure sodium vapour lamps and to high-intensity discharge (HID) lamps, i.e. high-pressure mercury vapour lamps (including blended lamps), high-pressure sodium vapour lamps and metal halide lamps. It applies to single- and double-capped lamps, having caps as listed in Annex A.

This standard only concerns safety criteria and does not take into account performance. The performance standards IEC 60188, IEC 60192, IEC 60662, IEC 61167 and IEC 61549 should be referred to for such characteristics.

It may be expected that lamps which comply with this standard will operate safely at supply voltages between 90 % and 110 % of rated supply voltage and when operated with a ballast complying with IEC 61347-2-9 and IEC 60923, with a starting device complying with IEC 61347-2-1 and IEC 60927, and in a luminaire complying with IEC 60598-1.

2 Normative references

[IEC 62035:2014](https://standards.iteh.ai/catalog/standards/sist/bd85fa17-3d4c-49f0-abd5-215b923cab/iec-62035-2014)

<https://standards.iteh.ai/catalog/standards/sist/bd85fa17-3d4c-49f0-abd5-215b923cab/iec-62035-2014>

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050, *International Electrotechnical Vocabulary* (available at <http://www.electropedia.org>)

IEC 60061-1, *Lamp caps and holders together with gauges for the control of interchangeability and safety – Part 1: Lamp caps*

IEC 60061-2, *Lamp caps and holders together with gauges for the control of interchangeability and safety – Part 2: Lampholders*

IEC 60061-3, *Lamp caps and holders together with gauges for the control of interchangeability and safety – Part 3: Gauges*

IEC 60061-4, *Lamp caps and holders together with gauges for the control of interchangeability and safety – Part 4: Guidelines and general information*

IEC 60155, *Glow-starters for fluorescent lamps*

IEC 60662, *High-pressure sodium vapour lamps*

IEC 60695-2-10:2000, *Fire hazard testing – Part 2-10: Glowing/hot-wire based test methods – Glow-wire apparatus and common test procedure*

IEC 60923, *Auxiliaries for lamps – Ballasts for discharge lamps (excluding tubular fluorescent lamps) – Performance requirements*

IEC 61347-2-1, *Lamp controlgear – Part 2-1: Particular requirements for starting devices (other than glow starters)*

IEC 61167, *Metal halide lamps – Performance specification*

IEC TR 62778, *Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires*

ISO 4046-4:2002, *Paper, board, pulp and related terms – Vocabulary – Part 4: Paper and board grades and converted products*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-845 and IEC TR 62778, as well as the following apply.

3.1

HID lamp

high intensity discharge lamp

electric discharge lamp in which the light producing arc is stabilised by wall temperature and the arc has a bulb wall loading in excess of 3 W/cm²

Note 1 to entry: HID lamps include groups of lamps known as high-pressure mercury, metal halide and high-pressure sodium lamps.

[SOURCE: IEC 60050-845:1987, 845.07.19]
IEC 62035:2014
<https://standards.iteh.ai/catalog/standards/sist/bd85fa17-3d4c-49f0-abd5-215f59025eab/iec-62035-2014>

3.2

high pressure mercury vapour lamp

high-intensity discharge lamp in which the major portion of the light is produced, directly or indirectly, by radiation from mercury operating at a partial pressure in excess of 100 kPa

Note 1 to entry: This term covers clear, phosphor coated (mercury fluorescent) and blended lamps. In a fluorescent mercury discharge lamp, the light is produced partly by the mercury vapour and partly by the layer of phosphors excited by the ultraviolet radiation of the discharge.

[SOURCE: IEC 60050-845:1987, 845.07.20]

3.3

blended lamp

self-ballasted mercury lamp, US

lamp containing in the same bulb certain elements of a mercury vapour lamp and an incandescent lamp filament connected in series

Note 1 to entry: The bulb may be diffusing or coated with phosphors.

[SOURCE: IEC 60050-845:1987, 845.07.21, modified — The words "certain elements of" are added.]

3.4

high pressure sodium vapour lamp

high-intensity discharge lamp in which the light is produced mainly by radiation from sodium vapour operating at a partial pressure of the order of 10 kPa

Note 1 to entry: The term covers lamps with clear or diffusing bulb.

[SOURCE: IEC 60050-845:1987, 845.07.23]

3.5

low pressure sodium vapour lamp

discharge lamp in which the light is produced by radiation from sodium vapour operating at a partial pressure of 0,1 Pa to 1,5 Pa

[SOURCE: IEC 60050-845:1987, 845.07.24]

3.6

metal halide lamp

high-intensity discharge lamp in which the major portion of the light is produced by radiation from a mixture of metallic vapour, metal halides and the products of the dissociation of metal halides

Note 1 to entry: The definition covers clear and coated lamps.

[SOURCE: IEC 60050-845:1987, 845.07.25, modified — The words "radiation" and "metal halides" are added.]

3.7

nominal power

approximate quantity value of lamp power used to designate or identify a lamp

3.8

ultraviolet hazard efficacy of luminous radiation

effective power of the UV radiation of a lamp related to its luminous flux

Note 1 to entry: Ultraviolet hazard efficacy of luminous radiation is expressed in mW/klm.

Note 2 to entry: The effective power of the UV radiation is obtained by weighting the spectral power distribution of the lamp with the UV hazard function $SUV(\lambda)$. Information about the relevant UV hazard function is given in IEC 62471. It only relates to possible hazards regarding UV exposure of human beings. It does not deal with the possible influence of optical radiation on materials, like mechanical damage or discoloration.

3.9

type test

test or series of tests made on a type test sample for the purpose of checking compliance of the design of a given product with the requirements of the relevant standard

[SOURCE: IEC 60081:1997, 1.4.10]

3.10

type test sample

sample consisting of one or more similar units submitted by the manufacturer or responsible vendor for the purpose of the type test

[SOURCE: IEC 60081:1997, 1.4.11]

3.11

group

lamps of the same generic type

EXAMPLES: High pressure mercury (vapour) lamp (3.2), blended lamp (3.3), high pressure sodium (vapour) lamp (3.4), low pressure sodium (vapour) lamp (3.5), metal halide lamp (3.6)

3.12

type

lamps of the same group having the same nominal wattage, bulb shape and cap

3.13

family

grouping of lamps characterized by common features such as materials, components and/or method of processing

3.14

design test

test made on a sample for the purpose of checking compliance of the design of a family, group or a number of groups with the requirements of the relevant clause or subclause

3.15

periodic test

test, or series of tests, repeated at intervals in order to check that a product does not deviate in certain respects from the given design

3.16

running test

test repeated at frequent intervals to provide data for assessment

3.17

batch

all lamps in one family and/or group and identified as such and put forward at one time for checking compliance

3.18

whole production

production during a period of 12 months of all types of lamps within the scope of this standard and nominated in a list of the manufacturer for inclusion in the certificate

[IEC 62035:2014](https://standards.iteh.ai/catalog/standards/sist/bd85fa17-3d4c-49f0-abd5-215f59025eab/iec-62035-2014)

3.19

self-shielded metal halide lamp

metal halide lamp for which the luminaire needs no protective shield

iTeh STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/bd85fa17-3d4c-49f0-abd5-215f59025eab/iec-62035-2014>

4 General safety requirements

4.1 General

Lamps shall be so designed and constructed that in normal use they present no danger to the user or the surroundings.

In general, compliance is checked by carrying out all the tests specified in this standard.

4.2 Marking

4.2.1 Lamp marking

Lamps shall be marked as follows:

- mark of origin, which may take the form of a trademark, the manufacturer's name or the name of the responsible vendor;
- nominal power (marked "W" or "watts") and/or any other indication which identifies the lamp.

In the relevant lamp performance standards, the nominal power may still be indicated as "rated" power (and the rated power as "objective" power). This wording will be corrected in future editions of these standards.

NOTE In the USA, additional product marking is required.

Marking shall be legible and durable.

Compliance is checked on unused lamps as follows:

- a) presence and legibility by visual inspection;
- b) durability by rubbing the area of the marking by hand for a period of 15 s, with a smooth cloth dampened with water. After this test the marking shall still be legible.

4.2.2 Additional information to be provided

In addition to the above lamp marking, all details and provisions which are necessary to ensure safe installation and use shall be given in the lamp manufacturer's instructions. Alternatively, the immediate lamp wrapping or container may be marked with the corresponding symbol as shown in Annex H.

NOTE In North America, a suitable cautionary notice is required. Additional use of symbols is optional.

If applicable, information shall be given about:

- a) the provision that the lamp shall be operated in an enclosed luminaire only (for symbol, see Clause H.2);
- b) the hazard associated with a high level of UV radiation emitted by the lamp (for symbol, see Clause H.3). The value of the specified ultraviolet hazard efficacy of luminous radiation shall be made available for proper luminaire design (see Clause F.5) if it exceeds 6 mW/klm for non-reflector lamps or 6 mW/(m²·klx) for a reflector lamp;
- c) the hazard associated with a high blue light radiance (for symbol see Clause H.6). The threshold illuminance below which the luminaire cannot exceed risk group 1 for blue light shall be made available for luminaire design if the lamp is in risk group 2 (see Clause F.5); <https://standards.iteh.ai/catalog/standards/sist/bd85fa17-3d4c-49f0-abd5-21559025eab/iec-62035-2014>
- d) the risk of the occurrence of a rectifying effect at the end of lamp life;
- e) the hazard(s) that exist(s) when the outer envelope is broken (for symbol, see Clause H.4).

4.3 Mechanical requirements

4.3.1 Requirements for caps

4.3.1.1 Dimensions

If lamps use standardized caps, they shall be in accordance with the requirements on the cap data sheets of IEC 60061-1, listed in Table A.1 of this standard. Non-standardized caps shall be in line with the lamp manufacturer's documentation.

Compliance is checked on finished lamps by gauging and/or measurement. For standardized caps, the gauges of IEC 60061-3, listed in Table A.1 of this standard shall be used.

4.3.1.2 Creepage distance

The minimum creepage distance between contact pin(s) or contacts and a touchable metal shell of the cap shall be in accordance with the requirements of IEC 60061-4.

Compliance is checked by measurement.

4.3.1.3 Caps provided with keys

For lamps using cap types incorporating keys which ensure non-interchangeability with similar lamp types, the correct cap/key version shall be used.

Compliance is checked by visual inspection.

4.3.2 Construction and assembly

4.3.2.1 General

Caps shall be so constructed and assembled to the bulbs that the whole assembly remains intact and attached during and after normal operation.

Compliance is checked by carrying out the following tests.

4.3.2.2 Resistance to pull

Where lamps are so constructed that when being withdrawn from the lampholder a pull is exerted and withstood without the cap or any part of the cap or bulb being loosened or pulled apart.

Compliance is checked by the following pull test.

A pull in the direction of the lamp axis shall be applied for 1 min to:

- a) unused lamps,
- b) lamps after storage in a heating cabinet for a period of $2\,000\text{ h} \pm 50\text{ h}$.

The pull values and heating cabinet temperatures are given in Table B.1.

Care shall be taken that the means (clamp, etc.) of applying the pull to the lamp does not weaken the structure.

The pull shall be increased progressively from zero to the value given in Table B.1. The pull shall not be applied with a jerk.

4.3.2.3 Resistance to torque

Where lamps are so constructed that, during insertion into or withdrawal from, the lampholder, a torque is applied to the cap or parts of the cap or to the cap/bulb connection, the torque shall be withstood without any loosening of the connections. For mechanically fixed screw caps, an angular displacement between cap and bulb of not more than 10° is allowed.

Compliance is checked by the following torsion test.

A torque shall be applied to:

- a) unused lamps,
- b) lamps after storage in a heating cabinet for a period of $2\,000\text{ h} \pm 50\text{ h}$.

The torque values and the heating cabinet temperatures are given in Table B.2. The torsion test holders are specified in Figures C.1 and C.2.

Before each use, the test holder for screw caps shall be checked to ensure that it is clean and completely free of lubricants and grease. The cap of the test lamp shall be placed in the appropriate holder. Either the cap or the bulb may be mechanically clamped.

For some mechanically fixed screw caps, for example those positioned on a screw thread shaped sealing area, it is necessary to clamp the shell and to apply the torque in both directions.

The torque shall be increased progressively from zero to the value given in Table B.2. The torque shall not be applied with a jerk.

4.4 Electrical requirements

4.4.1 Parts which can become accidentally live

Metal parts intended to be insulated from live parts shall not be or become live. Any movable conductive material shall be placed, without the use of a tool, in the most onerous position before inspection.

On bayonet caps, any projection from the contact plate shall not come within 1 mm of metal parts intended to be insulated.

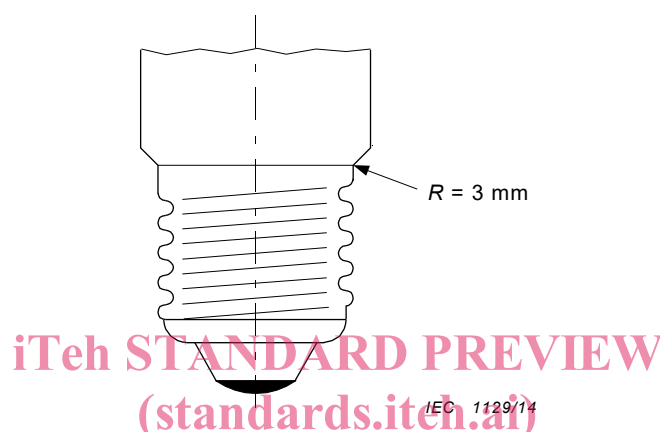


Figure 1 – Edison screw-capped lamp

On Edison screw caps any projection from the cap shell shall not project more than 3 mm from the surface of the cap (see Figure 1).

Compliance is checked by either an appropriate automatic system or by visual inspection. In addition, there shall be regular daily checks of the equipment or a verification of the effectiveness of the inspection.

4.4.2 Insulation resistance

Lamps where the metal shell of the cap can be touched after insertion into the holder shall have an insulation resistance between the metal shell of the cap and the pin(s) or contacts of not less than 2 MΩ.

Compliance is checked by measurement with suitable test equipment using a d.c. voltage of 500 V.

4.4.3 Electric strength

The insulation between the same parts as those referred to in 4.4.2 shall have sufficient (di)electric strength.

Compliance is checked with a 1 500 V a.c. voltage of substantially sine-wave form, with a frequency of 50 Hz or 60 Hz and applied for 1 min. Initially, not more than half the prescribed voltage shall be applied. The voltage shall then be raised rapidly to the full value.

No flash-over or breakdown shall occur during the test. Glow discharges without a drop in voltage are neglected.