

---

---

## Grooved pins — Half-length taper grooved

*Goupilles cannelées à cannelures progressives sur la moitié de la longueur  
(débouchantes)*

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO 8745:1997](https://standards.iteh.ai/catalog/standards/sist/864e596b-17c2-4643-af34-22cada872e35/iso-8745-1997)

[https://standards.iteh.ai/catalog/standards/sist/864e596b-17c2-4643-af34-  
22cada872e35/iso-8745-1997](https://standards.iteh.ai/catalog/standards/sist/864e596b-17c2-4643-af34-22cada872e35/iso-8745-1997)



## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 8745 was prepared by Technical Committee ISO/TC 2, *Fasteners*.

This second edition cancels and replaces the first edition (ISO 8745:1986), which has been technically revised.

**STANDARD PREVIEW**  
**(standards.iteh.ai)**  
<https://standards.iteh.ai/catalog/standards/sist/864e596b-17c2-4643-af34-22cada872e35/iso-8745-1997>

© ISO 1997

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
Case postale 56 • CH-1211 Genève 20 • Switzerland  
Internet central@iso.ch  
X.400 c=ch; a=400net; p=iso; o=isocs; s=central

Printed in Switzerland

# Grooved pins — Half-length taper grooved

## 1 Scope

This International Standard specifies the characteristics of half-length taper grooved pins made of steel or austenitic stainless steel which have three equally spaced grooves impressed longitudinally on their exterior surface, with nominal diameter,  $d_1$ , from 1,5 mm to 25 mm inclusive.

The displaced material to each side of the grooves forming an expanded diameter,  $d_2$ , which is larger than the nominal diameter  $d_1$  will cause a non-positive locking fit when these grooved pins are forced into a drilled hole equal to the nominal diameter  $d_1$  (see clause 4).

## 2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 3269:1988, *Fasteners – Acceptance inspection*.

ISO 3506-1:1997, *Corrosion-resistant stainless steel fasteners – Part 1: Bolts, screws and studs*.


ISO 4042:–<sup>1)</sup>, *Fasteners – Electroplated coatings*. [ISO 8745:1997](https://standards.iteh.ai/catalog/standards/sist/864e596b-17c2-4643-af34-22ca0a872e35/iso-8745-1997)

ISO 8749:1986, *Pins and grooved pins – Shear test*.

ISO 9717:1990, *Phosphate conversion coatings for metals – Method of specifying requirements*.

## 3 Dimensions

See figure 1 and table 1.

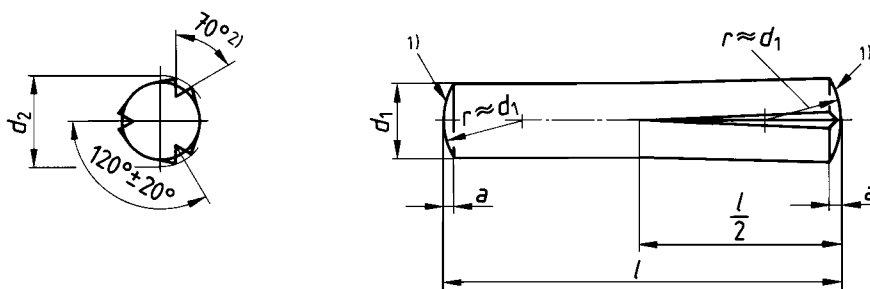

- 1) Chamfer permissible
- 2) The grooving angle  $70^\circ$  applies only to grooved pins made from steel as shown in clause 5. The grooving angle may be modified depending on resilience of material

Figure 1

1) To be published. (Revision of ISO 4042:1989)

Table 1 — Dimensions

Dimensions in millimetres

| $d_1$  |        | nom.   | 1,5                              | 2     | 2,5  | 3    | 4    | 5     | 6     | 8     | 10    | 12    | 16    | 20   | 25   |
|--|--------|--------|----------------------------------|-------|------|------|------|-------|-------|-------|-------|-------|-------|------|------|
|  |        | tol.   | h9                               |       |      |      | h11  |       |       |       |       |       |       |      |      |
| $a$  |        | ≈      | 0,2                              | 0,25  | 0,3  | 0,4  | 0,5  | 0,63  | 0,8   | 1     | 1,2   | 1,6   | 2     | 2,5  | 3    |
| Minimum shear strength, double <sup>1)</sup><br>kN |        |        | 1,6                              | 2,84  | 4,4  | 6,4  | 11,3 | 17,6  | 25,4  | 45,2  | 70,4  | 101,8 | 181   | 283  | 444  |
| $l^{2)}$   |        |        | Expanded diameter, $d_2^{3),4)}$ |       |      |      |      |       |       |       |       |       |       |      |      |
| nom.   | min.   | max.   | +0,05<br>0                       | ±0,05 |      |      |      |       |       | ±0,1  |       |       |       |      |      |
| 8  | 7,75   | 8,25   | 1,63                             | 2,65  | 3,2  | 4,25 | 5,25 | 6,25  | 8,25  | 10,3  | 12,3  | 16,5  | 20,55 | 25,5 | 3,25 |
| 10   | 9,75   | 10,25  |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 12   | 11,5   | 12,5   |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 14   | 13,5   | 14,5   | 2,15                             | 2,7   | 3,25 | 4,3  | 5,3  | 6,3   | 8,3   | 10,35 | 12,35 | 16,5  | 20,55 | 25,5 | 3,25 |
| 16   | 15,5   | 16,5   |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 18   | 17,5   | 18,5   |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 20   | 19,5   | 20,5   | 2,7                              | 3,3   | 4,35 | 5,35 | 6,35 | 8,35  | 10,4  | 12,4  | 16,55 | 20,6  | 25,6  | 3,25 |      |
| 22   | 21,5   | 22,5   |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 24   | 23,5   | 24,5   |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 26   | 25,5   | 26,5   | 3,3                              | 4,35  | 5,35 | 6,35 | 8,35 | 10,4  | 12,4  | 16,55 | 20,6  | 25,6  | 3,25  |      |      |
| 28   | 27,5   | 28,5   |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 30   | 29,5   | 30,5   |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 32   | 31,5   | 32,5   | 3,3                              | 4,35  | 5,35 | 6,35 | 8,35 | 10,4  | 12,4  | 16,55 | 20,6  | 25,6  | 3,25  |      |      |
| 35   | 34,5   | 35,5   |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 40   | 39,5   | 40,5   |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 45   | 44,5   | 45,5   | 3,3                              | 4,35  | 5,35 | 6,35 | 8,35 | 10,4  | 12,4  | 16,55 | 20,6  | 25,6  | 3,25  |      |      |
| 50   | 49,5   | 50,5   |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 55   | 54,25  | 55,75  |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 60   | 59,25  | 60,75  | 3,3                              | 4,35  | 5,35 | 6,35 | 8,35 | 10,4  | 12,4  | 16,55 | 20,6  | 25,6  | 3,25  |      |      |
| 65   | 64,25  | 65,75  |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 70   | 69,25  | 70,75  |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 75   | 74,25  | 75,75  | 3,3                              | 4,35  | 5,35 | 6,35 | 8,35 | 10,4  | 12,4  | 16,55 | 20,6  | 25,6  | 3,25  |      |      |
| 80   | 79,25  | 80,75  |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 85   | 84,25  | 85,75  |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 90   | 89,25  | 90,75  | 3,3                              | 4,35  | 5,35 | 6,35 | 8,35 | 10,4  | 12,4  | 16,55 | 20,6  | 25,6  | 3,25  |      |      |
| 95   | 94,25  | 95,75  |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 100  | 99,25  | 100,75 |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 120  | 119,25 | 120,75 | 3,3                              | 4,35  | 5,35 | 6,35 | 8,35 | 10,35 | 12,35 | 16,55 | 20,6  | 25,6  | 3,25  |      |      |
| 140  | 139,25 | 140,75 |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 160  | 159,25 | 160,75 |                                  |       |      |      |      |       |       |       |       |       |       |      |      |
| 180  | 179,25 | 180,75 | 3,3                              | 4,35  | 5,35 | 6,35 | 8,35 | 10,35 | 12,35 | 16,55 | 20,6  | 25,6  | 3,25  |      |      |
| 200  | 199,25 | 200,75 |                                  |       |      |      |      |       |       |       |       |       |       |      |      |

iTech STANDARD PREVIEW  
(standards.itech.ai)

ISO 8745:1997  
<https://standards.itech.ai/catalog/standards/sis/864e596b-17c2-4643-a34-22cadu872e33/iso-8745-1997>

- 1) Applies only to grooved pins made from steel as shown in clause 5.
- 2) The range of commercial lengths is between the stepped lines.
- 3) The expanded diameter  $d_2$  applies only to pins made from steel as shown in clause 5. For other materials, for example stainless steel, a reduction amount shall be subtracted from the given values and should be agreed between customer and supplier.
- 4) For testing  $d_2$ , a GO/NO GO ring gauge should be used.

#### 4 Application

The diameter of the hole into which the groove pin is to be inserted shall be equal to the nominal diameter  $d_1$  of the mating pin and to tolerance class H11.

## 5 Requirements and reference International Standards

See table 2.

Table 2 — Requirements and reference International Standards

| Material <sup>1)</sup>                                      | Steel (St)   | Austenitic stainless steel                         |
|---|--|--|
|   |  | Hardness 125 HV30 to 245 HV30                      |
| Grooves   | Form of groove at the discretion of the supplier.  |  |
| Surface finish  | Plain, i.e. pins to be supplied in natural finish treated with a protective lubricant, unless otherwise specified by agreement between customer and supplier.  | Plain, i.e. pins to be supplied in natural finish. |
|   | Preferred coatings are black oxide, phosphate coating or zinc plating with chromate conversion coating (see ISO 9717 and ISO 4042).<br><br>Other coatings as agreed between customer and supplier.<br><br>All tolerances shall apply prior to the application of a plating or coating. |  |
| Workmanship   | Pins shall be free of irregularities or detrimental defects.   |  |
| Shear strength test   | The test shall be in accordance with ISO 8749.   |  |
| Acceptability   | The acceptance procedure is covered in ISO 3269.   |  |
| 1) Other materials as agreed between customer and supplier. |  |  |

## 6 Designation

### EXAMPLE 1

A half-length taper grooved steel pin with nominal diameter  $d_1 = 6$  mm and nominal length  $l = 50$  mm is designated as follows:

**Grooved pin ISO 8745 – 6 × 50 – St**

### EXAMPLE 2

A half-length taper grooved austenitic stainless steel pin of grade A1, with nominal diameter  $d_1 = 6$  mm and nominal length  $l = 50$  mm is designated as follows:

**Grooved pin ISO 8745 – 6 × 50 – A1**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO 8745:1997](#)

<https://standards.iteh.ai/catalog/standards/sist/864e596b-17c2-4643-af34-22cada872e35/iso-8745-1997>

---

---

**ICS 21.060.50**

**Descriptors:** fasteners, steel products, pins (mechanics), grooved pins, specifications, characteristics, dimensions, designation.

Price based on 3 pages

---

---