

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Luminaire – **iTeh STANDARD PREVIEW**
Part 2-8: Particular requirements – Handlamps
(standards.iteh.ai)

Luminaire –
Partie 2-8: Exigences particulières – Baladeuses
IEC 60598-2-8:2013
<https://standards.iteh.ai/catalog/standards/sist/1c5a556a-09a8-4b1a-a0f4-0ead3a19bc79/iec-60598-2-8-2013>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2013 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...).

It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Liens utiles:

Recherche de publications CEI - www.iec.ch/searchpub

La recherche avancée vous permet de trouver des publications CEI en utilisant différents critères (numéro de référence, texte, comité d'études,...).

Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

Just Published CEI - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications de la CEI. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (VEI) en ligne.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.



IEC 60598-2-8

Edition 3.0 2013-04

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Luminaire –

Part 2-8: Particular requirements – Handlamps

Luminaire –

Partie 2-8: Exigences particulières – Baladeuses

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX

N

ICS 29.140.40

ISBN 978-2-83220-789-5

Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

CONTENTS

FOREWORD	3
8.1 Scope	5
8.2 Normative references	5
8.3 Terms and definitions	5
8.4 General test requirements	6
8.5 Classification of luminaires	6
8.6 Marking	6
8.7 Construction	7
8.8 Creepage distances and clearances	9
8.9 Provision for earthing	9
8.10 Terminals	9
8.11 External and internal wiring	9
8.12 Protection against electric shock	11
8.13 Endurance tests and thermal tests	11
8.14 Resistance to dust and moisture	12
8.15 Insulation resistance and electric strength	12
8.16 Resistance to heat, fire and tracking	12
Figure 1 – Arrangement for impact test for handlamps	8
Figure 2 – Apparatus for flexing test	13
Figure 3 – Crush test apparatus	14

INTERNATIONAL ELECTROTECHNICAL COMMISSION

LUMINAIRES –

Part 2-8: Particular requirements –
Handlamps

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60598-2-8 has been prepared by subcommittee 34D: Luminaires, of IEC technical committee 34: Lamps and related equipment.

This third edition cancels and replaces the second edition, published in 1996, its Amendment 1 (2000) and its Amendment 2 (2007). It constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition.

- a) The requirements have been updated to make them consistent and to solve contradicting requirements introduced in the Amendment 2. In that amendment, a requirement was introduced specifying that handlamp shall always be classified as rough service luminaire only. The implication of this statement was that according to 4.13.4 of Part 1 this kind of luminaire shall always be IP54. This requirements is in contradiction with several points of this Part 2 where it is considered acceptable for ordinary luminaires (e.g. 8.11.1, 8.11.2 and 8.13.1).

- b) Furthermore, the contradiction between the requirement in 8.7.1 and 8.7.2 regarding the type of material used for the protective cover has been corrected.

This standard is intended to be read in conjunction with IEC 60598-1 *Luminaires – Part 1: General requirements and tests*. It was established on the basis of the seventh edition (2008) of that standard.

The text of this standard is based on the following documents:

FDIS	Report on voting
34D/1090/FDIS	34D/1097/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 60598 series, published under the general title *Luminaires*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or [IEC 60598-2-8:2013](http://standards.iteh.ai/catalog/standards/sist/1c5a356a-09a8-4b1a-a0f4-0ead3a19bc79/iec-60598-2-8-2013)
- amended. <http://standards.iteh.ai/catalog/standards/sist/1c5a356a-09a8-4b1a-a0f4-0ead3a19bc79/iec-60598-2-8-2013>

LUMINAIRES –

Part 2-8: Particular requirements – Handlamps

8.1 Scope

This part of the IEC 60598 series specifies requirements for handlamps and similar portable luminaires which are held in the hand, hooked up or resting on a surface for use with electric light sources on supply voltages not exceeding 250 V. It is to be read in conjunction with those sections of Part 1 to which reference is made.

Handlamps which can be fixed to a support by means of a wing screw, clip or magnet, and luminaires intended for inspection of the interior of barrels, are within the scope of this part of IEC 60598.

8.2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60227 (all parts) *Polyvinyl chloride insulated cables of rated voltages up to and including 450/750 V*

<https://standards.iteh.ai/catalog/standards/sist/1c5a356a-09a8-4b1a-a0f4-0ead3a19bc79/iec-60598-2-8-2013>

IEC 60245 (all parts), *Rubber insulated cables – Rated voltages up to and including 450/750 V*

IEC 60598-1, *Luminaires – Part 1: General requirements and tests*

8.3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60598-1, as well as the following apply.

8.3.1

handlamp

luminaire with a handle and a flexible cable or cord, intended to be moved frequently while connected to the supply

8.3.2

rewirable handlamp

handlamp with a type X or Y attachment

8.3.3

non-rewirable handlamp

handlamp with a type Z attachment

8.3.4

sealed handlamp

handlamp of which all protective covers are sealed and which makes it impossible to replace the lamp without destroying the handlamp

8.4 General test requirements

8.4.1 The provisions of Section 0 of IEC 60598-1 apply together with the requirements of 8.4.2. The tests described in each appropriate section of Part 1 shall be carried out in the order listed in this Part 2-8.

8.4.2 The requirements of the third paragraph of 0.4.2 of Section 0 of IEC 60598-1 do not apply.

In general, four samples are necessary for the tests, three of which are subjected to the tests of 8.7.6, the fourth sample being subjected to the other tests.

All four samples shall be subjected to the test for rough service hand-held luminaires of 4.13.4 b) of IEC 60598-1.

For handlamps provided with a rubber protection cover, an additional sample is necessary for the test of 8.13.1.

Where a range of similar handlamps is involved, the specified tests are made on a representative complete set from the range. This set shall include handlamps, together with any attachments, which represents the most unfavourable combination.

8.5 Classification of luminaires

[IEC 60598-2-8:2013](https://standards.iteh.ai/catalog/standards/sist/1c5a356a-09a8-4b1a-a0f4-0ead3a19bc79/iec-60598-2-8-2013)

<https://standards.iteh.ai/catalog/standards/sist/1c5a356a-09a8-4b1a-a0f4-0ead3a19bc79/iec-60598-2-8-2013>

Luminaires shall be classified in accordance with the provisions of Section 2 of IEC 60598-1 together with the requirements of 8.5.1 and 8.5.2.

8.5.1 According to the type of protection against electric shock, handlamps shall be classified as class II or class III.

8.5.2 According to the method of connecting the cable or cord, handlamps shall be classified as:

- rewirable handlamps, or
- non-rewirable handlamps.

8.6 Marking

The provisions of Section 3 of IEC 60598-1 apply, together with the requirements of 8.6.1, and 8.6.2.

8.6.1 The symbol for class II or class III, the marking for rated voltage of class III handlamps and the symbol for the degree of protection against dust and moisture shall be on the outside of the handlamp.

This requirement is met if the marking is visible from the outside through a translucent cover.

The marking for maximum rated wattage shall not be in paint or ink, even when protected by varnish.

Compliance shall be checked by inspection and by the test described in Section 3 of IEC 60598-1.

8.6.2 For handlamps with replaceable lamps and with type X attachment, the instructions regarding the method of opening and closing the luminaire shall be marked on the protective cover and shall remain visible during and after use.

8.7 Construction

The provisions of Section 4 of IEC 60598-1 apply, together with the requirements of 8.7.1 to 8.7.6.

8.7.1 The shell and handle of the handlamp shall be of insulating material.

8.7.2 The lamp shall be protected against accidental damage by a protective grid, translucent cover or similar protective means. These devices shall be rigidly fixed to the body of the handlamp and it shall not be possible to remove the device by hand.

The protective device shall remain attached to the handlamp during the lamp replacement, e.g. by a hinge, chain or equally effective device. If an automatic switch interrupts the operation of the luminaire, when the protective device is removed for maintenance, the protective device may not be permanently attached to the luminaire.

For handlamps with magnetic ballast for tubular fluorescent lamps, the removal of the protective device shall be so arranged that the opening occurs at the end of the lamp where the lamp holder is connected to the magnetic ballast.

If the protective device is of metal, it shall be so positioned or protected by insulation that it is not likely to be inadvertently touched when holding the handle. The distance between the glass of the tungsten filament lamp or the tubular fluorescent lamp or any protective glass and a plane through the outside of two adjacent bars of a protective grid or a protective cover, shall be at least 3 mm.

Suspension hooks, if any, shall be securely fixed to the handlamp.

Compliance is checked by inspection, by measurement and by loading the hook with a weight which is twice the weight of the luminaire, including the total weight of the attached cable, cord, ballast or transformer. The hook shall not deform such that the luminaire slips from the means of suspension which for testing purposes, is a 1 mm Ø metal bar.

8.7.3 Handlamps shall not use resistive ballasts or resistive cables to limit the current in discharge lamps.

8.7.4 Lampholders for tungsten filament lamps shall be locked against rotation by at least two independent means, at least one of which shall be operable only with the aid of a tool. The means of fixing shall not serve to fix any other part.

Compliance shall be checked by inspection and by manual test.

8.7.5 Ballasts or transformers where connected in the flexible cable or cord shall be at a distance not greater than 1 m from the plug and equipped with a suspension hook.

Compliance shall be checked by inspection, by manual test and by measurement.

8.7.6 The test for mechanical strength described in 4.13 of Section 4 of IEC 60598-1 does not apply, except the test of 4.13.4 b) as mentioned in 8.4.2. In addition, the mechanical

strength shall be checked by the test described in 8.7.6.1, if applicable, and by the tests described in 8.7.6.2.

8.7.6.1 The grid, translucent covers and protective covers shall be firmly fixed.


Compliance is checked by a pull of 100 N for 1 h, applied to the parts of the body of the handlamp which, when loose, would allow to touch current-carrying parts.

For handlamps containing tubular fluorescent lamps this is likely along its longitudinal axis.

For sealed handlamps, in addition a torque test of 10 Nm shall be applied to the parts which, when loose, would allow to touch current-carrying parts.

The grid or protective covers shall remain in position during and after the test.

8.7.6.2 The handlamp, fitted with a flexible cable or cord in accordance with the requirements of 8.11.2 and of suitable length, is subjected to two impact tests in which it is caused to swing against a steel bar which is mounted on a solid wall of brick, stone, concrete or similar material, as shown in Figure 1.

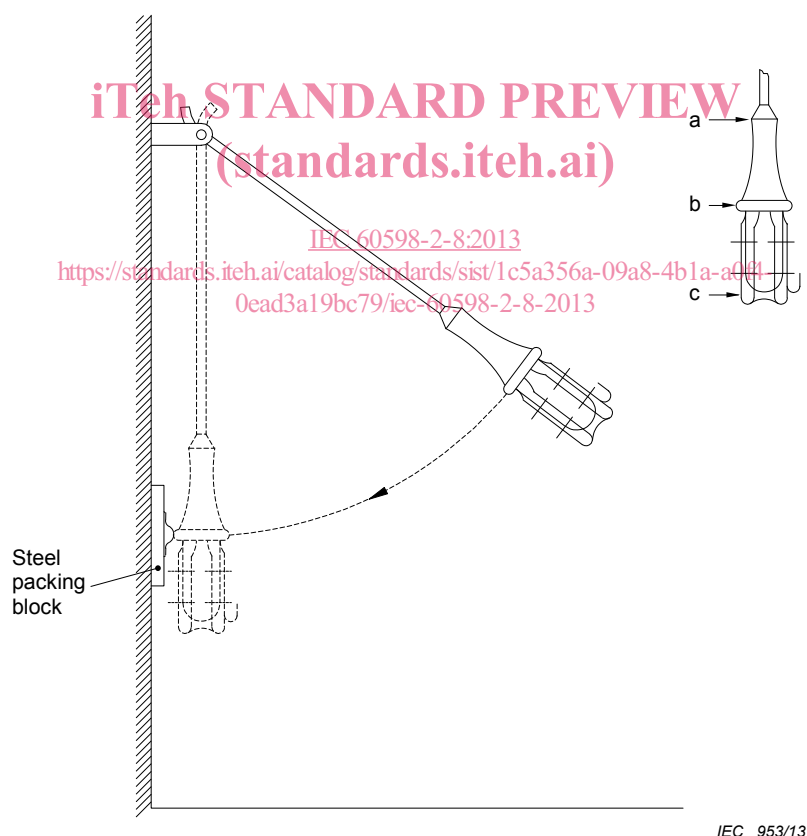

The steel packing block is necessary only if the shape of the handlamp is such that, without it, the handlamp does not hit the bar.

For the key and further explanations, see 8.7.6.2.

Figure 1 – Arrangement for impact test for handlamps

The bar is of 40 mm × 40 mm × 5 mm right-angle section with the corner rounded to a radius of 5 mm. It is mounted in contact with the wall or, if necessary, in contact with a steel packing block which is in contact with the wall.

The handlamp, without lamp, is suspended by its flexible cable or cord so that the point "a", indicated in Figure 1, rests against the corner of the bar, the point of suspension being 400 mm above the bar. It is then drawn away from the bar in a plane perpendicular to the wall until the cable or cord is horizontal.

The sample is allowed to fall against the bar three times in this way. It is then suspended so that the impact is at the point "b", and caused to fall similarly three times, followed by three falls against the point "c".

After this first test, the sample shall show no damage impairing its safety or further use. The whole of the above test is then repeated but with the point of suspension 1 m above the bar.

After this second test, the sample shall show no damage impairing its safety or further use. The means protecting the lamp against damage shall not have loosened, even if it has become deformed. Breakage of the protective glass of translucent cover, if any, is neglected, if it is not the sole means protecting the lamp against damage.

8.8 Creepage distances and clearances

The provisions of Section 11 of IEC 60598-1 apply.

8.9 Provision for earthing

The provisions of Section 7 of IEC 60598-1 do not apply.

8.10 Terminals

The provisions of Sections 14 and 15 of IEC 60598-1 apply, together with the requirements of 8.10.1.

8.10.1 Terminals for supply connection shall be suitable for the connection of conductors having nominal cross-sectional areas from 0,75 mm² to 1,5 mm².

Compliance shall be checked by fitting conductors of the smallest and largest cross-sectional areas specified.

8.11 External and internal wiring

The provisions of Section 5 of IEC 60598-1 apply, together with the requirements of 8.11.1 to 8.11.6.

8.11.1 Rewirable handlamps shall be equipped with type X attachment.

Non-rewirable handlamps shall be equipped with type Y or Z attachment.

Handlamps shall not be provided with socket-outlets.

Handlamps other than ordinary shall not be provided with appliance inlets. Where ordinary handlamps are provided with appliance inlets, they shall have mechanical locking.

Compliance shall be checked by inspection.

8.11.2 Flexible cables or cords shall be not lighter than the following types specified in:

- 60227 IEC 53 for ordinary handlamps,
- 60245 IEC 57 for other than ordinary handlamps.

The nominal cross-sectional area of the conductors shall be not less than:

- 0,75 mm² for ordinary handlamps,
- 1 mm² for other handlamps.

Compliance shall be checked by inspection.

NOTE In Australia and New Zealand, different cable materials and requirements apply. Refer to the regional standard.

8.11.3 Handlamps shall have only one cable entry.

Compliance shall be checked by inspection.

8.11.4 The requirements of 5.2.7 and 5.2.8 of Section 5 of IEC 60598-1 do not apply.

Flexible cables and cords shall be protected against excessive bending at the inlet opening of the handlamp and the plug-ballast/transformer (where applicable) by means of a cord guard of insulating material or a suitably shaped inlet opening.

For cord guards,

- they shall not be integral with the flexible cable or cord, for rewirable handlamps;
- they shall be fixed in a reliable manner so that they cannot readily be lost;
- they shall project outside the handlamp for a distance of at least 25 mm beyond the inlet opening;
- they shall have adequate mechanical strength and elasticity.

Compliance shall be checked by inspection, by measurement and by the tests described in 8.11.4.1.

8.11.4.1 For non-rewirable handlamps and for rewirable handlamps, the part of the handlamp carrying the cable entry is fixed to the oscillating member of an apparatus similar to that shown in Figure 2, so that when this is at the middle of its travel the axis of the flexible cable or cord, where it enters the sample, is vertical and passes through the axis of oscillation.

The cable or cord is loaded with a weight such that the force applied is 20 N.

A current, the value of which is derived from the maximum rated wattage and the rated voltage, is passed through the conductors, the voltage between the contacts of the lampholder being equal to the rated voltage.

The oscillating member is moved backwards and forwards through an angle of 90° (45° on either side of the vertical), the number of flexings being 20 000 and the rate of flexing 60 per minute.

After the test, not more than 50 % of the strands in a conductor shall be broken, and the cord or cable shall be subjected to, and shall satisfy, the insulation resistance and high-voltage tests specified in Section 10 of IEC 60598-1.

NOTE A flexing is one movement, either backwards or forwards.