

INTERNATIONAL STANDARD



Protection against lightning – Thunderstorm warning systems

(<https://standards.iteh.ai>)

Document Preview

IEC 62793:2016

<https://standards.iteh.ai/catalog/standards/iec/941c138-533d-40ea-935c-e9b9b7737b54/iec-62793-2016>

WITHDRAWN





THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2016 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

IEC 62793:2016

<https://standards.iteh.ai/catalog/standards/iec/941c138-533d-40ca-935c-e9b9b7737b54/iec-62793-2016>

INTERNATIONAL STANDARD



Protection against lightning – Thunderstorm warning systems

(<https://standards.iteh.ai>)
Document Preview

IEC 62793:2016

<https://standards.iteh.ai/catalog/standards/iec/941c138-533d-40ea-935c-e9b9b7737b54/iec-62793-2016>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 29.020; 91.120.40

ISBN 978-2-8322-3352-8


Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	5
INTRODUCTION.....	7
1 Scope.....	8
2 Normative references.....	9
3 Terms, definitions and abbreviations	9
3.1 Terms and definitions	9
3.2 Abbreviations	12
4 Thunderstorm phases and detectable phenomena for alarming.....	13
4.1 Introductory remark	13
4.2 Phase 1 – Initial phase (cumulus stage).....	13
4.3 Phase 2 – Growth phase	13
4.4 Phase 3 – Mature phase.....	13
4.5 Phase 4 – Dissipation phase	13
5 Classification of thunderstorm detection devices and their properties.....	14
6 Alarm method	15
6.1 General.....	15
6.2 Areas.....	16
6.2.1 Target area (TA)	16
6.2.2 Surrounding area (SA)	16
6.2.3 Monitoring area (MA)	17
6.2.4 Coverage area (CA)	17
6.3 Alarm triggering	17
6.4 Alarm information delivery.....	19
7 Installation and maintenance.....	19
8 Alarm evaluation.....	19
8.1 General.....	19
8.2 Evaluation of TWS by using lightning location data	21
8.3 Fine tuning of TWS by processing archived data.....	21
9 Thunderstorms warning systems application guide	21
9.1 General.....	21
9.2 Procedure	22
9.2.1 General	22
9.2.2 Step 1 – Identification of hazardous situations	22
9.2.3 Step 2 – Determination of type of loss	22
9.2.4 Step 3 – Risk control.....	23
Annex A (informative) Overview of the lightning phenomena	25
A.1 Origin of thunderclouds and electrification.....	25
A.2 Lightning phenomena.....	25
A.3 Electric thunderstorm and lightning characteristics useful for prevention	26
A.3.1 Electrostatic field.....	26
A.3.2 Electromagnetic fields	27
A.3.3 Other parameters useful in lightning detection.....	27
Annex B (informative) Thunderstorm detection techniques	28
B.1 Introductory remarks	28
B.2 Detection techniques and parameters to qualify a sensor.....	28

B.2.1	General	28
B.2.2	Class A.....	28
B.2.3	Class B.....	29
B.2.4	Class C.....	29
B.2.5	Class D.....	29
B.3	Location techniques	29
B.3.1	General	29
B.3.2	Multi-sensor location techniques	29
B.3.3	Single sensor techniques	30
B.4	Thunderstorm detectors evaluation	31
B.5	Choosing a thunderstorm detection system	31
Annex C (informative)	Examples of application of thunderstorm warning systems	32
C.1	Example n° 1 – Telecommunication tower	32
C.1.1	Step 1: Identification of hazardous situations	32
C.1.2	Step 2: Determination of type of loss	32
C.1.3	Step 3: Risk control.....	33
C.2	Example n° 2 – Golf course	33
C.2.1	Step 1: Identification of hazardous situations	33
C.2.2	Step 2: Determination of type of loss	34
C.2.3	Step 3: Risk control.....	35
Annex D (informative)	Catalogue of possible recommended preventive actions to be taken.....	36
Annex E (informative)	Example of TWS evaluation on a wind turbine site	38
Annex F (informative)	How to test thunderstorm detectors	40
F.1	General.....	40
F.2	Laboratory tests	40
F.2.1	General	40
F.2.2	Resistance to UV radiation tests (for non-metallic sensor housing).....	40
F.2.3	Resistance tests to corrosion (for metallic parts of sensor).....	41
F.2.4	Mechanical tests	41
F.2.5	Index of protection confirmation (IP Code).....	42
F.2.6	Electric tests	42
F.2.7	Marking test.....	43
F.2.8	Electromagnetic compatibility (EMC)	43
F.3	Optional tests on an open air platform under natural lightning conditions	43
Bibliography	47
Figure 1	– Examples of different target area shapes	16
Figure 2	– Example of the distribution of the coverage area (CA), the monitoring area (MA), the target area (TA), and surrounding area (SA).....	17
Figure 3	– Example of an alarm.....	18
Figure A.1	– Standard lightning classifications.....	26
Figure D.1	– Procedure flow chart.....	37
Figure E.1	– Lightning activity around the site for a period of eight years	38
Figure F.1	– Difference in electric field measurement during one thunderstorm event.....	45
Table 1	– Lightning detector properties	15

Table 2 – Contingency table.....	20
Table 3 – Identification of hazardous situations	22
Table 4 – Loss concerning people	23
Table 5 – Loss concerning goods	23
Table 6 – Loss concerning services.....	23
Table 7 – Loss concerning environment.....	23
Table 8 – Risk control	24
Table C.1 – Identification of hazardous situations	32
Table C.2 – Loss concerning goods.....	32
Table C.3 – Loss concerning services	33
Table C.4 – Loss concerning environment	33
Table C.5 – Risk control.....	33
Table C.6 – Identification of hazardous situations	34
Table C.7 – Loss concerning people.....	34
Table C.8 – Loss concerning goods.....	34
Table C.9 – Loss concerning services	34
Table C.10 – Loss concerning environment	35
Table C.11 – Risk control.....	35
Table E.1 – Results of TWS evaluation based on archived lightning data for an 8-year period (2000 to 2007), when some of the key parameters (size of MA, trigger parameters and dwell time) were varied	39

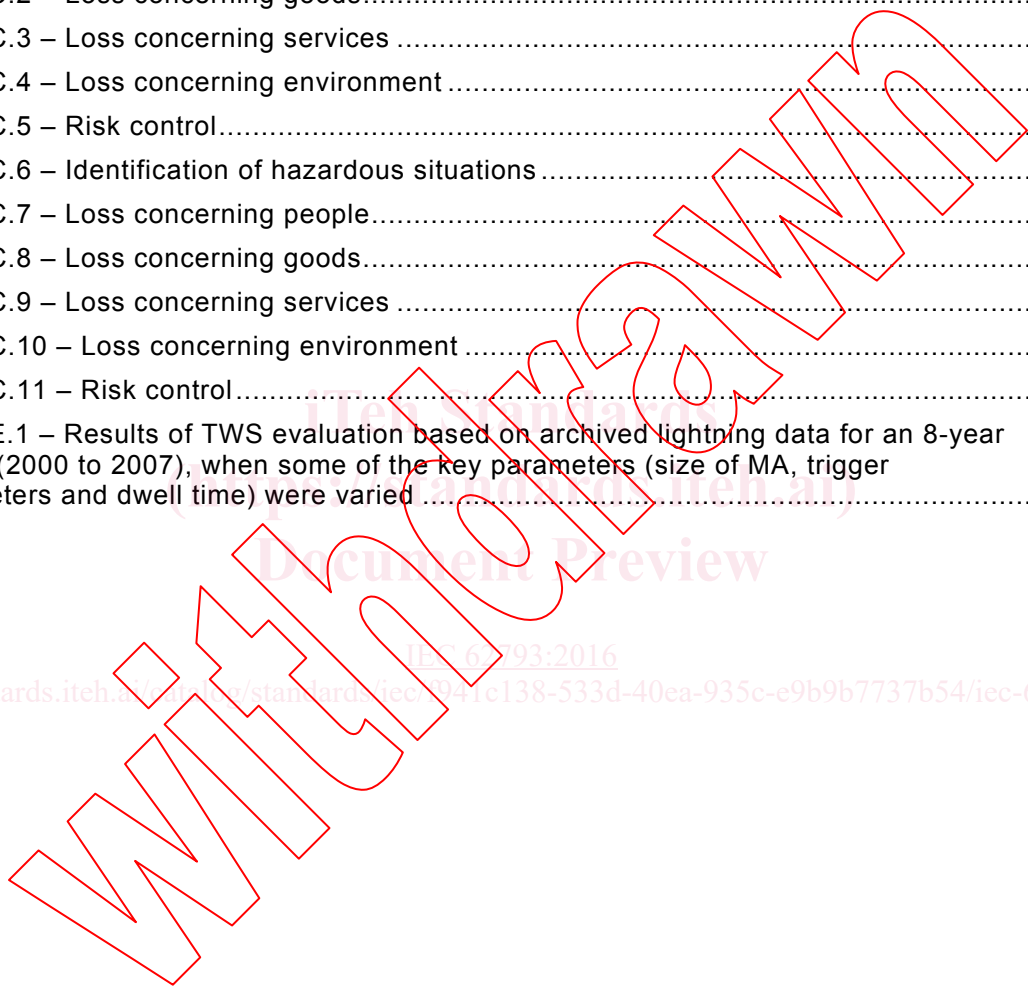

Document Preview

IEC 62793:2016

<https://standards.iteh.ai/catalog/standards/iec/941c138-533d-40ea-935c-e9b9b7737b54/iec-62793-2016>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**PROTECTION AGAINST LIGHTNING –
THUNDERSTORM WARNING SYSTEMS**
FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62793 has been prepared by IEC technical committee 81: Lightning protection.

The text of this standard is based on the following documents:

FDIS	Report on voting
81/508/FDIS	81/519/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

iTech Standards
(<https://standards.iteh.ai>)
Document Preview

IEC 62793:2016

<https://standards.iteh.ai/catalog/standards/iec/941c138-533d-40ea-935c-e9b9b7737b54/iec-62793-2016>

WITHDRAWN

INTRODUCTION

Natural atmospheric electric activity and, in particular, cloud-to-ground lightning poses a serious threat to living beings and property. Every year severe injuries and even deaths of humans are caused as a result of direct or indirect lightning strikes.

Lightning:

- may affect sport, cultural and political events attracting large concentrations of people; events may have to be suspended and people evacuated in the case of a risk of thunderstorm;
- may affect industrial activities by creating power outages and unplanned interruptions of production processes;
- may interrupt all kinds of traffic (people, energy, information, etc.);
- has led to a steady increase in the number of accidents per year due to the wider use of electric components that are sensitive to the effects of lightning (in industry, transportation and communication);
- may be a hazard for activities with an environmental risk, for example handling of sensitive, inflammable, explosive or chemical products;
- may be a cause of fire.

During the last decades, technical systems including systems devoted to real-time monitoring of natural atmospheric electric activity and lightning, have experienced an extraordinary development. These systems can provide high quality and valuable information in real-time of the thunderstorm occurrence, making it possible to achieve information which can be extremely valuable if coordinated with a detailed plan of action.

Although this information allows the user to adopt anticipated temporary preventive measures, it should be noted that all the measures to be taken based on monitoring information are the responsibility of the system user according to the relevant regulations. The effectiveness will depend largely on the risk involved and the planned decisions to be taken. This International Standard gives an informative list of possible actions.

Lightning and thunderstorms, as with many natural phenomena, are subject to statistical uncertainty. It is not possible therefore to achieve precise information on when and where lightning will strike.

Other lightning protection standards do not cover the use of thunderstorm warning systems.

PROTECTION AGAINST LIGHTNING – THUNDERSTORM WARNING SYSTEMS

1 Scope

This International Standard describes the characteristics of thunderstorm warning systems and evaluation of the usefulness of lightning real time data and/or storm electrification data in order to implement lightning hazard preventive measures.

This standard provides the basic requirements for sensors and networks collecting accurate data of the relevant parameters, giving real-time information of lightning tracks and range. It describes the application of the data collected by these sensors and networks in the form of warnings and historical data.

This standard applies to the use of information from thunderstorm warning systems (systems or equipment providing real-time information) on atmospheric electric activity in order to monitor preventive measures.

This standard includes:

- a general description of available lightning and storm electrification hazard warning systems;
- a classification of thunderstorm detection devices and properties;
- guidelines for alarming methods;
- a procedure to determine the usefulness of thunderstorm information;
- some informative examples of possible preventive actions.

The following aspects are outside the scope of this standard:

- a) lightning protection systems; such systems are covered by the IEC 62305 series;
- b) other thunderstorm related phenomena such as rain, hail, wind;
- c) satellite and radar thunderstorm detection techniques.

A non-exhaustive list of situations to which this standard could be applicable is given below:

- people in open areas involved in activities such as maintenance, labour, sports, competitions, agriculture and fisheries or situations where large crowds gather;
- wind farms, large solar power systems, power lines;
- occupational health and safety prevention;
- sensitive equipment such as computer systems, emergency systems, alarms and safety equipment;
- operational and industrial processes;
- storage, processing and transportation of hazardous substances (e.g. flammable, radioactive, toxic and explosive substances);
- determined environments or activities with special danger of electrostatic discharges (e.g. space and flight vehicle operations);
- operations in which the continuity of the basic services is very important (e.g. telecommunications, the generation, transport and distribution of energy, sanitary services and emergency services);
- infrastructures: ports, airports, railroads, motorways and cableways;

- civil defense of the environment: forest fires, land slide and floods;
- wide networks (e.g. power lines, telecommunication lines) may also benefit from having early detection of thunderstorms.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62305 (all parts), *Protection against lightning*

3 Terms, definitions and abbreviations

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1.1

alarm

information indicating that the target or the surrounding area is likely to be affected by thunderstorms and the accompanying lightning related events

3.1.2

cloud-to-ground lightning

CG

electric discharge of atmospheric origin that is comprised of one or more cloud-to-ground lightning strokes that propagate from cloud to ground or vice versa and lead to a net transfer of charge between cloud and ground

3.1.3

coverage area

CA

area where a given warning equipment has a sufficient detection efficiency and/or accuracy to give a warning

3.1.4

detection efficiency

DE

percentage of cloud-to-ground discharges (flashes or strokes) that are detected and located by a sensor or a network

Note 1 to entry: As cloud-to-ground flashes are often composed of several strokes, there is a difference between flash detection efficiency and stroke detection efficiency. A flash is reported (detected) if at least one stroke (first or subsequent) is detected and therefore flash detection efficiency is always equal or higher than stroke detection efficiency.

3.1.5

dwelt time

DT

time that an alarm is sustained after all warning criteria are no longer met

3.1.6

effective alarm

EA

alarm where a lightning related event occurs in the surrounding area during the total alarm duration

3.1.7
time to clear
TTC

time between the occurrence of the last lightning related event in the monitoring area and the time when the alarm is released

3.1.8
failure to warn
FTW

occurrence of a lightning related event in the surrounding area for which no alarm occurred

3.1.9
failure to warn ratio
FTWR

ratio of failure to warn with respect to the total number of situations with lightning related events affecting the surrounding area

3.1.10
false alarm
FA

alarm not followed by lightning-related events within the surrounding area

3.1.11
false alarm ratio
false alarm rate
FAR

ratio of false alarms to the total number of alarms

3.1.12
field strength meter
FSM

device for continuous monitoring of the atmospheric electrostatic field associated with thunderstorms

EXAMPLE: Field mill.

3.1.13
cloud lightning
IC

discharge occurring within or among thunderclouds or between thunderclouds and air and which does not have a ground termination

3.1.14
lead time
LT

time between the start of an alarm and the effective occurrence of the first lightning related event in the target area

3.1.15
lightning flash

electric discharge of atmospheric origin consisting of one or more strokes

Note 1 to entry: This discharge may occur within or between clouds, between the clouds and air and between a cloud and the ground.

3.1.16
lightning related event
LRE

CG lightning flash to or near the structure to be protected, or to or near a line connected to the structure to be protected

3.1.17**lightning stroke**

single electric discharge in a lightning flash to earth

3.1.18**median location accuracy****LA**

median value of the distances between real stroke locations and the stroke locations given by the lightning location system

3.1.19**monitoring area****MA**

geographic area where the lightning activity is monitored in order to provide a valid warning for the target area

3.1.20**physical damage**

damage to a structure (or to its contents) due to mechanical, thermal, chemical or explosive effects of lightning

3.1.21**preventive actions**

actions of a temporary nature, taken on the basis of the preventive information and framed within the emergency plans of each organization which covers all that is required

3.1.22**point of strike**

point where a lightning flash strikes the earth or protruding objects (e.g. structure, lightning protection system, line, tree)

Note 1 to entry: A lightning flash may have more than one point of strike.

3.1.23**surrounding area****SA**

geographic area in which a lightning related event (LRE) causes a potential danger and which surrounds and includes the target area (TA)

Note 1 to entry: Any lightning related event occurring in the surrounding area is potentially dangerous. This area is used when evaluating a thunderstorm warning system to determine the false alarm ratio and other performance parameters.

3.1.24**target area****TA**

geographic area where a warning is needed in order to facilitate decision-making and to activate preventive actions before a lightning related event occurs in that area

3.1.25**thunderstorm**

local storm produced by atmospheric activity and accompanied by lightning and thunder

3.1.26**thunderstorm detector**

equipment capable of evaluating one or more parameters associated with the electrical characteristics of the thunderstorm

Note 1 to entry: Thunderstorm detectors may consist of a single detector or of a network of connected detectors.

**3.1.27
thunderstorm warning system**

TWS

system composed of thunderstorm detectors able to monitor the thunderstorm activity in the monitoring area and means of processing the acquired data to provide a valid alarm (warning) related to the lightning related events for a defined target area

Note 1 to entry: Some countries refer to TWS as 'lightning warning systems'.

**3.1.28
total alarm duration**

TAD

time between triggering and the end of an alarm

**3.1.29
percentage of alarms delivered**

POD_x

percentage of alarms delivered with a lead time of more than or equal to x minutes

EXAMPLE: POD₁₀ is the percentage of alarms delivered with a lead time of more than or equal to 10 min.

3.2 Abbreviations

CA	Coverage area
CG	Cloud to ground
DC	Direct current
DE	Detection efficiency
DT	Dwell time
EA	Effective alarm
EMC	Electromagnetic compatibility
EMI	Electromagnetic interference
FA	False alarm
FAR	False alarm ratio
FSM	Field strength meter
FTW	Failure to warn
FTWR	Failure to warn ratio
HV	High voltage
IC	Intercloud, intracloud or cloud to air discharges
IP	Index of protection
LA	Location accuracy
LF	Low frequencies
LLS	Lightning location system
LPS	Lightning protective system
LT	Lead time
LRE	Lightning related event
MA	Monitoring area
MCS	Mesoscale convective systems
MDF	Magnetic duration finder
OI	Optical imaging
POD _x	Percentage of alarms delivered