

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Secondary cells and batteries containing alkaline or other non-acid electrolytes – Portable sealed rechargeable single cells – Part 1: Nickel-cadmium

Accumulateurs alcalins et autres accumulateurs à électrolyte non acide – Accumulateurs individuels portables étanches – Partie 1: Nickel-cadmium



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2013 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.
If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...).

It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Liens utiles:

Recherche de publications CEI - www.iec.ch/searchpub

La recherche avancée vous permet de trouver des publications CEI en utilisant différents critères (numéro de référence, texte, comité d'études,...).

Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

Just Published CEI - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications de la CEI. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (VEI) en ligne.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Secondary cells and batteries containing alkaline or other non-acid electrolytes – Portable sealed rechargeable single cells – Part 1: Nickel-cadmium

Accumulateurs alcalins et autres accumulateurs à électrolyte non acide – Accumulateurs individuels portables étanches – Partie 1: Nickel-cadmium

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX

W

ICS 29.220.30

ISBN 978-2-8322-1122-9

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD.....	5
1 Scope.....	7
2 Normative references.....	7
3 Terms and definitions	7
4 Parameter measurement tolerances.....	8
5 Cell designation and marking	9
5.1 Cell designation.....	9
5.1.1 Small prismatic cells and cylindrical cells	9
5.1.2 Button cells.....	10
5.2 Cell termination	10
5.3 Marking	11
5.3.1 Small prismatic cells and cylindrical cells	11
5.3.2 Button cells.....	11
6 Dimensions.....	12
6.1 Small prismatic cells and cylindrical cells	12
6.1.1 General	12
6.1.2 Small prismatic cells.....	12
6.1.3 Cylindrical cells.....	13
6.2 Button cells.....	15
7 Electrical tests	16
7.1 General	16
7.2 Charging procedure for test purposes	16
7.3 Discharge performance.....	16
7.3.1 General	16
7.3.2 Discharge performance at 20 °C	16
7.3.3 Discharge performance at –18 °C	17
7.3.4 Discharge performance for rapid charge cells (R cells).....	18
7.4 Charge (capacity) retention.....	18
7.5 Endurance.....	18
7.5.1 Endurance in cycles.....	18
7.5.2 Permanent charge endurance	21
7.6 Charge acceptance at constant voltage.....	26
7.7 Overcharge.....	26
7.7.1 Small prismatic cells	26
7.7.2 L, M, H or X cylindrical and button cells.....	27
7.7.3 LT/LU, MT/MU or HT/HU cylindrical cells.....	27
7.7.4 J cylindrical cells.....	27
7.7.5 JT cylindrical cells.....	28
7.7.6 R cylindrical cells	28
7.8 Gas release device operation.....	28
7.9 Storage	29
7.10 Charge acceptance at +55 °C for LT, MT or HT cylindrical cells.....	29
7.11 Trickle charge acceptance for JT cylindrical cells	30
7.12 Internal resistance	30
7.12.1 General	30

7.12.2	Measurement of the internal a.c. resistance	31
7.12.3	Measurement of the internal d.c. resistance	31
8	Mechanical tests	32
9	Safety requirements	32
10	Type approval and batch acceptance	32
10.1	General	32
10.2	Type approval	32
10.2.1	Type approval for small prismatic cells	32
10.2.2	Type approval for cylindrical and button cells	32
10.3	Batch acceptance	34
Annex A (informative)	Procedure for measuring the capacity of a battery	36
Bibliography	37
Figure 1	– Jacketed cylindrical cells	12
Figure 2	– Jacketed small prismatic cells	12
Figure 3	– Jacketed cells dimensionally interchangeable with primary cells	13
Figure 4	– Button cells	15
Table 1	– Dimensions of jacketed small prismatic cells	12
Table 2	– Dimensions of jacketed cylindrical cells dimensionally interchangeable with primary cells	13
Table 3	– Dimensions of jacketed cylindrical cells not dimensionally interchangeable with primary cells	14
Table 4	– Dimensions of button cells	15
Table 5	– Discharge performance at 20 °C for small prismatic cells and cylindrical cells	16
Table 6	– Discharge performance at 20 °C for button cells	17
Table 7	– Discharge performance at –18 °C for small prismatic cells	17
Table 8	– Discharge performance at –18 °C for cylindrical cells	17
Table 9	– Discharge performance at –18 °C for button cells	18
Table 10	– Endurance in cycles for small prismatic cells and cylindrical cells not dimensionally interchangeable with primary cells	19
Table 11	– Endurance in cycles for H or X cells	20
Table 12	– Endurance in cycles for cylindrical X cells	20
Table 13	– Endurance in cycles for HR or XR cells	21
Table 14	– Endurance in cycles for button cells	21
Table 15	– Permanent charge endurance for L, M, J, H or X cylindrical cells	22
Table 16	– Permanent charge endurance for button cells	22
Table 17	– Permanent charge endurance for LT, MT, or HT cylindrical cells	24
Table 18	– Permanent charge endurance for LU, MU, or HU cylindrical cells	26
Table 19	– Overcharge at 0 °C	27
Table 20	– Charge and discharge at +55 °C	30
Table 21	– Trickle charge acceptance for JT cylindrical cells	30
Table 22	– Constant discharge currents used for measurement of d.c. resistance	31
Table 23	– Sequence of tests for type approval for small prismatic cells	32
Table 24	– Sequence of tests for type approval for cylindrical cells	33

Table 25 – Sequence of tests for type approval for button cells 34
Table 26 – Recommended test sequence for batch acceptance 35

Withheld

iTech Standards
(<https://standards.iteh.ai>)
Document Preview

[IEC 61951-1:2013](https://standards.iteh.ai/standards/iec/61951-1:2013)

<https://standards.iteh.ai/standards/iec/61951-1:2013>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**SECONDARY CELLS AND BATTERIES CONTAINING
ALKALINE OR OTHER NON-ACID ELECTROLYTES –
PORTABLE SEALED RECHARGEABLE SINGLE CELLS –****Part 1: Nickel-cadmium**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61951-1 has been prepared by subcommittee 21A: Secondary cells and batteries containing alkaline or other non-acid electrolytes, of IEC technical committee 21: Secondary cells and batteries.

This third edition cancels and replaces the second edition (2003) and its amendment 1 (2005) of which it constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- addition of several new cell sizes;
- introduction of a new cell type J;
- creation of Annex A: Capacity of batteries measurement.

The text of this standard is based on the following documents:

FDIS	Report on voting
21A/521/FDIS	21A/525/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61951 series can be found, under the general title *Secondary cells and batteries containing alkaline or other non-acid electrolytes – Portable sealed rechargeable single cells*, on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

iTech Standards
(<https://standards.itih.ai>)
Document Preview

[IEC 61951-1:2013](https://standards.itih.ai/standards/iec/61951-1-2013)

<https://standards.itih.ai/standards/iec/61951-1-2013>

WITHDRAWN

SECONDARY CELLS AND BATTERIES CONTAINING ALKALINE OR OTHER NON-ACID ELECTROLYTES – PORTABLE SEALED RECHARGEABLE SINGLE CELLS –

Part 1: Nickel-cadmium

1 Scope

This part of IEC 61951 specifies marking, designation, dimensions, tests and requirements for portable sealed nickel-cadmium small prismatic, cylindrical and button rechargeable single cells, suitable for use in any orientation.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-482, *International Electrotechnical Vocabulary – Chapter 482: Primary and secondary cells and batteries*

IEC 60086-1, *Primary batteries – Part 1: General*

IEC 60086-2, *Primary batteries – Part 2: Physical and electrical specifications*

IEC 60410, *Sampling plans and procedures for inspection by attributes*

IEC 61959, *Secondary cells and batteries containing alkaline or other non-acid electrolytes – Mechanical tests for sealed portable secondary cells and batteries*

IEC 62133, *Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells and for batteries made from them, for use in portable applications*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in the IEC 60050-482 and the following apply.

3.1

nominal voltage

suitable approximate value of voltage used to designate or identify the voltage of a cell or a battery

Note 1 to entry: The nominal voltage of a sealed nickel-cadmium rechargeable single cell: 1,2 V

Note 2 to entry: The nominal voltage of a battery of n series connected cells is equal to n times the nominal voltage of a single cell.

[SOURCE: IEC 60050-482:2004, 482-03-31, modified – Addition of Notes 1 and 2 to entry.]

3.2 rated capacity

capacity value of a cell or battery determined under specified conditions and declared by the manufacturer

Note 1 to entry: The rated capacity is the quantity of electricity C_5 Ah (ampere-hours) declared by the manufacturer which a single cell can deliver during a 5 h period when charging, storing and discharging under the conditions specified in 7.3.2.

Note 2 to entry: The capacity of battery is the quantity of electricity C_5 Ah (ampere-hours) declared by the manufacturer which a battery can deliver during a 5 h period, when charged, stored and discharged under the procedure described in Annex A.

[SOURCE: IEC 60050-482:2004, 482-03-15, modified – Addition of Notes 1 and 2 to entry.]

3.3 small prismatic cell

cell in the form of a rectangular parallelepiped whose width and thickness dimensions are not more than 25 mm

3.4 cylindrical cell

cell of circular cross-section in which the overall height is equal to, or greater than, the overall diameter

3.5 button cell

cell of a circular cross-section in which the overall height is less than the overall diameter

3.6 nickel-cadmium cell

secondary cell containing a nickel hydroxide compound for the positive electrode, cadmium compound for the negative electrode, and potassium hydroxide or other alkaline solution as electrolyte. Positive electrodes are isolated from negative electrodes by a separator

3.7 sealed cell

cell which remains closed and does not release either gas or liquid when operated within the limits specified by the manufacturer

Note 1 to entry: The cell is equipped with a safety device to prevent dangerously high internal pressure.

Note 2 to entry: The cell does not require addition to the electrolyte and is designed to operate during its life in its original sealed state.

[SOURCE: IEC 60050-482:2004, 482-05-17, modified – The existing note has been developed into Notes 1 and 2 to entry.]

4 Parameter measurement tolerances

The overall accuracy of controlled or measured values, relative to the specified or actual values, shall be within the following tolerances:

- a) ± 1 % for voltage;
- b) ± 1 % for current;
- c) ± 1 % for capacity;
- d) ± 2 °C for temperature;
- e) $\pm 0,1$ % for time;

- f) $\pm 0,1$ mm for dimensions;
- g) ± 5 % for humidity.

These tolerances comprise the combined accuracy of the measuring instruments, the measurement techniques used and all other sources of error in the test procedure.

The details of the instrumentation used shall be provided in each report of results.

5 Cell designation and marking

5.1 Cell designation

5.1.1 Small prismatic cells and cylindrical cells

5.1.1.1 General

Sealed nickel-cadmium small prismatic rechargeable single cells and cylindrical rechargeable single cells shall be designated by a letter L, M, J, H or X which signifies:

- low rate of discharge (L);
- medium rate of discharge (M);
- high medium rate of discharge (J);
- high rate of discharge (H);
- very high rate of discharge (X).

NOTE 1 These cells are typically but not exclusively used for the following discharge rates:

- L up to $0,5 I_t$ A;
- M up to $3,5 I_t$ A;
- J up to $5,0 I_t$ A;
- H up to $7,0 I_t$ A;
- X up to and above $15 I_t$ A.

NOTE 2 These currents are expressed as multiples of I_t A, where I_t A = C_5 Ah/1 h (see IEC 61434).

When a cell is intended for permanent charge at elevated temperatures, typically higher than 40 °C, a letter "T" is placed after the letter L, M, J, H or X.

When a cell is intended for permanent charge at elevated temperatures, typically higher than 50 °C, a letter "U" is placed after the letter L, M, J, H or X.

When a cell is intended for rapid charge, typically at $1,0 I_t$ A, a letter "R" is placed after the letter L, M, J, H or X.

5.1.1.2 Small prismatic cells

Sealed nickel-cadmium small prismatic rechargeable single cells shall be designated by the letters "KF" followed by a letter L, M, J, H or X followed by three groups of figures, each one separated by a solidus:

- a) the two figures to the left of the first solidus shall indicate the maximum width specified for the cell, expressed in millimetres, rounded up to the next whole number;
- b) the two figures in the middle shall indicate the maximum thickness specified for the cell, expressed in millimetres, rounded up to the next whole number;
- c) the two figures to the right of the second solidus shall indicate the maximum height specified for the cell, expressed in millimetres, rounded up to the next whole number.

EXAMPLE KFL 18/07/49 designation identifies a small prismatic cell of low discharge rate capability, with a maximum width of 18 mm, a maximum thickness of 7 mm and a maximum height of 49 mm.

5.1.1.3 Cylindrical cells

Sealed nickel-cadmium cylindrical rechargeable single cells shall be designated by the letters “KR” followed by a letter L, M, J, H or X followed by two groups of figures, each one separated by a solidus:

- a) the two figures to the left of the solidus shall indicate the maximum diameter specified for the cell, expressed in millimetres, rounded up to the next whole number;
- b) the two figures to the right of the solidus shall indicate the maximum height specified for the cell, expressed in millimetres, rounded up to the next whole number.

When a manufacturer designs a cell with dimensions and tolerances which make it interchangeable with a primary cell, the designation of Table 2 shall also be marked on the cell.

EXAMPLE 1 KRL 33/62 designation identifies a cylindrical cell of low discharge rate capability, with a maximum diameter of 33 mm and a maximum height of 61,5 mm.

EXAMPLE 2 KRLT 33/62 designation identifies a cylindrical cell of low discharge rate capability, intended for permanent charge at elevated temperatures, with a maximum diameter of 33 mm and a maximum height of 61,5 mm.

EXAMPLE 3 KRHR 23/43 designation identifies a cylindrical cell of high discharge rate capability, intended for rapid charge, with a maximum diameter of 23 mm and a maximum height of 43 mm.

For cells dimensionally interchangeable with primary cells, the following single or double figures following the letter L, M or R may indicate:

- 20- size D
- 14- size C
- 6- size AA
- 03- size AAA

EXAMPLE 4 KRMR03 designation identifies a sealed nickel-cadmium cylindrical rechargeable single cell, of medium discharge rate capability, also intended for rapid charge, dimensionally interchangeable with primary cell and whose type designation is AAA.

5.1.2 Button cells

Sealed nickel-cadmium button rechargeable single cells shall be designated by the letters “KB” followed by a letter L, M or H which signifies:

- low rate of discharge (L);
- medium rate of discharge (M);
- high rate of discharge (H).

The group of three letters shall then be followed by two groups of figures separated by a solidus:

- a) the three figures to the left of the solidus shall indicate the maximum diameter specified for the cell, expressed in tenths of millimetres, rounded up to the next whole number;
- b) the three figures to the right of the solidus shall indicate the maximum height specified for the cell, expressed in tenths of millimetres, rounded up to the next whole number.

EXAMPLE KBL 116/055 designation identifies a button cell of low discharge rate capability, with a maximum diameter of 11,6 mm and a maximum height of 5,5 mm.

5.2 Cell termination

This standard does not specify cell termination.

5.3 Marking

5.3.1 Small prismatic cells and cylindrical cells

Each jacketed cell supplied without connections shall carry durable markings giving the following minimum information:

- sealed, rechargeable nickel-cadmium or Ni-Cd;
- cell designation as specified in 5.1 (in addition, it is permissible for a manufacturer to use his own type designation);
- rated capacity;
- nominal voltage;
- recommended charge rate and time or permanent charge current for "T" cells;
- polarity;
- date of manufacture (which may be in code);
- name or identification of manufacturer or supplier;
- mark for promoting useful use of cell resources.

NOTE 1 This mark is applied where a recycling programme is available.

NOTE 2 In general, sealed nickel-cadmium rechargeable single cells with connection tabs need no labels if they form an integral part of a battery, in which case, the battery itself is marked with the above information.

5.3.2 Button cells

Each button cell supplied without connection shall carry durable markings giving the following minimum information:

- cell designation as specified in 5.1;
- polarity;
- date of manufacture (which may be in code);
- name or identification of manufacturer or supplier.

6 Dimensions

6.1 Small prismatic cells and cylindrical cells

6.1.1 General

Dimensions of cells, shown in Figure 1 and Figure 2, are given in Tables 1, 2 and 3.

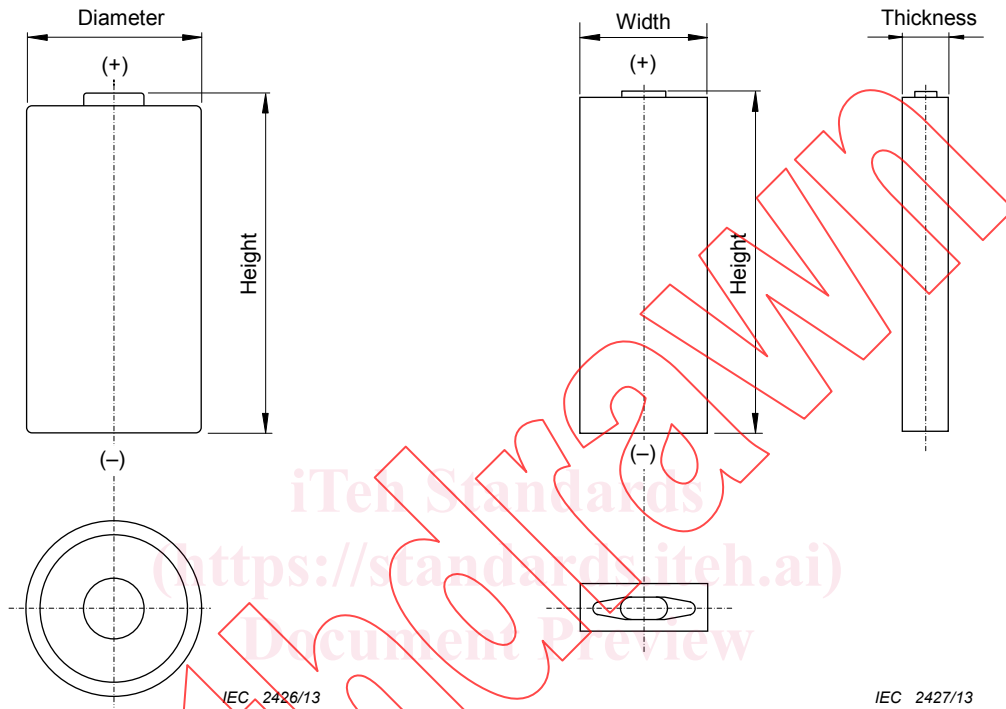


Figure 1 – Jacketed cylindrical cells

Figure 2 – Jacketed small prismatic cells

6.1.2 Small prismatic cells

Table 1 shows the dimensions for jacketed small prismatic cells.

Table 1 – Dimensions of jacketed small prismatic cells

Cell designation	Width mm	Thickness mm	Overall height mm
KF 18/07/41	17,3	6,1	40,2
KF 18/07/49	17,3	6,1	48,2
KF 18/09/49	17,3	8,3	48,2
KF 18/07/68	17,3	6,1	67,3
KF 18/09/68	17,3	8,3	67,3
KF 18/11/68	17,3	10,5	67,3
KF 18/18/68	17,3	17,3	67,3
KF 23/15/68	23,0	14,7	67,3

Tolerances for Width: 0, -1,0
 Tolerances for Thickness: 0, -0,7, -1,0
 Tolerances for Overall height: 0, -1,0, -1,5