

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Dynamic modules –
Part 3-3: Performance specification templates – Wavelength selective switches**

**Modules dynamiques –
Partie 3-3: Modèles de spécification de performance – Commutateurs sélectifs
en longueur d'onde**

IEC 62343-3-3:2014

<https://standards.iteh.ai/standards/iec/3595b4ce-54f4-4e73-865c-a4b81d1a4961/iec-62343-3-3-2014>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2014 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in 14 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

More than 55 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Catalogue IEC - webstore.iec.ch/catalogue

Application autonome pour consulter tous les renseignements bibliographiques sur les Normes internationales, Spécifications techniques, Rapports techniques et autres documents de l'IEC. Disponible pour PC, Mac OS, tablettes Android et iPad.

Recherche de publications IEC - www.iec.ch/searchpub

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans 14 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

Plus de 55 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Dynamic modules –
Part 3-3: Performance specification templates – Wavelength selective switches**

**Modules dynamiques –
Partie 3-3: Modèles de spécification de performance – Commutateurs sélectifs
en longueur d'onde**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX

R

ICS 33.180.20

ISBN 978-2-8322-1544-9

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS


FOREWORD.....	3
INTRODUCTION.....	5
1 Scope.....	6
2 Normative references	6
3 Terms and definitions	7
4 Test report.....	14
5 Reference components.....	14
6 Performance requirements	14
6.1 Dimensions.....	14
6.2 Sample size	14
6.3 Test details and requirements	14
Bibliography.....	19
Figure 1 – Illustration of X -dB bandwidth.....	9
Figure 2 – Illustration of adjacent channel crosstalk.....	10
Figure 3 – Illustration of non-adjacent channel crosstalk.....	11
Figure 4 – Illustration of latency time, rise time, fall time, bounce time, and switching time	13
Table 1 – Tests and requirements.....	15

(<https://standards.iteh.ai>)

Document Preview

IEC 62343-3-3:2014

<https://standards.iteh.ai/catalog/standards/iec/359584ce-54f4-4e73-865c-a4b81d1a4961/iec-62343-3-3-2014>

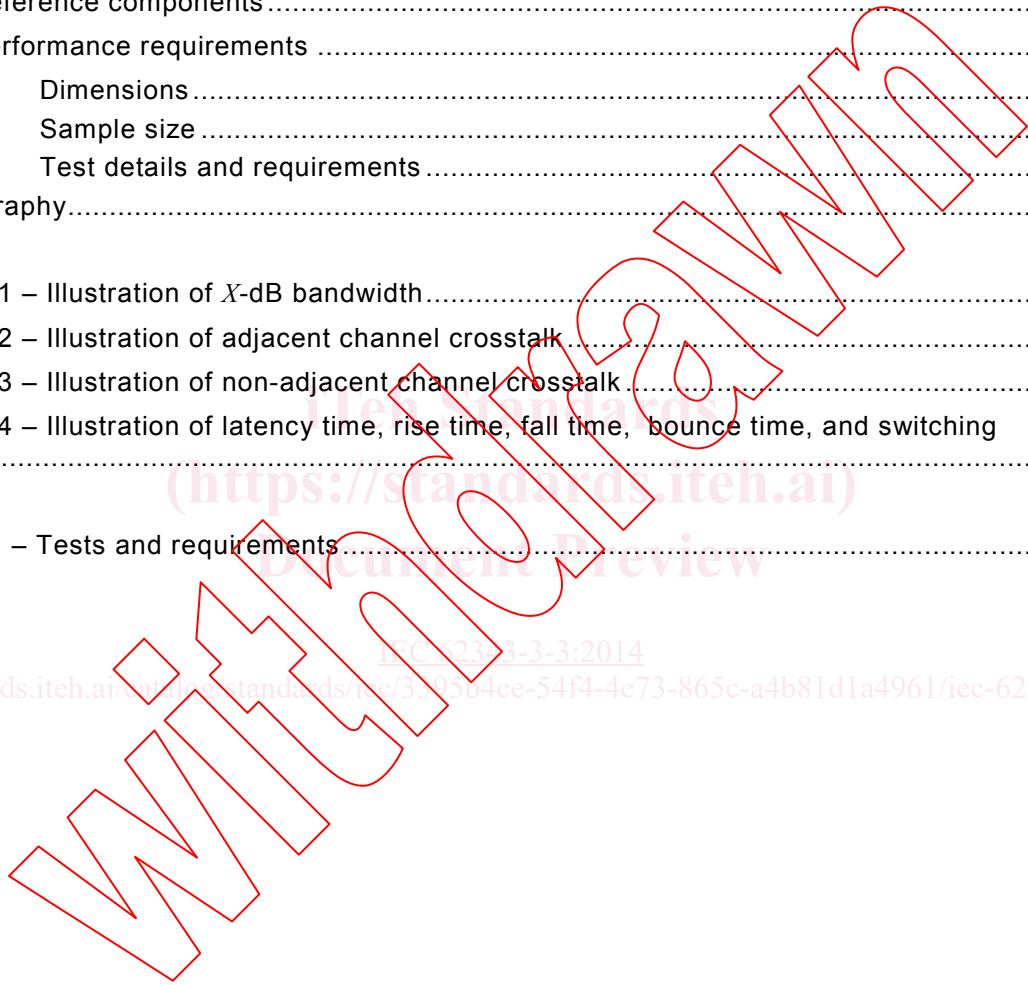

INTERNATIONAL ELECTROTECHNICAL COMMISSION

DYNAMIC MODULES –

Part 3-3: Performance specification templates –
Wavelength selective switches

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62343-3-3 has been prepared by subcommittee 86C: Fibre optic systems and active devices, of IEC technical committee 86: Fibre optics.

The text of this standard is based on the following documents:

CDV	Report on voting
86C/1156/CDV	86C/1214/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62343 series, published under the general title *Dynamic modules*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

Withdawn

iTech Standards
(<https://standards.itih.ai>)
Document Preview

[IEC 62343-3-3:2014](https://standards.itih.ai/standards/iec/359584ce-54f4-4e73-865c-a4b81d1a4961/iec-62343-3-3-2014)

<https://standards.itih.ai/standards/iec/359584ce-54f4-4e73-865c-a4b81d1a4961/iec-62343-3-3-2014>

INTRODUCTION

A wavelength selective switch (WSS) is a dynamic module (DM), which is mainly used in a reconfigurable optical add-drop multiplexer (ROADM) system to switch a particular wavelength signal to any output ports in DWDM networks. The WSS module has one input port and a plurality of output ports (i.e. $1 \times N$ WSS) and can be used in reverse, with N input ports and one output port, depending on its application. It is controlled with software, which determines any wavelength signal among a DWDM signal from one input port to switch to a particular output port in case of $1 \times N$ application.

Withhold

iTech Standards
(<https://standards.iteh.ai>)
Document Preview

IEC 62343-3-3:2014
<https://standards.iteh.ai/catalog/standards/iec/359584ce-54f4-4e73-865c-a4b81d1a4961/iec-62343-3-3-2014>

DYNAMIC MODULES –

Part 3-3: Performance specification templates – Wavelength selective switches

1 Scope

This part of IEC 62343 provides a performance specification template for wavelength selective switches. The object is to provide a framework for the preparation of detail specifications on the performance of wavelength selective switches.

Additional specification parameters may be included for detailed product specifications or performance specifications. However, specification parameters specified in this standard shall not be removed from the detail product specifications or performance specifications.

The technical information regarding wavelength selective switches, and their applications in DWDM systems will be described in IEC TR 62343-6-4, currently under consideration.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61290-7-1, *Optical amplifiers – Test methods – Part 7-1: Out-of-band insertion losses – Filtered optical power meter method*

IEC 61300-2-14, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-14: Tests – High optical power*

IEC 61300-3-2, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-2: Examination and measurements – Polarization dependent loss in a single-mode fibre optic device*

IEC 61300-3-6, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-6: Examinations and measurements – Return loss*

IEC 61300-3-14, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-14: Examinations and measurements – Accuracy and repeatability of the attenuation settings of a variable attenuator*

IEC 61300-3-21, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-21: Examinations and measurements – Switching time and bounce time*

IEC 61300-3-29, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-29: Examinations and measurements – Measurement techniques for characterizing the amplitude of the spectral transfer function of DWDM components*

IEC 61300-3-32, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-32: Examinations and measurements – Polarization mode dispersion measurement for passive optical components*

IEC 61300-3-38, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-38: Examinations and measurements – Group delay, chromatic dispersion and phase ripple*

IEC 61753-021-2, *Fibre optic passive component performance standard – Part 021-2: Grade C/3 single-mode fibre optic connectors for category C – Controlled environment*

IEC 62074-1, *Fibre optic interconnecting devices and passive components – Fibre optic WDM devices – Part 1: Generic specification*

IEC 62343-4-1, *Dynamic modules – Part 4-1: Software and hardware interface standards – 1x9 wavelength selective switch*¹

ITU-T Recommendation G.694.1, *Spectral grids for WDM applications: DWDM frequency grid*

ITU-T G.Sup39, *Optical system design and engineering considerations*

3 Terms and definitions

For the purpose of this document, the following terms and definitions apply.

3.1

wavelength selective switch

WSS

dynamic module, which is mainly used in a reconfigurable optical add drop multiplexer (ROADM) system to switch all wavelength signals to their respective required output port in DWDM networks

Note 1 to entry: It is electrically controlled with software, which directs each wavelength signal among an input DWDM signal from one input port to the required output port for each wavelength signal.

3.2

operating wavelength range

specified range of wavelengths from λ_{imin} to λ_{imax} about a nominal operating wavelength λ_1 , within which a dynamic optical module is designed to operate with a specified performance and generally corresponds to spectral bands for single-mode systems defined in ITU-T G.Sup39

3.3

port

optical fibre or optical fibre connector attached to a WSS module for the entry and/or exit of the optical signal (input and/or output)

3.4

channel

signal at wavelength, λ , that corresponds to ITU grid (ITU-T Recommendation G.694.1) within the range of operating wavelength range

¹ Under consideration.

3.5 channel spacing

centre-to-centre difference in frequency (or wavelength) between adjacent channels in a device

3.6 channel frequency range

frequency range within which a device is expected to operate with a specified performance

Note 1 to entry: For a particular nominal channel central frequency, f_{nomi} , this frequency range is from $f_{\text{imin}} = (f_{\text{nomi}} - \Delta f_{\text{max}})$ to $f_{\text{imax}} = (f_{\text{nomi}} + \Delta f_{\text{max}})$, where Δf_{max} is the maximum channel central frequency deviation.

Note 2 to entry: Nominal channel centre frequency and maximum channel centre frequency deviation are defined in ITU-T Rec. G.692.

3.7 insertion loss

IL

value defined in the equation below at the particular wavelength between two conducting ports

Note 1 to entry: It is the reduction in optical power between an input and output port of a module expressed in decibels.

$$IL = -10 \log (P_{\text{out}}/P_{\text{in}})$$

where

P_{in} is the optical power launched into input port;

P_{out} is the optical power received from the output port.

3.8 insertion loss uniformity

difference between the maximum and minimum insertion loss at the output for a specified set of input ports

3.9 insertion loss ripple

maximum peak-to-peak variation of the insertion loss within a channel frequency (or wavelength) range

3.10 X-dB passband width

width of a channel centred about the channel central wavelength within which the optical attenuation is within X dB

Note 1 to entry: The terms “operating wavelength range” or “channel passband” are used and have the same meaning as passband for DWDM devices. The X-dB bandwidth is defined through the spectral dependence of a_{ij} (where $i \neq j$) as the minimum wavelength range centred about the operating wavelength λ_p within which the variation of a_{ij} is less than X dB. The minimum wavelength range is determined considering thermal wavelength shift, polarization dependence and long-term aging shift (refer to Figure 1 below).

Note 2 to entry: It is recommended that the passband width be specified as 0,5 dB, 1 dB and 3 dB ($X = 0,5, 1$ and 3).

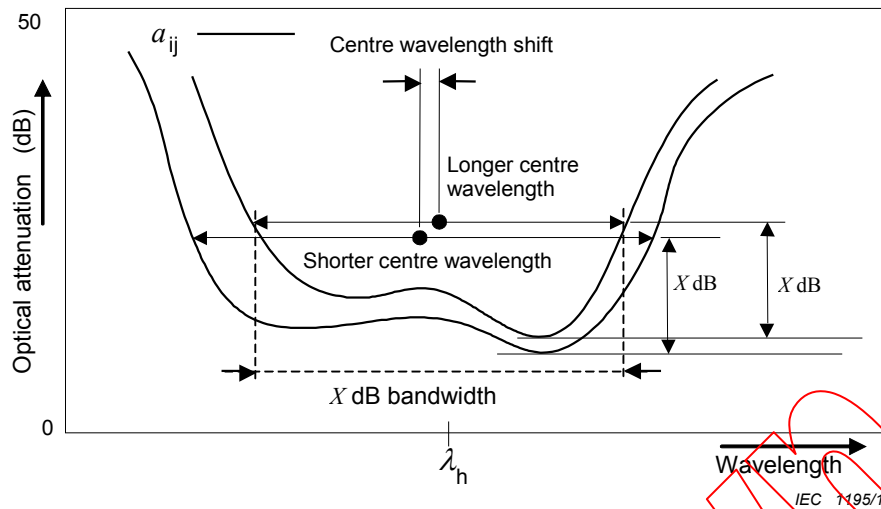


Figure 1 – Illustration of X-dB bandwidth

3.11

return loss

RL

fraction of input power that is returned from any port of a module expressed in decibels and defined in this equation at the particular wavelength between two conducting ports

$$RL = -10 \log (P_{\text{refl}}/P_{\text{in}})$$

where

P_{in} is the optical power launched into port,

P_{refl} is the optical power received back from the same port.

3.12

adjacent channel crosstalk


adjacent channel isolation

crosstalk with the restriction that x , the isolation wavelength number, is restricted to the channels immediately adjacent to the (channel) wavelength number associated with output port

Note 1 to entry: Adjacent channel crosstalk is a negative value in dB (see Figure 2, below).

Note 2 to entry: The adjacent channel isolation is different from adjacent channel crosstalk. In Figure 2, an up-pointing arrow shows positive, a down-pointing arrow negative. Generally, there are two adjacent channel isolations for the shorter wavelength (higher frequency) side and a longer wavelength (lower frequency) side.

Note 3 to entry: The term crosstalk and isolation are often used with almost the same in meaning. Care should be taken not to confuse crosstalk and isolation. Crosstalk is defined so that for WDM devices, the value of the ratio between the optical power of the specified signal and the specified noise, is a negative value in dB. The crosstalk is defined for each output port. Crosstalk for WDM devices is defined for a DEMUX ($1 \times N$ WDM device). The crosstalk for port o to port j is the subtraction from the insertion loss of port i to o (conducting port pair) to the isolation of port j to o (isolated port pair). For WDM devices having three or more ports, the crosstalk should be specified as the maximum value of the crosstalk for each output port. On the other hand, isolation is the minimum value of a_{ij} (where $i \neq j$) within isolation wavelength range for isolated port pair. Isolation is positive value in dB.

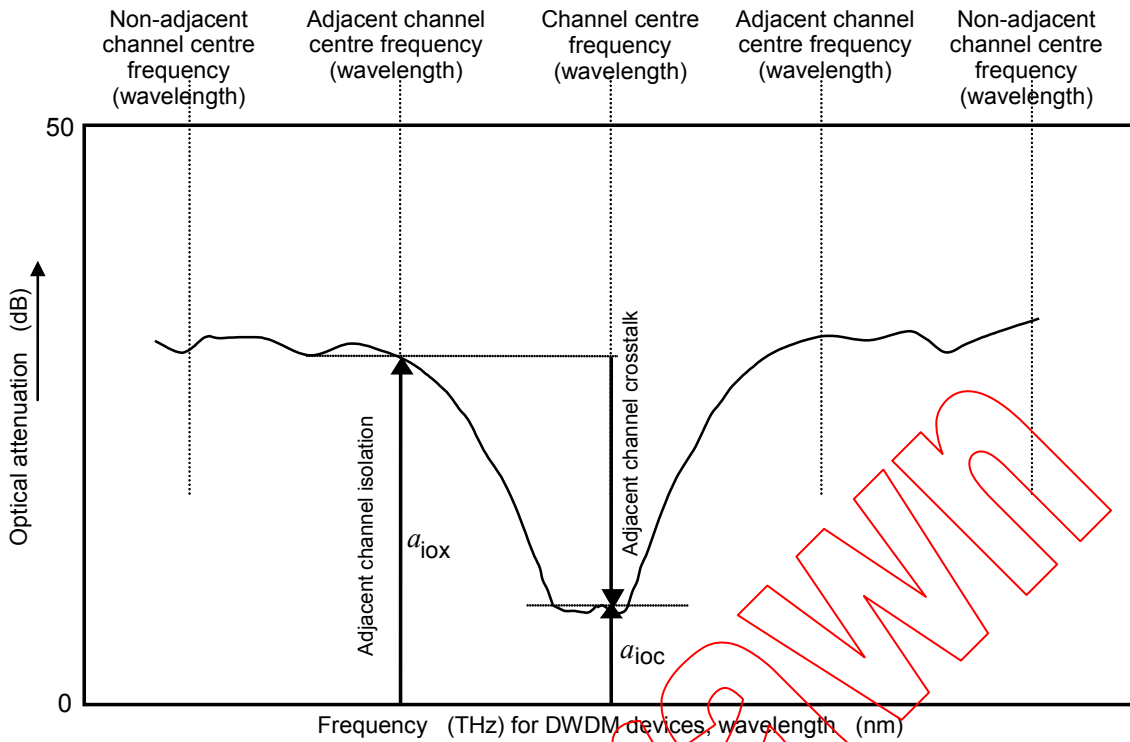

IEC 1196/14

Figure 2 – Illustration of adjacent channel crosstalk

3.13

non-adjacent channel crosstalk

non-adjacent channel isolation

crosstalk with the restriction that the isolation wavelength (frequency) is restricted to each of the channels not immediately adjacent to the channel associated with output port

Note 1 to entry: The non-adjacent channel crosstalk is different from non-adjacent channel isolation. In Figure 3, up-pointing arrow shows positive, down-pointing arrow negative.