



SLOVENSKI STANDARD

SIST EN 301 459 V1.3.1:2006

01-februar-2006

GUH']hg_ Y'nYa Y 'g_ Y'dcghUY']b'g]ghYa]'fG9 GL'É' < Ufa cb]n]fUb]'9B'nU'gUH']hg_ Y]b]hfU_]hj bY'hYfa]bUY'fG+K']b'gUH']hg_ Yi dcfUWb]ý_ Y'hYfa]bUY'fGI Hkž_]'cXXUUt dfch'gUH']lca 'j [YcghUM]cbUfb]'cfV]h'j 'ZY_j Yb b] 'dUgcj] 'cX' &- ž ; < n'Xc' '\$ž ; < nž_]'nUYa UV]ghj YbY'nU h'j Y 'YbU' "&X]fY_]hj YF/ HH9

Satellite Earth Stations and Systems (SES); Harmonized EN for Satellite Interactive Terminals (SIT) and Satellite User Terminals (SUT) transmitting towards satellites in geostationary orbit in the 29,5 GHz to 30,0 GHz frequency bands covering essential requirements under article 3.2 of the R&TTE Directive

[SIST EN 301 459 V1.3.1:2006](https://standards.iteh.ai/catalog/standards/sist/9c1da08e-685f-47a4-bccb-648c8c82bf47/sist-en-301-459-v1-3-1-2006)

<https://standards.iteh.ai/catalog/standards/sist/9c1da08e-685f-47a4-bccb-648c8c82bf47/sist-en-301-459-v1-3-1-2006>

Ta slovenski standard je istoveten z: EN 301 459 Version 1.3.1

ICS:

| | | |
|-----------|--|--|
| 33.060.30 | Radiorelejni in fiksni satelitski komunikacijski sistemi | Radio relay and fixed satellite communications systems |
|-----------|--|--|

SIST EN 301 459 V1.3.1:2006

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 301 459 V1.3.1:2006

<https://standards.iteh.ai/catalog/standards/sist/9c1da08e-685f-47a4-bccb-648c8c82bf47/sist-en-301-459-v1-3-1-2006>

ETSI EN 301 459 V1.3.1 (2005-09)

Candidate Harmonized European Standard (Telecommunications series)

**Satellite Earth Stations and Systems (SES);
Harmonized EN for Satellite Interactive Terminals (SIT)
and Satellite User Terminals (SUT)
transmitting towards satellites in geostationary orbit
in the 29,5 GHz to 30,0 GHz frequency bands
covering essential requirements
under article 3.2 of the R&TTE Directive**

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

[SIST EN 301 459 V1.3.1:2006](https://standards.iteh.ai/catalog/standards/sist/9c1da08e-685f-47a4-bccb-648c8c82bf47/sist-en-301-459-v1-3-1-2006)

<https://standards.iteh.ai/catalog/standards/sist/9c1da08e-685f-47a4-bccb-648c8c82bf47/sist-en-301-459-v1-3-1-2006>



Reference

REN/SES-00108

Keywords

FSS, earth station, satellite, terminal, regulation

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 301 459 V1.3.1:2006

<https://standards.iteh.ai/catalog/standards/sist/9c1da08e-685f-47a4-bccb-648c8c821747-2005-09-301-459-v1-3-1-2006>

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2005.
All rights reserved.

DECT™, PLUGTESTS™ and UMTS™ are Trade Marks of ETSI registered for the benefit of its Members.
TIPHON™ and the TIPHON logo are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

| | |
|---|----|
| Intellectual Property Rights | 6 |
| Foreword..... | 6 |
| Introduction | 7 |
| 1 Scope | 9 |
| 2 References | 10 |
| 3 Definitions and abbreviations..... | 10 |
| 3.1 Definitions | 10 |
| 3.2 Abbreviations | 12 |
| 4 Technical requirements specifications | 13 |
| 4.1 Environmental profile..... | 13 |
| 4.2 Conformance requirements | 13 |
| 4.2.1 General..... | 13 |
| 4.2.2 Off-axis spurious radiation | 13 |
| 4.2.2.1 Purpose..... | 13 |
| 4.2.2.2 Specification..... | 13 |
| 4.2.2.3 Conformance tests..... | 14 |
| 4.2.3 On-axis spurious radiation | 14 |
| 4.2.3.1 Purpose..... | 14 |
| 4.2.3.2 Specification..... | 14 |
| 4.2.3.2.1 "Carrier-on" state..... | 14 |
| 4.2.3.2.2 "Carrier-off" and "Transmission disabled" states..... | 15 |
| 4.2.3.3 Conformance tests | 15 |
| 4.2.4 Off-axis EIRP emission density within the band | 15 |
| 4.2.4.1 Purpose..... | 15 |
| 4.2.4.2 Specification..... | 15 |
| 4.2.4.3 Conformance tests | 17 |
| 4.2.5 Carrier suppression | 17 |
| 4.2.5.1 Purpose..... | 17 |
| 4.2.5.2 Specification..... | 17 |
| 4.2.5.3 Conformance tests..... | 17 |
| 4.2.6 Antenna pointing accuracy | 17 |
| 4.2.6.1 Purpose..... | 17 |
| 4.2.6.2 Specification..... | 17 |
| 4.2.6.3 Conformance tests..... | 18 |
| 4.2.7 Control and Monitoring Functions (CMF)..... | 18 |
| 4.2.7.1 General | 18 |
| 4.2.7.2 Processor monitoring | 19 |
| 4.2.7.2.1 Purpose | 19 |
| 4.2.7.2.2 Specification | 19 |
| 4.2.7.2.3 Conformance tests | 19 |
| 4.2.7.3 Transmit subsystem monitoring | 20 |
| 4.2.7.3.1 Purpose | 20 |
| 4.2.7.3.2 Specification | 20 |
| 4.2.7.3.3 Conformance tests | 20 |
| 4.2.7.4 Power-on/Reset | 20 |
| 4.2.7.4.1 Purpose | 20 |
| 4.2.7.4.2 Specification | 20 |
| 4.2.7.4.3 Conformance tests | 20 |
| 4.2.7.5 Control Channel (CC) reception | 20 |
| 4.2.7.5.1 Purpose | 20 |
| 4.2.7.5.2 Specification | 20 |
| 4.2.7.5.3 Conformance tests | 21 |
| 4.2.7.6 Network control commands | 21 |

| | | |
|-----------------------------|---|-----------|
| 4.2.7.6.1 | Purpose | 21 |
| 4.2.7.6.2 | Specification | 21 |
| 4.2.7.6.3 | Conformance test | 21 |
| 4.2.7.7 | Initial burst transmission | 21 |
| 4.2.7.7.1 | Purpose | 21 |
| 4.2.7.7.2 | Specification | 21 |
| 4.2.7.7.3 | Conformance tests | 21 |
| 5 | Testing for compliance with technical requirements | 22 |
| 5.1 | Environmental conditions for testing | 22 |
| 5.2 | Essential radio test suites | 22 |
| 6 | Test method | 22 |
| 6.1 | General | 22 |
| 6.2 | Off-axis spurious radiation | 23 |
| 6.2.1 | Test method | 23 |
| 6.2.1.1 | Up to 1 000 MHz | 23 |
| 6.2.1.1.1 | Test site | 23 |
| 6.2.1.1.2 | Measuring receivers | 24 |
| 6.2.1.1.3 | Procedure | 24 |
| 6.2.1.2 | Above 1 000 MHz | 24 |
| 6.2.1.2.1 | Identification of the significant frequencies of spurious radiation | 24 |
| 6.2.1.2.2 | Measurement of radiated power levels of identified spurious radiation | 25 |
| 6.2.1.2.3 | Measurement of conducted spurious radiation at the antenna flange | 26 |
| 6.3 | On-axis spurious radiation | 27 |
| 6.3.1 | Test method | 27 |
| 6.3.1.1 | Test site | 27 |
| 6.3.1.2 | Method of measurement | 27 |
| 6.3.1.2.1 | General | 27 |
| 6.3.1.2.2 | Method of measurement at the antenna flange | 27 |
| 6.3.1.2.3 | Method of measurement for an EUT with antenna | 28 |
| 6.4 | Off-axis EIRP emission density within the band | 29 |
| 6.4.1 | Test method | 29 |
| 6.4.1.1 | Transmit output power density | 29 |
| 6.4.1.1.1 | General | 29 |
| 6.4.1.1.2 | Test site | 29 |
| 6.4.1.1.3 | Method of measurement | 30 |
| 6.4.1.2 | Antenna transmit gain | 31 |
| 6.4.1.2.1 | General | 31 |
| 6.4.1.2.2 | Test site | 31 |
| 6.4.1.2.3 | Method of measurement | 31 |
| 6.4.1.3 | Antenna transmit radiation patterns | 32 |
| 6.4.1.3.1 | General | 32 |
| 6.4.1.3.2 | Test site | 32 |
| 6.4.1.3.3 | Test arrangement | 32 |
| 6.4.1.3.4 | Co-polar radiation pattern - azimuth | 32 |
| 6.4.1.3.5 | Co-polar radiation pattern - elevation | 33 |
| 6.4.1.3.6 | Cross-polar radiation pattern - azimuth | 34 |
| 6.4.1.3.7 | Cross-polar radiation pattern - elevation | 34 |
| 6.4.2 | Computation of results | 35 |
| 6.5 | Carrier suppression | 35 |
| 6.6 | Antenna pointing for STs | 35 |
| 6.7 | ST Control and Monitoring Functions (CMF) | 36 |
| 6.7.1 | Test arrangement | 36 |
| 6.7.2 | Processor monitoring - Test method | 37 |
| 6.7.3 | Transmit subsystem monitoring - Test method | 37 |
| 6.7.4 | Power-on/Reset - Test method | 38 |
| 6.7.5 | Control Channel (CC) reception - Test method | 38 |
| 6.7.6 | Network Control commands - Test method | 39 |
| 6.7.7 | Initial burst transmission - Test method | 40 |
| Annex A (normative): | The EN Requirements Table (EN-RT) | 42 |

| | | |
|-------------------------------|---|-----------|
| Annex B (informative): | Pointing stability methodology | 43 |
| Annex C (informative): | The EN title in the official languages | 44 |
| Annex D (informative): | Bibliography | 46 |
| History | | 47 |

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

[SIST EN 301 459 V1.3.1:2006](https://standards.iteh.ai/catalog/standards/sist/9c1da08e-685f-47a4-bccb-648c8c82b47/sist-en-301-459-v1-3-1-2006)

<https://standards.iteh.ai/catalog/standards/sist/9c1da08e-685f-47a4-bccb-648c8c82b47/sist-en-301-459-v1-3-1-2006>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Candidate Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Satellite Earth Stations and Systems (SES).

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC [1] (as amended) laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive") [2].

Technical specifications relevant to Directive 1999/5/EC [2] are given in annex A.

SIST EN 301 459 V1.3.1:2006

<https://standards.iteh.ai/catalog/standards/sist/9c1d109e-685f-47a4-bccb-648e8c82bf17/sist-en-301-459-v1-3-1-2006>
National transposition dates

| | |
|--|-------------------|
| Date of adoption of this EN: | 16 September 2005 |
| Date of latest announcement of this EN (doa): | 31 December 2005 |
| Date of latest publication of new National Standard or endorsement of this EN (dop/e): | 30 June 2006 |
| Date of withdrawal of any conflicting National Standard (dow): | 31 December 2008 |

Introduction

The present document is part of a set of standards designed to fit in a modular structure to cover all radio and telecommunications terminal equipment under the R&TTE Directive. Each standard is a module in the structure. The modular structure is shown in figure 1.

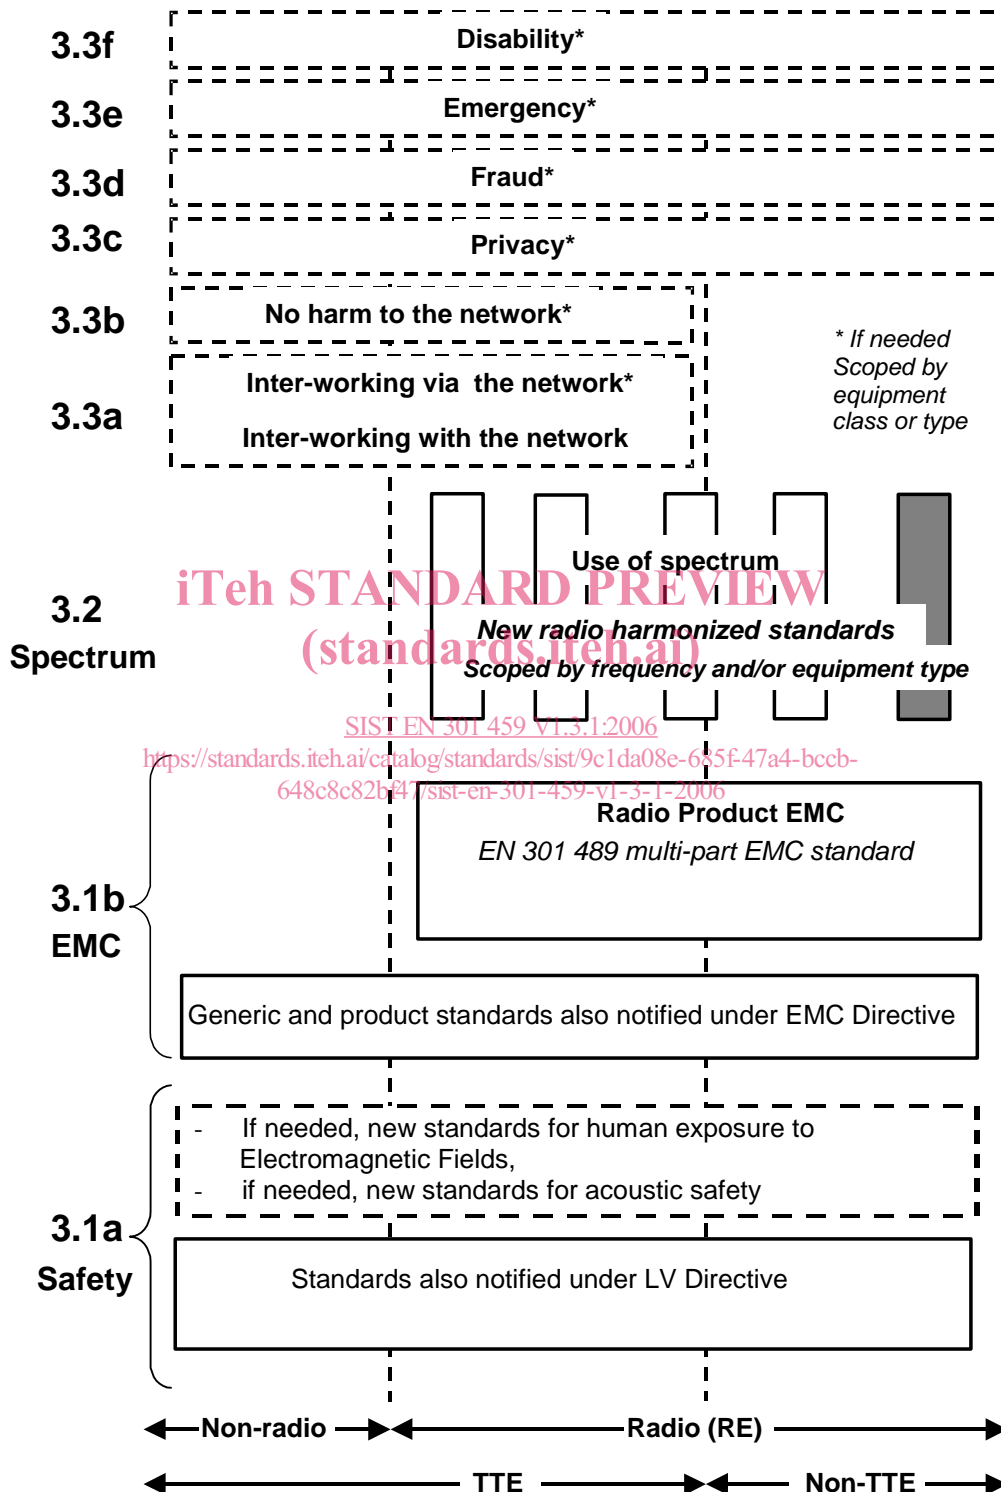


Figure 1: Modular structure for the various standards used under the R&TTE Directive

The left hand edge of the figure 1 shows the different clauses of article 3 of the R&TTE Directive.

For article 3.3 various horizontal boxes are shown. Dotted lines indicate that at the time of publication of the present document essential requirements in these areas have to be adopted by the Commission. If such essential requirements are adopted, and as far and as long as they are applicable, they will justify individual standards whose scope is likely to be specified by function or interface type.

The vertical boxes show the standards under article 3.2 for the use of the radio spectrum by radio equipment. The scopes of these standards are specified either by frequency (normally in the case where frequency bands are harmonized) or by radio equipment type.

For article 3.1b the diagram shows EN 301 489, the multi-part product EMC standard for radio used under the EMC Directive [5].

For article 3.1a the diagram shows the existing safety standards currently used under the LV Directive [6] and new standards covering human exposure to electromagnetic fields. New standards covering acoustic safety may also be required.

The bottom of the figure shows the relationship of the standards to radio equipment and telecommunications terminal equipment. A particular equipment may be radio equipment, telecommunications terminal equipment or both. A radio spectrum standard will apply if it is radio equipment. An article 3.3 standard will apply as well only if the relevant essential requirement under the R&TTE Directive is adopted by the Commission and if the equipment in question is covered by the scope of the corresponding standard. Thus, depending on the nature of the equipment, the essential requirements under the R&TTE Directive may be covered in a set of standards.

The modularity principle has been taken because:

- it minimizes the number of standards needed. Because equipment may, in fact, have multiple interfaces and functions it is not practicable to produce a single standard for each possible combination of functions that may occur in an equipment;
- it provides scope for standards to be added:
 - under article 3.2 when new frequency bands are agreed; or
 - under article 3.3 should the Commission take the necessary decisions without requiring alteration of standards that are already published;
- it clarifies, simplifies and promotes the usage of Harmonized Standards as the relevant means of conformity assessment.

Remarks on the present document

The present document applies to Satellite Interactive Terminals (SIT) and Satellite User Terminals (SUT) either for individual or collective use.

The present document deals with the specification defined to protect other users of the frequency spectrum, both satellite and terrestrial, from harmful interference.

The determination of the parameters of the user earth stations using a given geo-stationary satellite for the protection of the spectrum allocated to that satellite, is considered to be under the responsibility of the satellite operator or the satellite network operators.

The requirements have been selected to ensure an adequate level of compatibility with other radio services. The levels, however, do not cover extreme cases which may occur in any location but with a low probability of occurrence.

The present document may not cover those cases where a potential source of interference which is producing individually repeated transient phenomena or a continuous phenomenon is present, e.g. a radar or broadcast site in the near vicinity. In such a case it may be necessary to use special protection applied to the source of interference, or the interfered part or both.

The present document does not contain any requirement, recommendation or information about the installation of SITs and SUTs.

Typically, in case of SITs, the received signal will be a digitally modulated signal as defined in EN 300 421 [4].

1 Scope

The present document applies to Satellite Interactive Terminals (SIT) and Satellite User Terminals (SUT) operating as part of a bi-directional satellite network. Satellite Terminal (ST) is used in the present document as a generic name that refers equally to a SIT and/or a SUT.

In such a network a Network Control Facility (NCF) is responsible for the monitoring and control of the transmit functions of the STs. These STs have the following characteristics:

- in the case of SITs reception is in the Fixed Satellite Service (FSS) frequency ranges from 10,70 GHz to 11,70 GHz and from 12,50 GHz to 12,75 GHz as well as the Broadcast Satellite Service (BSS) frequency range from 11,70 GHz to 12,50 GHz;
- in the case of SUTs reception is in the Fixed Satellite Service (FSS) frequency ranges from 19,70 GHz to 20,20 GHz and from 17,70 GHz to 19,70 GHz as well as the Broadcast Satellite Service (BSS) frequency range from 21,40 GHz to 22,00 GHz;
- in all cases ST transmission is in the frequency band allocated to FSS on a primary basis from 29,5 GHz to 30,0 GHz;
- STs transmit through geostationary satellites with spacing down to 2° away from any other geostationary satellite operating in the same frequency band and covering the same area;
- linear or circular polarization is used for transmission or reception;
- the received signals may be analogue and/or digital;
- the transmitted signals are always of digital nature;
- the ST antenna diameter does not exceed 1,8 m, or equivalent corresponding aperture;
- the ST is designed for unattended operations.

STANDARD PREVIEW
(standards.iteh.ai)

https://standards.iteh.ai/catalog/standards/sist/9c1da08e-685f-47a4-bccb-

0-48c8c620f4/sist-en-301-459-v1-3-1-2006

The equipment considered in the present document comprises both the outdoor unit, usually composed of the antenna subsystem and associated upconverter, power amplifier and Low Noise Block (LNB) downconverter, and the indoor unit, usually composed of receive and transmit logic as well as the modulator, including cables between these two units.

The present document applies to the ST with its ancillary equipment and its various ports and when operated within the boundary limits of all the operational environmental profile declared by the applicant and when installed as required by the applicant by declaration or in the user documentation.

All parts of the indoor unit related to reception, processing and presentation of the received information except the control channel are not within the scope of the present document. The syntax of the control channel messages is outside the scope of the present document.

The present document is intended to cover the provisions of Directive 1999/5/EC [2] (R&TTE Directive) article 3.2, which states that "... radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference".

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of article 3 of the R&TTE Directive [2] may apply to equipment within the scope of the present document.

NOTE: A list of such ENs is included on the web site <http://www.newapproach.org/>.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

- [1] Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.
- [2] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).
- [3] CISPR No 16-1-4 (Edition 1.1): "Specification for radio disturbance and immunity measuring apparatus and methods - Part 1-4: Radio disturbance and immunity measuring apparatus - Ancillary equipment - Radiated disturbances".
- [4] ETSI EN 300 421 (V1.1.2): "Digital Video Broadcasting (DVB); Framing structure, channel coding and modulation for 11/12 GHz satellite services".
- [5] Council Directive 89/336/EEC of 3 May 1989 on the approximation of the laws of the Member States relating to electromagnetic compatibility (EMC Directive).
- [6] Council Directive 73/23/EEC of 19 February 1973 on the harmonization of the laws of Member States relating to electrical equipment designed for use within certain voltage limits (LV Directive).

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in the R&TTE Directive [2] and the following apply:

ancillary equipment: equipment used in connection with a ST is considered as ancillary if the three following conditions are met:

- the equipment is intended for use in conjunction with the ST to provide additional operational and/or control features; and
- the equipment can not be used on a stand alone basis, to provide user functions independently of the ST; and
- the absence of the equipment does not inhibit the operation of the ST

applicant: manufacturer or his authorized representative within the European Community or the person responsible for placing the apparatus on the market

carrier-off state: ST is in this state when it is authorized by the Network Control Facility (NCF) to transmit, but when it does not transmit any signal

NOTE: The existence of a carrier-off state depends on the system of transmission used. For STs designed for continuous transmission mode there may be no carrier-off state.

carrier-on state: ST is in this state when it is authorized by the NCF to transmit and when it transmits a signal in a continuous or non-continuous mode

Control Channel (CC): channel or channels by which STs receive control information from the NCF for their network

NOTE: Typically the CC(s) is/are carried via the same or collocated satellite as used for transmission of user data and within the internal protocol structure of the broadcast system.

EIRP_{max}: maximum EIRP capability of the ST as declared by the applicant

EIRP_{nom}: either

- i. when uplink power control is not implemented EIRP_{max}; or
- ii. when uplink power control is implemented, the maximum required EIRP of the ST under clear sky condition as declared by the applicant.

NOTE: The applicant may declare different values of EIRP_{max} and EIRP_{nom} for each combination of occupied bandwidth and transmission parameters (see clause 4.2.1).

environmental profile: range of environmental conditions under which equipment within the scope of EN 301 459 is required to comply with the provisions of EN 301 459

indoor unit: it is composed of that part of the ST which is not part of the outdoor unit

NOTE: It is generally installed inside a building and is connected to the outdoor unit.

integral antenna: antenna which may not be removed during the tests according to the applicant's statement

nominated bandwidth: bandwidth of the ST radio frequency transmission nominated by the applicant

NOTE 1: The nominated bandwidth does not exceed 5 times the occupied bandwidth.

NOTE 2: The nominated bandwidth is wide enough to encompass all spectral elements of the transmission which have a level greater than the specified spurious radiation limits. The nominated bandwidth is wide enough to take account of the transmit carrier frequency stability. This definition is chosen to allow flexibility regarding adjacent channel interference levels which will be taken into account by operational procedures depending on the exact transponder carrier assignment situation.

occupied bandwidth: width of the signal spectrum 10 dB below the maximum inband density

outdoor unit: those parts of the ST intended to be installed outdoor, as declared by the applicant, or as indicated in the user documentation

The outdoor unit usually comprises of three main parts:

- a) the antenna sub-system which converts the incident radiation field into a guided wave and vice versa;
- b) the Low Noise Block (LNB) downconverter, which is a device that amplifies, with very low internal noise, the received signals in the Radio Frequency (RF) band and converts them to Intermediate Frequencies (IF);
- c) the upconverter and the power amplifier which convert from the IF to RF and amplify the low level RF signals for transmission through the antenna subsystem.

NOTE: The installation equipment is outside the scope of the present document. However, the antenna structures and other components directly mounted on the antenna and forming an integral part of it, are subject to the specifications of the present document.