

## SLOVENSKI STANDARD

**SIST TBR 003 E1:2004**

**01-oktober-2004**

---

8 ][ ]hUbc`ca fYyY'n]bhY[ f]fUb]a ]`gkcf]hj Ua ]`fG8 BŁ!`Df]\_`1 ]hj YbY'nU hYj Y'nU  
hfa ]bUg\_c`cdfYa c`nUdf]\_`1 Yj UbY'bUca fYyY`G8 B`dfY`cgbcj bY[ UXcgħcdU  
=G8 B

Integrated Services Digital Network (ISDN); Attachment requirements for terminal equipment to connect to an ISDN using ISDN basic access

### iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST TBR 003 E1:2004](#)

Ta slovenski standard je istoveten z: [TBR 003 Edition 1](https://standards.iteh.ai/catalog/standards/sist/37d89afe-6391-4878-9b64-82dc27d2276/sist-tbr-003-e1-2004)

---

#### ICS:

33.080	Digitalno omrežje z integriranimi storitvami (ISDN)	Integrated Services Digital Network (ISDN)
--------	---	--


**SIST TBR 003 E1:2004**

**en**

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST TBR 003 E1:2004](#)

<https://standards.iteh.ai/catalog/standards/sist/37d89afe-6391-4878-9b64-823c24d2276/sist-tbr-003-e1-2004>

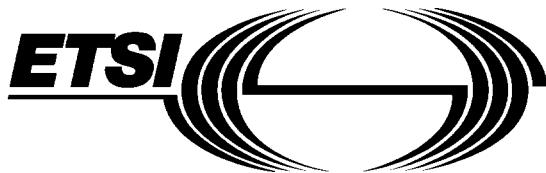

# TECHNICAL BASIS for REGULATION

**TBR 3**

November 1995

Source: ETSI TC-TE

Reference: DTBR/TE-05003

ICS: 33.080

**Key words:** ISDN, terminal equipment, basic access

**iTech STANDARD PREVIEW**  
**Integrated Services Digital Network (ISDN);**  
**(standards.itech.ai)**  
**Attachment requirements for terminal equipment to connect**  
**to an ISDN using ISDN basic access**  
SIST TBR 003 E1:2004  
<https://standards.itech.ai/catalog/standards/sist/37d89afe-6391-4878-9b64-823c24d2276/sist-tbr-003-e1-2004>

**ETSI**

European Telecommunications Standards Institute

**ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE

**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

**X.400:** c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST TBR 003 E1:2004](#)

<https://standards.iteh.ai/catalog/standards/sist/37d89afe-6391-4878-9b64-823c24d2276/sist-tbr-003-e1-2004>

## Contents

Foreword .....	13
The machine processable ATS.....	13
1    Scope .....	15
2    Normative references.....	15
3    Definitions, symbols and abbreviations .....	16
3.1    Definitions .....	16
3.2    Abbreviations .....	18
4    General.....	19
5    Definitions of primitives .....	20
5.1    Generic names .....	20
5.1.1    DL-ESTABLISH.....	20
5.1.2    DL-RELEASE .....	21
5.1.3    DL-DATA .....	21
5.1.4    DL-UNIT DATA.....	21
5.1.5    MDL-ASSIGN .....	21
5.1.6    MDL-REMOVE .....	21
5.1.7    MDL-ERROR.....	21
5.1.8    MDL-UNIT DATA.....	21
5.1.9    PH-DATA.....	22
5.1.10    PH-ACTIVATE.....	22
5.1.11    PH-DEACTIVATE.....	22
5.1.12    MPH-INFORMATION.....	22
5.2    Primitive types.....	22
5.2.1    REQUEST .....	22
5.2.2    INDICATION.....	22
5.2.3    RESPONSE .....	22
5.2.4    CONFIRM.....	23
5.3    Parameter definition.....	23
5.3.1    Priority indicator.....	23
5.3.2    Message unit .....	23
6    Safety requirements .....	24
7    Electro-Magnetic Compatibility (EMC) requirements .....	25
8    Overvoltage protection requirements .....	25
8.1    Impulse transfer from mains, common mode.....	25
8.2    Impulse transfer from mains, transverse mode .....	25
8.3    Conversion of common mode to transverse mode.....	25
9    Layer 1 requirements .....	26
9.1    Physical characteristics.....	26
9.1.1    Case A.....	26
9.1.2    Case B.....	27
9.1.3    Case C .....	27
9.1.4    Standard ISDN basic access TE cord.....	28
9.1.5    ISDN reference cord.....	28
9.2    Electrical characteristics .....	29
9.2.1    Bit rate .....	29
9.2.2    Jitter and bit-phase relationship between TE input and output .....	29

9.2.2.1	Test configurations.....	29
9.2.2.2	Timing extraction jitter.....	31
9.2.2.3	Total phase deviation input to output .....	31
9.2.3	TE transmitter output impedance .....	32
9.2.4	Pulse shape and amplitude (binary ZERO) .....	33
9.2.5	Pulse unbalance .....	34
9.2.5.1	Pulse amplitude when transmitting a high density pattern ..	34
9.2.5.2	Pulse unbalance of an isolated couple of pulses .....	34
9.2.6	Voltage on other test loads .....	35
9.2.6.1	400 Ω load.....	35
9.2.6.2	5,6 Ω load.....	37
9.2.7	Longitudinal conversion loss of the transmitter output .....	37
9.2.8	TE receiver input impedance .....	39
9.2.9	Receiver sensitivity - Noise and distortion immunity.....	39
9.2.10	Longitudinal Conversion Loss (LCL) of the receiver inputs .....	39
9.3	Functional characteristics.....	40
9.3.1	Binary organization of the frame.....	40
9.3.1.1	TE to NT.....	40
9.3.1.2	NT to TE.....	41
9.3.1.3	Relative bit positions .....	41
9.3.2	Line code .....	41
9.4	Interface procedure .....	42
9.4.1	D-channel access procedure .....	42
9.4.1.1	Interframe (Layer 2) time fill .....	42
9.4.1.2	Multipoint contention resolution mechanism .....	42
9.4.1.3	Collision detection .....	42
9.4.2	Activation/deactivation .....	43
9.4.2.1	TE states .....	43
9.4.2.1.1	State F1 (Inactive).....	43
9.4.2.1.2	State F2 (Sensing) .....	43
9.4.2.1.3	State F3 (Deactivated) .....	43
9.4.2.1.4	State F4 (awaiting signal).....	43
9.4.2.1.5	State F5 (identifying input) .....	43
9.4.2.1.6	State F6 (synchronized) .....	43
9.4.2.1.7	State F7 (activated) .....	44
9.4.2.1.8	State F8 (lost framing).....	44
9.4.2.2	Signals .....	44
9.4.2.3	Activation/deactivation procedure for TEs .....	44
9.4.2.3.1	Specification of the procedure.....	44
9.4.2.3.2	Timer values.....	50
9.4.2.4	TE activation times.....	51
9.4.2.5	Deactivation times.....	51
9.4.3	Frame alignment procedures.....	51
9.4.4	Multiframing .....	52
9.4.5	Idle Channel Code on the B-Channels .....	52
9.5	Power feeding .....	52
9.5.1	Functions specified at the access leads .....	52
9.5.2	Current transient.....	52
9.5.3	Power Source 1 consumption.....	52
9.5.3.1	Normal power conditions .....	52
9.5.3.2	Restricted power conditions .....	53
9.5.3.2.1	Power available to the TE "designated" for restricted power operation .....	53
9.5.3.2.2	Power available to locally powered and "non-designated" TEs.....	53
9.5.4	Galvanic isolation.....	53
9.5.5	Limitations on power source and sink during transient conditions .....	54
9.5.5.1	Current/time limitations for TEs .....	54
9.5.5.1.1	Current/time limitations for remotely powered TEs in normal mode .....	54
9.5.5.1.2	Current/time limitations for designated TEs in restricted mode .....	54

	9.5.5.1.3	Current/time limitations for non-designated and locally powered TEs in restricted mode .....	54
	9.5.5.1.4	Protection against PS1 interruption .....	55
9.5.5.2	Other TE requirements .....	56	
	9.5.5.2.1	Minimum TE start up current .....	56
	9.5.5.2.2	Protection against short term interruptions .....	57
	9.5.5.2.3	Behaviour at the switch-over.....	57
9.5.5.3	Current unbalance .....	58	
	9.5.5.3.1	DC unbalance of power sink 1 .....	58
	9.5.5.3.2	Current unbalance in a pair.....	58
10	Layer 2 requirements .....	60	
10.1	Frame structure for peer-to-peer communication.....	60	
	10.1.1 General.....	60	
	10.1.2 Flag sequence.....	60	
	10.1.3 Address field.....	61	
	10.1.4 Control field .....	61	
	10.1.5 Information field.....	61	
	10.1.6 Transparency .....	61	
	10.1.7 Frame Check Sequence (FCS) field .....	61	
	10.1.8 Format convention.....	62	
	10.1.8.1 Numbering convention.....	62	
	10.1.8.2 Order of bit transmission .....	62	
	10.1.8.3 Field mapping convention.....	62	
10.1.9	Invalid or incompatible frames .....	63	
10.2	Elements of procedures and formats of fields for data link layer peer-to-peer communication.....	63	
	10.2.1 General.....	63	
	10.2.2 Address field format .....	63	
	10.2.3 Address field variables .....	63	
	10.2.3.1 Address field extension bit (EA) .....	63	
	10.2.3.2 Command/Response field bit (C/R).....	64	
	10.2.3.3 Service Access Point Identifier (SAPI) .....	64	
	10.2.3.4 Terminal Endpoint Identifier (TEI).....	64	
	10.2.3.4.1 TEI for broadcast data link connection .64		
	10.2.3.4.2 TEI for point-to-point data link connection.....	65	
10.2.4	Control field formats .....	65	
	10.2.4.1 Information transfer (I) format.....	65	
	10.2.4.2 Supervisory (S) format.....	66	
	10.2.4.3 Unnumbered (U) format .....	66	
10.2.5	Control field parameters and associated state variables .....	66	
	10.2.5.1 Poll/Final bit .....	66	
	10.2.5.2 Multiple frame operation - variables and sequence numbers.....	66	
	10.2.5.2.1 Modulus .....	66	
	10.2.5.2.2 Send state variable V(S) .....	66	
	10.2.5.2.3 Acknowledge state variable V(A).....	67	
	10.2.5.2.4 Send sequence number N(S) .....	67	
	10.2.5.2.5 Receive state variable V(R) .....	67	
	10.2.5.2.6 Receive sequence number N(R) .....	67	
10.2.6	Frame types .....	67	
	10.2.6.1 Commands and responses .....	67	
	10.2.6.2 Information (I) command .....	68	
	10.2.6.3 Set Asynchronous Balanced Mode Extended (SABME) command.....	68	
	10.2.6.4 DISConnect (DISC) command .....	68	
	10.2.6.5 Unnumbered Information (UI) command.....	68	
	10.2.6.6 Receive Ready (RR) command/response .....	69	
	10.2.6.7 REject (REJ) command/response .....	69	
	10.2.6.8 Receive Not Ready (RNR) command/response.....	69	

	10.2.6.9	Unnumbered Acknowledgement (UA) response .....	69
	10.2.6.10	Disconnected Mode (DM) response .....	70
10.3	Provision of point-to-point signalling connections .....	70	
10.4	Procedures for unacknowledged information transfer .....	70	
	10.4.1	Transmission of unacknowledged information .....	70
	10.4.2	Receipt of unacknowledged information .....	70
10.5	Terminal Endpoint Identifier (TEI) management procedures .....	71	
	10.5.1	General .....	71
	10.5.2	TEI assignment procedure .....	71
	10.5.2.1	Expiry of timer T202.....	72
	10.5.3	TEI check procedure .....	72
	10.5.4	TEI removal procedure .....	73
	10.5.4.1	Action taken by the data link layer entity receiving the MDL-REMOVE-REQUEST primitive.....	73
	10.5.4.2	Conditions for TEI removal .....	73
10.5.5	TEI identity verify procedure .....	73	
	10.5.5.1	General .....	73
	10.5.5.2	Operation of the TEI identity verify procedure.....	73
	10.5.5.3	Expiry of timer T202.....	73
10.5.6	Formats and codes.....	74	
	10.5.6.1	General .....	74
	10.5.6.2	Layer management entity identifier .....	75
	10.5.6.3	Reference number (Ri) .....	75
	10.5.6.4	Message type.....	75
	10.5.6.5	Action indicator (Ai) .....	75
10.6	Procedures for establishment and release of multiple frame operation.....	75	
	10.6.1	Establishment of multiple frame operation .....	75
	10.6.1.1	General .....	75
	10.6.1.2	Establishment procedures .....	76
	10.6.1.3	Procedure on expiry of timer T200.....	77
	10.6.2	Termination of multiple frame operation .....	77
	10.6.3	Collision of unnumbered commands and responses .....	77
	10.6.3.1	Identical transmitted and received commands .....	77
10.7	Procedures for information transfer in multiple frame operation.....	77	
	10.7.1	Transmitting I-frames.....	77
	10.7.2	Receiving I-frames.....	78
	10.7.2.1	P bit set to 1 .....	78
	10.7.2.2	P bit set to 0 .....	78
	10.7.3	Receiving acknowledgements .....	79
	10.7.4	Receiving REJ frames .....	79
	10.7.5	Receiving RNR frames .....	80
	10.7.5.1	Receiving a valid RNR command or response .....	80
	10.7.5.2	Expiry of timer T200 during "peer receiver busy" .....	80
	10.7.5.3	Receiving a valid RNR command or response during "peer receiver busy" .....	81
	10.7.5.4	Receiving a valid RR or REJ command or response during "peer receiver busy" .....	81
	10.7.5.5	Appropriate supervisory response frame .....	81
	10.7.6	Waiting acknowledgement.....	81
10.8	Re-establishment of multiple frame operation .....	82	
10.9	Exception condition reporting and recovery .....	82	
	10.9.1	N(S) sequence error .....	82
	10.9.2	Invalid frame condition.....	83
	10.9.3	Frame rejection condition .....	83
	10.9.4	Multiple-assignment of TEI value.....	83
10.10	List of system parameters .....	83	
	10.10.1	Timer T200 .....	83
	10.10.2	Maximum number of retransmissions (N200) .....	84
	10.10.3	Maximum number of octets in an information field (N201) .....	84
	10.10.4	Maximum number of transmission of the TEI identity request message (N202).....	84
	10.10.5	Maximum number of outstanding I-frames (k) .....	84
	10.10.6	Timer T202 .....	84

10.10.7	Layer 2 response time .....	84
11	Layer 3 requirements .....	85
11.1	Overview of call control .....	85
11.1.1	Call states at the user side of the interface .....	85
11.1.1.1	Null state (U0).....	85
11.1.1.2	Call initiated (U1) .....	85
11.1.1.3	Overlap sending (U2).....	85
11.1.1.4	Outgoing call proceeding (U3).....	85
11.1.1.5	Call delivered (U4) .....	85
11.1.1.6	Call present (U6).....	85
11.1.1.7	Call received (U7) .....	86
11.1.1.8	Connect request (U8) .....	86
11.1.1.9	Incoming call proceeding (U9).....	86
11.1.1.10	Active (U10) .....	86
11.1.1.11	Disconnect request (U11).....	86
11.1.1.12	Disconnect indication (U12).....	86
11.1.1.13	Suspend request (U15) .....	86
11.1.1.14	Resume request (U17) .....	86
11.1.1.15	Release request (U19) .....	87
11.1.1.16	Overlap receiving (U25).....	87
11.1.2	Network call states .....	87
11.1.2.1	Null state (N0).....	87
11.1.2.2	Call initiated (N1) .....	87
11.1.2.3	Overlap sending (N2).....	87
11.1.2.4	Outgoing call proceeding (N3).....	87
11.1.2.5	Call delivered (N4) .....	87
11.1.2.6	Call present (N6).....	87
11.1.2.7	Call received (N7) .....	88
11.1.2.8	Connect request (N8) .....	88
11.1.2.9	Incoming call proceeding (N9).....	88
11.1.2.10	Active (N10) .....	88
11.1.2.11	Disconnect request (N11).....	88
11.1.2.12	Disconnect indication (N12) .....	88
11.1.2.13	Suspend request (N15) .....	88
11.1.2.14	Resume request (N17) .....	88
11.1.2.15	Release request (N19) .....	89
11.1.2.16	Call abort (N22) .....	89
11.1.2.17	Overlap receiving (N25).....	89
11.1.3	States associated with the global call reference .....	89
11.1.3.1	Call states at the user side of the interface .....	89
11.1.3.1.1	Null (Rest 0) .....	89
11.1.3.1.2	Restart (Rest 2) .....	89
11.1.3.2	Call states at the network side of the interface .....	89
11.1.3.2.1	Null (Rest 0) .....	89
11.1.3.2.2	Restart request (Rest 1) .....	89
11.2	Message functional definitions and content .....	90
11.2.1	Alerting .....	92
11.2.2	Call proceeding .....	93
11.2.3	Connect .....	94
11.2.4	Connect acknowledge .....	95
11.2.5	Disconnect .....	95
11.2.6	Information .....	96
11.2.7	Notify .....	96
11.2.8	Progress .....	97
11.2.9	Release .....	98
11.2.10	Release complete .....	98
11.2.11	Resume .....	99
11.2.12	Resume acknowledge .....	99
11.2.13	Resume reject .....	100
11.2.14	Setup .....	101
11.2.15	Setup acknowledge .....	102
11.2.16	Status .....	102

11.2.17	Status enquiry .....	103
11.2.18	Suspend.....	103
11.2.19	Suspend acknowledge.....	104
11.2.20	Suspend reject.....	104
11.2.21	Messages used with the global call reference .....	104
	11.2.21.1    Restart.....	105
	11.2.21.2    Restart acknowledge .....	105
11.3	General message format and information elements coding .....	106
11.3.1	Overview.....	106
11.3.2	Protocol discriminator .....	106
11.3.3	Call reference .....	107
11.3.4	Message type.....	108
11.3.5	Other information elements .....	109
	11.3.5.1    Coding rules.....	109
	11.3.5.1.1    Codeset 0.....	111
	11.3.5.2    Extensions of codesets .....	112
	11.3.5.3    Locking shift procedure.....	113
	11.3.5.4    Non-locking shift procedure .....	114
	11.3.5.5    Bearer capability .....	115
	11.3.5.6    Call identity.....	124
	11.3.5.7    Call state .....	124
	11.3.5.8    Called party number.....	125
	11.3.5.9    Called party subaddress .....	128
	11.3.5.10   Cause.....	129
	11.3.5.11   Channel identification.....	137
	11.3.5.12   High layer compatibility .....	139
	11.3.5.13   Low layer compatibility .....	142
	11.3.5.14   Notification indicator.....	152
	11.3.5.15   Progress indicator.....	152
	11.3.5.16   Restart indicator.....	154
	11.3.5.17   Sending complete .....	154
11.4	Circuit switched call control procedures .....	154
11.4.1	Call establishment at the originating interface .....	155
	11.4.1.1   Call request.....	155
	11.4.1.2   Overlap sending .....	155
	11.4.1.3   Call proceeding .....	155
	11.4.1.3.1    Call proceeding, en-bloc sending.....	155
	11.4.1.3.2    Call proceeding, overlap sending .....	156
	11.4.1.4   Call confirmation indication .....	156
	11.4.1.5   Call connected .....	156
11.4.2	Call establishment at the destination interface .....	156
	11.4.2.1   Incoming call .....	156
	11.4.2.2   Address and compatibility checking .....	157
	11.4.2.2.1    Compatibility checking.....	157
	11.4.2.2.2    Address checking.....	157
	11.4.2.3   B-channel selection-destination .....	158
	11.4.2.3.1    SETUP message delivered by point-to-point data link.....	158
	11.4.2.3.2    SETUP message delivered by broadcast data link.....	158
	11.4.2.4   Overlap receiving .....	159
	11.4.2.5   Call confirmation .....	159
	11.4.2.5.1    Response to en-bloc SETUP or completion of overlap receiving.....	159
	11.4.2.6   Call accept .....	160
	11.4.2.7   Active indication .....	160
	11.4.2.8   Non-selected user clearing .....	160
11.4.3	Call clearing .....	160
	11.4.3.1   Terminology .....	160
	11.4.3.2   Exception conditions .....	160
	11.4.3.3   Clearing initiated by the user.....	161
	11.4.3.4   Clearing initiated by the network .....	161

	11.4.3.4.1	Clearing when tones/announcements provided .....	161
	11.4.3.4.2	Clearing when tones/announcements not provided .....	161
	11.4.3.4.3	Completion of clearing .....	162
11.4.4	11.4.3.5	Clear collision .....	162
	Call rearrangements.....	162	
	11.4.4.1	Call suspension .....	163
	11.4.4.2	Call suspended.....	163
	11.4.4.3	Call suspend error .....	163
	11.4.4.4	Call re-establishment.....	163
	11.4.4.5	Call resume errors .....	163
	11.4.4.6	Double suspension .....	164
11.4.5	Call collisions.....	164	
11.4.6	Handling of error conditions .....	164	
	11.4.6.1	Protocol discrimination error.....	164
	11.4.6.2	Call reference procedural errors.....	164
	11.4.6.3	Message type or message sequence errors .....	165
	11.4.6.4	Duplicated information elements .....	166
	11.4.6.5	Mandatory information element errors.....	166
	11.4.6.5.1	Mandatory information element missing.....	166
	11.4.6.5.2	Mandatory information element content error .....	166
	11.4.6.6	Non-mandatory information element errors.....	167
	11.4.6.6.1	Unrecognized information element ....	167
	11.4.6.6.2	Non-mandatory information element content error .....	168
	11.4.6.7	Status enquiry procedure.....	168
	11.4.6.8	Receiving a STATUS message .....	169
11.4.7	User notification procedure.....	169	
11.4.8	Restart procedure.....	169	
11.5	TE timers .....	170	
	<a href="https://standards.iteh.ai/catalog/standards/sist/37d89afe-6391-4878-9b64-835c24d2270/sist-tbr-003-e1-2004">https://standards.iteh.ai/catalog/standards/sist/37d89afe-6391-4878-9b64-835c24d2270/sist-tbr-003-e1-2004</a>		
Annex A (normative):	TBR Requirements Table (TBR-RT) .....	171	
A.1	Guidance for completion of the TBR-RT .....	171	
A.2	Layer 1 and overvoltage requirements TBR-RT .....	172	
A.3	Layer 2 TBR-RT .....	175	
A.4	Layer 3 TBR-RT .....	178	
Annex B (normative):	Conformance test principles for Layer 1.....	181	
B.1	Scope and general information .....	181	
B.1.1	Scope.....	181	
B.1.2	General information .....	181	
B.1.3	Definitions and abbreviations.....	181	
B.1.4	Environmental conditions.....	182	
B.1.5	Test case selection .....	182	
B.2	Electrical characteristics tests .....	187	
B.2.1	Bit rate when transmitting an INFO 1 .....	187	
B.2.2	TE jitter characteristics .....	188	
B.2.2.1	TE jitter measurement characteristics (test A) .....	188	
B.2.2.2	TE output phase deviation (test B) .....	189	
B.2.3	TE transmitter output impedance.....	191	
B.2.3.1	Test A .....	191	
B.2.3.2	Test B .....	192	
B.2.3.3	Test C .....	193	
B.2.3.4	Test D .....	194	

iTeh STANDARD PREVIEW  
(Standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/37d89afe-6391-4878-9b64-835c24d2270/sist-tbr-003-e1-2004>

B.2.3.5	Test E .....	195
B.2.4	Pulse shape and amplitude .....	196
B.2.5	Pulse unbalance .....	197
	B.2.5.1    Pulse amplitude .....	197
	B.2.5.2    Pulse unbalance of an isolated couple of pulses .....	198
B.2.6	Voltage on other test loads .....	199
	B.2.6.1    Test A .....	199
	B.2.6.2    Test B .....	200
B.2.7	Longitudinal conversion loss of transmitter output .....	201
B.2.8	Receiver input characteristics .....	202
	B.2.8.1    TE receiver input impedance .....	202
	B.2.8.1.1    Test A .....	202
	B.2.8.1.2    Test B .....	203
	B.2.8.1.3    Test C .....	204
	B.2.8.1.4    Test D .....	205
	B.2.8.2    Receiver sensitivity - noise and distortion immunity .....	206
	B.2.8.3    Unbalance about earth of receiver input .....	207
B.3	Functional characteristic tests .....	208
B.3.1	Binary organisation of frame .....	208
	B.3.1.1    Test A .....	208
	B.3.1.2    Test B .....	210
B.4	Interface procedure tests .....	211
B.4.1	Test case selection .....	211
B.4.2	Layer 1 test suite .....	214
Suite overview .....	<b>iTeh STANDARD PREVIEW</b>	214
Declarations Part .....	<b>(standards.iteh.ai)</b>	224
Constraints Part .....	<a href="#">SIST TBR 003 E1:2004</a>	237
Dynamic Part .....	<a href="https://standards.iteh.ai/catalog/standards/sist/37d89afe-6391-4878-9b64-823c24d2276/sist-tbr-003-e1-2004">https://standards.iteh.ai/catalog/standards/sist/37d89afe-6391-4878-9b64-823c24d2276/sist-tbr-003-e1-2004</a>	254
B.5	Power feeding .....	336
B.5.1	Normal power conditions .....	337
	B.5.1.1    Normal power provision (Test A) .....	337
	B.5.1.2    Normal power provision (Test B) .....	338
	B.5.1.3    Normal power provision (Test C) .....	339
	B.5.1.4    Normal power provision (Test D) .....	340
B.5.2	Restricted power conditions .....	341
	B.5.2.1    Restricted power provision (Test A) .....	341
	B.5.2.2    Restricted power provision (Test B) .....	342
	B.5.2.3    Restricted power provision (Test C) .....	343
	B.5.2.4    Restricted power provision (Test D) .....	344
	B.5.2.5    Restricted power provision (Test F) .....	345
B.5.3	Current transient .....	346
B.5.4	Limitation on power sink during transient conditions .....	347
	B.5.4.1    Current/time limitation for TE .....	347
	B.5.4.2    Current/time limitation for TE when connecting .....	348
	B.5.4.3    Behaviour of a TE using a connection detector .....	349
	B.5.4.4    Power start-up test .....	350
	B.5.4.4.1    Power start-up test after removal of short-circuit .....	350
	B.5.4.4.2    Power start-up test at low input voltage .....	351
	B.5.4.5    Protection against short-term interruptions .....	352
	B.5.4.5.1    Normal power .....	352
	B.5.4.5.2    Restricted power .....	353
	B.5.4.6    Behaviour at the switch-over .....	354
	B.5.4.6.1    Normal power .....	354
	B.5.4.6.2    Restricted power .....	355
	B.5.4.7    DC unbalance of TEs using power sink 1 .....	356
	B.5.4.8    Effect of current unbalance .....	357

B.5.5	Galvanic isolation .....	358
Annex C (normative):	Layer 2 tests .....	359
C.1	Test case selection .....	359
C.2	Layer 2 test suite .....	360
Suite overview .....		360
Declarations Part.....		368
Constraints Part.....		378
Dynamic Part.....		392
Annex D (normative):	Layer 3 tests .....	436
D.1	Test case selection .....	436
D.2	Layer 3 test suite .....	438
Suite overview .....		438
Declarations Part.....		453
Constraints Part.....		472
<b>iTeh STANDARD PREVIEW</b> <b>(standards.iteh.ai)</b>		
Dynamic Part.....		506
Annex E (informative):	Protocol Implementation eXtra Information for Testing (PIXIT) .....	571
E.1	Introduction <a href="https://standards.iteh.ai/catalog/standards/sist/37d89afe-6391-4878-9b64-823c24d2276/sist-tbr-003-e1-2004">https://standards.iteh.ai/catalog/standards/sist/37d89afe-6391-4878-9b64-823c24d2276/sist-tbr-003-e1-2004</a> .....	571
E.2	References .....	571
E.3	Proforma structure and contents.....	571
E.4	Table/item identification.....	571
E.5	Guidance on completing the PIXIT .....	571
E.6	Environmental test conditions .....	572
E.7	Layer 1 PIXIT .....	573
E.8	Layer 2 PIXIT .....	575
E.9	Layer 3 PIXIT .....	577
Annex F (informative):	Justifications for the requirements in the TBR .....	580
F.1	Principles applicable to the whole TBR .....	580
F.1.1	General principles .....	580
F.1.2	Requirements versus definitions.....	580
F.1.3	Error conditions.....	580
F.1.4	General editorial changes to text from the base standards .....	581
F.1.5	Detailed list of changes with respect to the base standards.....	581
F.1.6	Untested requirements .....	582
F.1.7	Primitives .....	582
F.1.8	Supplementary services.....	583
F.1.9	Article 4(e) of the Directive.....	584

F.2	Changes with respect to ETS 300 012 .....	585
F.2.1	Layer 1 general principles .....	585
F.2.2	Layer 1 tests.....	585
F.2.3	Protection requirements .....	586
F.2.4	Detailed list of changes with respect to ETS 300 012 .....	586
F.3	Changes with respect to ETS 300 125 .....	598
F.3.1	General.....	598
F.3.2	Layer 2 response time.....	598
F.3.3	Detailed list of changes with respect to ETS 300 125.....	599
F.4	Changes with respect to ETS 300 102-1 .....	618
F.4.1	General.....	618
F.4.2	Messages and information elements .....	618
F.4.3	Layer 3 response time.....	618
F.4.4	B-channels .....	618
F.4.5	Cause values.....	619
F.4.6	Receipt of RESTART .....	619
F.4.7	Layer 3 timers.....	620
F.4.8	Detailed list of changes with respect to ETS 300 102-1.....	620
F.5	Changes with respect to I-ETS 300 313.....	635
F.5.1	Change of use of timer TAC (Layer 2 response time) .....	635
F.5.2	Change of timer tolerances .....	635
F.5.3	Change of timer TWL3 (Layer 3 response time).....	635
F.5.4	Detailed list of changes with respect to I-ETS 300 313.....	636
F.6	Changes with respect to I-ETS 300 322.....	639
F.6.1	Basic Access, point-to-point configurations .....	639
F.6.2	Change of test case identifiers.....	639
F.6.3	Changes of constraints .....	639
F.6.4	Changes to required Cause values .....	639
F.6.5	Inclusion of testing RESTART procedures for basic access.....	639
	<a href="https://standards.iteh.ai/catalog/standards/sist/37d89afe-6391-4878-9b64">https://standards.iteh.ai/catalog/standards/sist/37d89afe-6391-4878-9b64</a>	
Annex G (normative):	List of supported telecommunication services 04.....	640
G.1	Basic telecommunication services.....	640
G.2	Supplementary services .....	640
Annex H (informative):	Bibliography .....	641
History .....		647

## Foreword

This Technical Basis for Regulation (TBR) has been produced by the Terminal Equipment (TE) Technical Committee of the European Telecommunications Standards Institute (ETSI). This TBR resulted from a mandate from the Commission of the European Community (CEC) to provide harmonized standards for the support of the Directive 91/263/EEC.

Annex F provides information relating to the articles of the Directive 91/263/EEC.

Annexes A, B, C, D and G are normative whereas annexes E, F and H are informative.

## The machine processable ATS

The electronic forms of the machine processable files (TTCN MP format) corresponding to the ATS for Layers 1, 2 and 3 are contained in ASCII text files (DBV00031.MP (Layer 1), DBV00032.MP (Layer 2) and DBV00033.MP (Layer 3)) on the diskette included as a part of this TBR.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST TBR 003 E1:2004](#)

<https://standards.iteh.ai/catalog/standards/sist/37d89afe-6391-4878-9b64-823c24d2276/sist-tbr-003-e1-2004>