INTERNATIONAL STANDARD

ISO 1496-1

Fifth edition 1990-08-15

AMENDMENT 2 1998-07-01

Series 1 freight containers — Specification and testing —

Part 1:

General cargo containers for general purpose

iTeh STAENBARNT BREVIEW (standards.iteh.ai)



Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

iTeh STANDARD PREVIEW

Amendment 2 to International Standard ISO 1496-1:1990 was prepared by Technical Committee ISO/TC 104, *Freight containers*, Subcommittee SC 1, *General purpose containers*.

ISO 1496-1:1990/Amd 2:1998

ISO 1496 consists of the followingaparts; inder the general stille 6 Series 711c8b-4f8b-8f4afreight containers — Specification and testing 495914/iso-1496-1-1990-and-2-1998

- Part 1: General cargo containers for general purposes
- Part 2: Thermal containers
- Part 3: Tank containers for liquids, gases and pressurized dry bulk
- Part 4: Non-pressurized containers for dry bulk
- Part 5: Platform and platform-based containers.

© ISO 1998

International Organization for Standardization Case postale 56 • CH-1211 Genève 20 • Switzerland Internet iso@iso.ch

Printed in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

Series 1 freight containers — Specification and testing —

Part 1: General cargo containers for general purpose

AMENDMENT 2

Page 3

Subclause 5.7 Door opening

Replace the last paragraph of 57 by the following text: RD PREVIEW

"Closed-type containers designated **1AA and 1BB (types 00 and 02**) shall have a door opening, preferably having dimensions equal to those of the internal cross-section of the containers and, in any case, not less than 2 566 mm high and 2 286 mm wide." ISO 1496-1:1990/Amd 2:1998

This text cancels and replaces the text dealing with 5.7 given in Amendment 1 to ISO 1496-1 (ISO 1496-1:1990/Amd. 1:1993).

Page 4

Delete subclause 5.8.2 Grappler arms or similar devices

Renumber subclause 5.8.3 as 5.8.2.

Renumber subclause 5.8.4 as 5.8.3.

Subclause 6.1 Testing — General

Replace the last sentence of 6.1 by the following text:

"Although the tests are numbered in a certain order, they may be carried out in a different order if more appropriate to optimize utilization of the testing facilities or interpretation of the results.

However, the weatherproofness test shall always be performed after all structural tests have been completed."

Page 5

Delete the note in Table 3 — Forces to be applied in stacking test.

Page 8

Delete subclause 6.13 Test No. 12 — Lifting from the base at grappler arm positions.

Renumber subclause 6.14 as 6.13.

Page 21

Delete annex D.

Page 22

Reletter annex E as annex D and figure E.1 as figure D.1.

Page 23

Reletter annex F as annex E.

Replace the first and second paragraphs of subclause F.3.1 (now E.3.1) by the following text:

"For proof testing of cargo-securing devices, a tensile force equal to 1,5 times the rated load shall be applied, using a hook or shackle having a maximum diameter of 20 mm, the base frame of the container being approximately horizontal.

For cargo-securing devices positioned at the floor plane along the length of the container, this test force shall be applied in a transverse plane and at an angle of 45° to the horizontal (see figure E.1).

For cargo-securing devices positioned at the floor plane across the width of the container, this test force shall be applied in a longitudinal plane and at an angle of 45° to the horizontal (see figure E.1).

standards.iten.ai)

For devices installed at the roof plane (or other extreme heights), the test angle shall be 45° downwards."

Add the following new figure E.1.

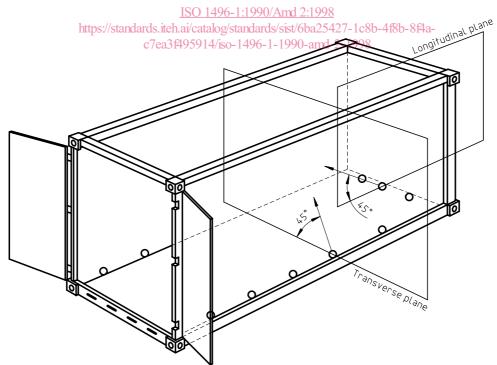


Figure E.1 — Cargo-securing devices — Examples of directions of application of test loadings

Page 24

Reletter annex G as annex F.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 1496-1:1990/Amd 2:1998 https://standards.iteh.ai/catalog/standards/sist/6ba25427-1c8b-4f8b-8f4ac7ea3f495914/iso-1496-1-1990-amd-2-1998

iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>ISO 1496-1:1990/Amd 2:1998</u> https://standards.iteh.ai/catalog/standards/sist/6ba25427-1c8b-4f8b-8f4ac7ea3f495914/iso-1496-1-1990-amd-2-1998

ICS 55.180.10

Descriptors: containers, freight containers, specifications, dimensions, tests, performance tests.

Price based on 2 pages

Ξ