
**Rolling bearings — Thrust needle roller and
cage assemblies, thrust washers —
Boundary dimensions and tolerances**

*Roulements — Cages à aiguilles axiales et rondelles de butée —
Dimensions d'encombrement et tolérances*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 3031:2000](https://standards.iteh.ai/catalog/standards/sist/643a7e4d-d978-4502-a097-d8f9855688bb/iso-3031-2000)

[https://standards.iteh.ai/catalog/standards/sist/643a7e4d-d978-4502-a097-
d8f9855688bb/iso-3031-2000](https://standards.iteh.ai/catalog/standards/sist/643a7e4d-d978-4502-a097-d8f9855688bb/iso-3031-2000)



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 3031:2000

<https://standards.iteh.ai/catalog/standards/sist/643a7e4d-d978-4502-a097-d8f9855688bb/iso-3031-2000>

© ISO 2000

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 3031 was prepared by Technical Committee ISO/TC 4, *Rolling bearings*, Subcommittee SC 5, *Needle roller bearings*.

This third edition cancels and replaces the second edition (ISO 3031:1979), which has been technically revised, in particular with the addition of the specification for checking and checking gauge dimensions.

IT IS STANDARD PROPERTY
(standards.iteh.ai)

ISO 3031:2000
<https://standards.iteh.ai/catalog/standards/sist/643a7e4d-d978-4502-a097-d8f9855688bb/iso-3031-2000>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 3031:2000

<https://standards.iteh.ai/catalog/standards/sist/643a7e4d-d978-4502-a097-d8f9855688bb/iso-3031-2000>

Rolling bearings — Thrust needle roller and cage assemblies, thrust washers — Boundary dimensions and tolerances

1 Scope

This International Standard specifies the boundary dimensions and tolerances for thrust needle roller and cage assemblies. Furthermore, it recommends dimensions and tolerances for thrust washers, i.e. raceway members, which can be used either as shaft or housing washers.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 286-2:1988, *ISO system of limits and fits — Part 2: Tables of standard tolerance grades and limit deviations for holes and shafts.*

<https://standards.iteh.ai/catalog/standards/sist/643a7e4d-d978-4502-a097-681965568860/iso-3031-2000>

ISO 1132-1:2000, *Rolling bearings — Tolerances — Part 1: Terms and definitions.*

ISO 3096:1996, *Rolling bearings — Needle rollers — Dimensions and tolerances.*

ISO 5593:1997, *Rolling bearings — Vocabulary.*

ISO 15241—¹⁾, *Rolling bearings — Symbols for quantities.*

3 Terms and definitions

For the purposes of this International Standard, the terms and definitions given in ISO 1132-1 and ISO 5593 apply.

1) To be published.

4 Thrust needle roller and cage assemblies

4.1 Symbols

For the purpose of this International Standard, the symbols given in ISO 15241 apply.

The symbols (except those for tolerances) shown in Figure 1 and the values given in Table 1 denote nominal dimensions unless specified otherwise.

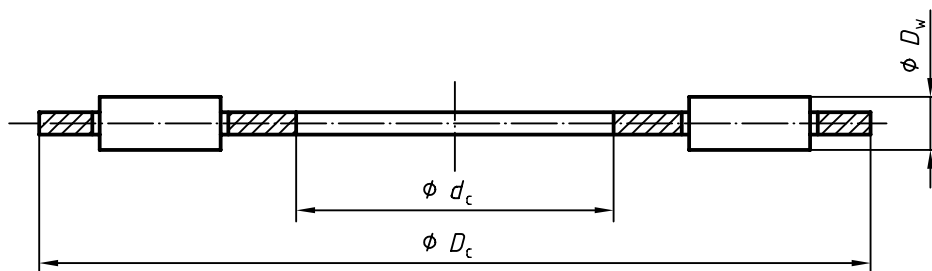


Figure 1 — Thrust needle roller and cage assembly

D_c outside diameter of cage

$D_{cs \max}$ largest single outside diameter of cage

V_{Dcs} variation of outside diameter of cage

d_c bore diameter of cage

$d_{cs \min}$ smallest bore diameter of cage

V_{dcs} variation of bore diameter of cage

D_w diameter of needle roller

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 3031:2000

<https://standards.iteh.ai/catalog/standards/sist/643a7e4d-d978-4502-a097-d8f9855688bb/iso-3031-2000>

4.2 Dimensions and tolerances

Dimensions and tolerances of thrust needle roller and cage assemblies are given in Table 1.

Table 1 — Dimensions and tolerances of thrust needle roller and cage assemblies

Dimensions in millimetres, tolerances in micrometres

d_c	Tolerances for		V_{dcs} max.	D_c	Tolerances for		V_{Dcs} max.	D_w^c
	$d_{cs\ min}^a$				$D_{cs\ max}^b$			
	high	low			high	low		
6	+ 95	+ 20	75	19	- 110	- 320	210	2
7	+ 115	+ 25	90	20	- 110	- 320	210	2
8	+ 115	+ 25	90	21	- 110	- 320	210	2
9	+ 115	+ 25	90	22	- 110	- 320	210	2
10	+ 115	+ 25	90	24	- 110	- 320	210	2
12	+ 142	+ 32	110	26	- 110	- 320	210	2
14	+ 142	+ 32	110	27	- 110	- 320	210	2
15	+ 142	+ 32	110	28	- 110	- 320	210	2
16	+ 142	+ 32	110	29	- 110	- 320	210	2
17	+ 142	+ 32	110	30	- 110	- 320	210	2
18	+ 142	+ 32	110	31	- 120	- 370	250	2
20	+ 170	+ 40	130	35	- 120	- 370	250	2
22	+ 170	+ 40	130	37	- 120	- 370	250	2
25	+ 170	+ 40	130	42	- 130	- 380	250	2
28	+ 170	+ 40	130	45	- 130	- 380	250	2
30	+ 170	+ 40	130	47	- 130	- 380	250	2
32	+ 210	+ 50	160	49	- 130	- 380	250	2
35	+ 210	+ 50	160	52	- 140	- 440	300	2
40	+ 210	+ 50	160	60	- 140	- 440	300	3
45	+ 210	+ 50	160	65	- 140	- 440	300	3
50	+ 210	+ 50	160	70	- 150	- 450	300	3
55	+ 250	+ 60	190	78	- 150	- 450	300	3
60	+ 250	+ 60	190	85	- 170	- 520	350	3
65	+ 250	+ 60	190	90	- 170	- 520	350	3
70	+ 250	+ 60	190	95	- 170	- 520	350	4
75	+ 250	+ 60	190	100	- 170	- 520	350	4
80	+ 250	+ 60	190	105	- 180	- 530	350	4
85	+ 292	+ 72	220	110	- 180	- 530	350	4
90	+ 292	+ 72	220	120	- 180	- 530	350	4
100	+ 292	+ 72	220	135	- 200	- 600	400	4
110	+ 292	+ 72	220	145	- 210	- 610	400	4
120	+ 292	+ 72	220	155	- 210	- 610	400	4
130	+ 335	+ 85	250	170	- 230	- 630	400	5
140	+ 335	+ 85	250	180	- 230	- 630	400	5
150	+ 335	+ 85	250	190	- 240	- 700	460	5
160	+ 335	+ 85	250	200	- 240	- 700	460	5

a The values in this table give the limits of the difference between $d_{cs\ min}$ and d_c .

b The values in this table give the limits of the difference between $D_{cs\ max}$ and D_c .

c For needle roller diameter values and gauges, see ISO 3096.

4.3 Checking and checking gauge dimensions

Bore diameter and outside diameter of a free thrust needle roller and cage assembly may be gauged with GO and NOT GO gauges.

For bore diameter d_c the GO plug gauge size is equal to the low limit of $d_{cs\ min}$, the NOT GO plug gauge size is equal to the high limit of $d_{cs\ min}$.

For outside diameter D_c the GO ring gauge size is equal to the high limit of $D_{cs\ max}$, the NOT GO ring gauge size is equal to the low limit of $D_{cs\ max}$.

NOTE 1 While plug gauges and ring gauges are effective tools for checking dimensions of thrust needle roller and cage assemblies, other suitable gauging or measuring practices may be employed.

NOTE 2 Needle roller grade should be agreed between customer and supplier.

5 Thrust washers

5.1 Symbols

For the purpose of this International Standard, the symbols given in ISO 15241 apply.

The symbols (except those for tolerances) shown in Figure 2 and the values given in Table 2 denote nominal dimensions unless specified otherwise.

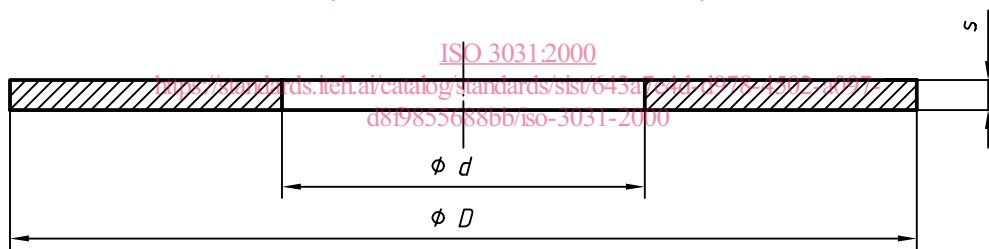


Figure 2 — Thrust washer

- D outside diameter of thrust washer
- $D_{s\ max}$ largest single outside diameter of thrust washer
- V_{Ds} variation of outside diameter of thrust washer
- d bore diameter of thrust washer
- $d_{s\ min}$ smallest single bore diameter of thrust washer
- V_{ds} variation of bore diameter of thrust washer
- s thickness of thrust washer

5.2 Dimensions and tolerances

Dimensions and tolerances of thrust washers are given in Table 2.

Table 2 — Dimensions and tolerances of thrust washers

Dimensions in millimetres, tolerances in micrometres

<i>d</i>	Tolerances for		<i>V_{ds}</i> max.	<i>D</i>	Tolerances for		<i>V_{Ds}</i> max.	<i>s</i> ^c	
	<i>d_{s min}</i> ^a				<i>D_{s max}</i> ^b			series a	series b
	high	low			high	low			
6	+ 140	+ 20	120	19	- 40	- 370	330	0,8	1
7	+ 175	+ 25	150	20	- 40	- 370	330	0,8	1
8	+ 175	+ 25	150	21	- 40	- 370	330	0,8	1
9	+ 175	+ 25	150	22	- 40	- 370	330	0,8	1
10	+ 175	+ 25	150	24	- 40	- 370	330	0,8	1
12	+ 212	+ 32	180	26	- 40	- 370	330	0,8	1
14	+ 212	+ 32	180	27	- 40	- 370	330	0,8	1
15	+ 212	+ 32	180	28	- 40	- 370	330	0,8	1
16	+ 212	+ 32	180	29	- 40	- 370	330	0,8	1
17	+ 212	+ 32	180	30	- 40	- 370	330	0,8	1
18	+ 212	+ 32	180	31	- 50	- 440	390	0,8	1
20	+ 250	+ 40	210	35	- 50	- 440	390	0,8	1
22	+ 250	+ 40	210	37	- 50	- 440	390	0,8	1
25	+ 250	+ 40	210	42	- 50	- 440	390	0,8	1
28	+ 250	+ 40	210	45	- 50	- 440	390	0,8	1
30	+ 250	+ 40	210	47	- 50	- 440	390	0,8	1
32	+ 300	+ 50	250	49	- 50	- 440	390	0,8	1
35	+ 300	+ 50	250	52	- 50	- 440	460	0,8	1
40	+ 300	+ 50	250	60	- 60	- 520	460	0,8	1
45	+ 300	+ 50	250	65	- 60	- 520	460	0,8	1
50	+ 300	+ 50	250	70	- 60	- 520	460	0,8	1
55	+ 360	+ 60	300	78	- 60	- 520	460	0,8	1
60	+ 360	+ 60	300	85	- 72	- 612	540	0,8	1
65	+ 360	+ 60	300	90	- 72	- 612	540	0,8	1
70	+ 360	+ 60	300	95	- 72	- 612	540	0,8	1
75	+ 360	+ 60	300	100	- 72	- 612	540	0,8	1
80	+ 360	+ 60	300	105	- 72	- 612	540	0,8	1
85	+ 422	+ 72	350	110	- 72	- 612	540	0,8	1
90	+ 422	+ 72	350	120	- 72	- 612	540	0,8	1
100	+ 422	+ 72	350	135	- 85	- 715	630	—	1
110	+ 422	+ 72	350	145	- 85	- 715	630	—	1
120	+ 422	+ 72	350	155	- 85	- 715	630	—	1
130	+ 485	+ 85	400	170	- 85	- 715	630	—	1
140	+ 485	+ 85	400	180	- 85	- 715	630	—	1
150	+ 485	+ 85	400	190	- 100	- 820	720	—	1
160	+ 485	+ 85	400	200	- 100	- 820	720	—	1

^a The values in the table give the limits of the difference between *d_{s min}* and *d*.

^b The values in the table give the limits of the difference between *D_{s max}* and *D*.

^c Tolerance according to tolerance class js12 in ISO 286-2