



SLOVENSKI STANDARD

SIST ISO 7-2:2001

01-september-2001

Cevni navoji s tesnjenjem na navojih - 2. del: Verifikacija z uporabo mejnih kalibrov

Pipe threads where pressure-tight joints are made on the threads -- Part 2: Verification by means of limit gauges

iTeh STANDARD PREVIEW

Filetages de tuyauterie pour raccordement avec étanchéité dans le filet -- Partie 2: Vérification par calibres à limites

[SIST ISO 7-2:2001](https://standards.iteh.ai/catalog/standards/sist/a9a92688-7e6a-46a3-8a27-cd5e7c0ee174/sist-iso-7-2-2001)

Ta slovenski standard je istoveten z: **ISO 7-2:2000**

ICS:

21.040.30 Posebni navoji Special screw threads

SIST ISO 7-2:2001

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 7-2:2001

<https://standards.iteh.ai/catalog/standards/sist/a9a92688-7e6a-46a3-8a27-cd3e7c0ee174/sist-iso-7-2-2001>

**Pipe threads where pressure-tight joints are
made on the threads —**

**Part 2:
Verification by means of limit gauges**

*Filetages de tuyauterie pour raccordement avec étanchéité dans le filet —
Partie 2: Vérification par calibres à limites*
(standards.iteh.ai)

SIST ISO 7-2:2001

<https://standards.iteh.ai/catalog/standards/sist/a9a92688-7e6a-46a3-8a27-cd3e7c0ee174/sist-iso-7-2-2001>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 7-2:2001](https://standards.iteh.ai/catalog/standards/sist/a9a92688-7e6a-46a3-8a27-cd3e7c0ee174/sist-iso-7-2-2001)

<https://standards.iteh.ai/catalog/standards/sist/a9a92688-7e6a-46a3-8a27-cd3e7c0ee174/sist-iso-7-2-2001>

© ISO 2000

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Contents

Page

Foreword.....	iv
Introduction.....	v
1 Scope	1
2 Normative reference	1
3 Terms and definitions	1
4 Symbols	2
5 Design of gauges	3
5.1 General.....	3
5.2 Taper full form threaded plug gauges (gauges No. 1 and No. 2).....	4
5.3 Parallel full form threaded ring gauge (gauge No. 3).....	8
5.4 Taper plain ring gauge (gauge No. 4)	10
5.5 Taper modified thread form check plug gauge (gauge No. 5)	11
5.6 Parallel modified thread form check ring gauge (gauge No. 6)	13
6 Use of gauges and checking of pipe threads	14
6.1 General.....	14
6.2 Checking of internal taper (Rc) and internal parallel (Rp) threads.....	15
6.3 Checking of external taper (R) threads.....	16
7 Gauge dimensions and manufacturing tolerances, checking of new gauges and checking gauges for wear	17
7.1 Gauge dimensions and manufacturing tolerances.....	17
7.2 Checking of new gauges.....	23
7.3 Checking gauges for wear	26
7.4 Marking of gauges	28
Annex A (normative) Summary of gauges.....	29

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO 7 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 7-2 was prepared by Technical Committee ISO/TC 5, *Ferrous metal pipes and metallic fittings*, Subcommittee SC 5, *Threaded or plain end butt-welding fittings, gauging of threads*.

This second edition cancels and replaces the first edition (ISO 7-2:1982), which has been technically revised.

ISO 7 consists of the following parts, under the general title *Pipe threads where pressure-tight joints are made on the threads*:

- *Part 1: Dimensions, tolerances and designation* ^{SIST ISO 7-2:2001}
<https://standards.itec.ai/catalog/standards/sist/a9a92688-7e6a-46a3-8a27-cd3e7c0ee174/sist-iso-7-2-2001>
- *Part 2: Verification by means of limit gauges*

Annex A forms a normative part of this part of ISO 7.

Introduction

This revision of ISO 7-2 has been undertaken with the aim of providing a unified gauging system which could be adopted worldwide and thus eliminate the differing gauging results obtained with the use of gauges in accordance with ISO 7-2:1982 and existing national practices. This revision also includes details of plain ring gauges to provide additional means of checking ISO 7-1 external threads and a parallel modified thread form check ring gauge for checking taper full form threaded plug gauges.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ISO 7-2:2001](https://standards.iteh.ai/catalog/standards/sist/a9a92688-7e6a-46a3-8a27-cd3e7c0ee174/sist-iso-7-2-2001)

<https://standards.iteh.ai/catalog/standards/sist/a9a92688-7e6a-46a3-8a27-cd3e7c0ee174/sist-iso-7-2-2001>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 7-2:2001

<https://standards.iteh.ai/catalog/standards/sist/a9a92688-7e6a-46a3-8a27-cd3e7c0ee174/sist-iso-7-2-2001>

Pipe threads where pressure-tight joints are made on the threads —

Part 2: Verification by means of limit gauges

1 Scope

This part of ISO 7 specifies a process using limit gauges, for the validation of taper internal and external threads and parallel internal threads on piping systems components and other products, the dimensions and tolerances of which are detailed in ISO 7-1.

The gauging system described may not be suitable, without special precautions, for gauging of threads on injection moulded plastic workpieces.

This part of ISO 7 does not cover completely all the requirements necessary for full control of thread quality and dimensions. Additional control of tools and equipment and visual inspection during production are required to ensure complete compliance with ISO 7-1, for example the length of useful thread on internally threaded workpieces should be checked by direct measurement.

Annex A gives a summary of the gauges included in this part of ISO 7, together with details of the thread elements controlled by each gauge and gauge identification numbers.

<https://standards.iteh.ai/catalog/standards/sist/a9a92688-7e6a-46a3-8a27->

In the event of a dispute over compliance with the requirements of ISO 7-1, the gauges in this part of ISO 7 are to be considered as decisive for the thread elements which they control on the workpiece.

2 Normative reference

The following normative document contains provisions which, through reference in this text, constitute provisions of this part of ISO 7. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 7 are encouraged to investigate the possibility of applying the most recent edition of the normative document indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 7-1:1994, *Pipe threads where pressure-tight joints are made on the threads — Part 1: Dimensions, tolerances and designation.*

3 Terms and definitions

For the purposes of this part of ISO 7, the terms and definitions given in ISO 7-1 and the following apply.

3.1

accommodation length

distance from the face of an internally threaded workpiece to the first obstruction which the externally threaded workpiece will encounter on assembly

See Figure 3.

4 Symbols

The symbols used and their explanations are given in Table 1.

Table 1 — Symbols

Symbol	Explanation
b_1	Width of clearance groove at major diameter of parallel full form threaded ring gauges and minor diameter of taper full form threaded plug gauges
b_2	Width of clearance groove at major diameter of parallel modified thread form check ring gauges and at minor diameter of taper modified thread form check plug gauges
c	Height of tolerance step on plug gauges
D	Major diameter of internal thread at gauge plane
D_1	Minor diameter of internal thread at gauge plane
D_2	Pitch diameter of internal thread at gauge plane
D_4	Counterbore diameter of parallel full form threaded ring gauge and taper plain ring gauge
d	Major diameter of external thread at gauge plane
d_1	Minor diameter of external thread at gauge plane
d_2	Pitch diameter of external thread at gauge plane
F	Radial distance from the pitch diameter to the truncated crest, along the centreline of the thread profile
l_0	Overall length of taper full form threaded plug gauge and taper modified thread form check plug gauge
l_1	Length from end face to the gauge plane on taper full form threaded plug gauge
l_2	Length of tolerance step on plug gauges
l_3	Overall length of parallel full form threaded ring gauge, parallel modified thread form check ring gauge and length from gauge plane to small end of taper plain ring gauge
l_4	Length of tolerance step on ring gauges
l_5	Depth of counterbore on parallel full form threaded ring gauge
l_6	Overall length of taper full form threaded plug gauge with relief
l_7	Width of relief on taper full form threaded plug gauge with relief
l_8	Length from relief on taper full form threaded plug gauge with relief to large end of gauge
l_9	Overall length of taper plain ring gauge
l_{10}	Depth of counterbore on taper plain ring gauge
l_{11}	Distance from step on gauge Nos. 1 and 2 to face of gauge No. 6 when verifying pitch diameter of new gauge Nos. 1 and 2
l_{12}	Distance from step on gauge No. 5 to face of gauge No. 6 when verifying pitch diameter of new gauge No. 6
l_{13}	Distance from step on gauge Nos. 1 and 2 to face of gauge No. 6 when checking pitch diameter of gauge Nos. 1 and 2 for wear

Table 1 (concluded)

Symbol	Explanation
l_{14}	Distance from step on gauge No. 5 to face of gauge No. 3 when checking pitch diameter of gauge No. 3 for wear
P	Pitch
$T_{\alpha_1/2}$	Tolerance on flank angle of full form threads
$T_{\alpha_2/2}$	Tolerance on flank angle of modified form threads
T_{CP}	Tolerance on pitch diameter for taper modified thread form check plug gauge and parallel modified thread form check ring gauge
T_P	Tolerance on pitch
T_{PL}	Tolerance on pitch diameter and wear allowance for taper full form threaded plug gauges
T_R	Tolerance on pitch diameter and wear allowance for parallel full form threaded ring gauge and tolerance on diameter and wear allowance for taper plain ring gauge
T_1	Tolerance on the gauge length of an external thread
T_2	Tolerance on position of gauge plane on an internal thread
W	Permissible wear on diameter of all gauges except taper modified thread form check plug gauges
NOTE The values of D , D_1 , D_2 , d , d_1 and d_2 shown in Table 2 to Table 7 are basic values and are subject to the manufacturing tolerances specified in clause 7.	

SIST ISO 7-2:2001

<https://standards.iteh.ai/catalog/standards/sist/a9a92688-7e6a-46a3-8a27-cd3e7c0ee174/sist-iso-7-2-2001>

5 Design of gauges

5.1 General

The taper full form threaded plug gauges and parallel full form threaded ring gauges (see 5.2 and 5.3) together with the taper plain ring gauges (see 5.4) have been chosen as representing the requirements for mating components or products within the tolerances of ISO 7-1.

Because of the 1:16 taper of the gauge and/or the threaded workpiece, it is possible to represent the maximum and minimum limits of diameter by means of tolerance steps within the axial length of the gauges.

The plain ring gauges included in this part of ISO 7, allow a combined check of the major diameter and the length of useful thread of externally threaded workpieces.

The taper modified thread form check plug gauge (see 5.5) and parallel modified thread form check ring gauge (see 5.6) for checking the manufacturing tolerances and wear allowances for the parallel full form threaded ring gauges and taper full form threaded plug gauges respectively, are made to a modified thread form.

Some dimensions given in this part of ISO 7 are more precise than the equivalent dimensions given in ISO 7-1. This greater precision is only intended to assist the gauge manufacturing process and is of no practical significance when using the gauges.

NOTE The expression "full form" has been used to describe those threaded plug and ring gauges which may be full form or alternatively have thread form relief at the discretion of the manufacturer, so as to differentiate from those threaded check plug and check ring gauges which are always of modified thread form.

5.2 Taper full form threaded plug gauges (gauges No. 1 and No. 2)

5.2.1 Taper full form threaded plug gauge (gauge No. 1)

This gauge is a 1:16 taper full form threaded plug gauge (see Figure 1) and is suitable for checking the major diameter (D) and pitch diameter (D_2) at the gauge plane of internal parallel (Rp) threads and internal taper (Rc) threads.

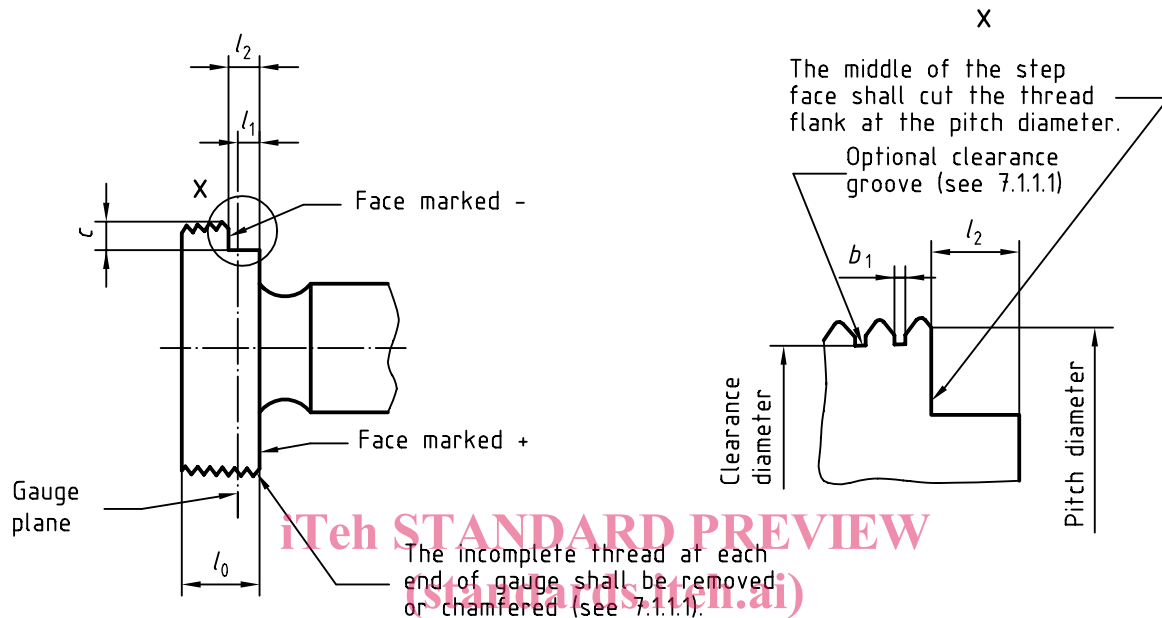


Figure 1 — Taper full form threaded plug gauge (gauge No. 1)

The dimensions of this gauge are given in Table 2 and manufacturing tolerances are given in 7.1.1.2.

The gauge incorporates a step equal in length to the total tolerance T_2 on the position of the gauge plane of the internal thread specified in ISO 7-1. To allow for the chamfer on the internal thread, the step is displaced by $0,5P$ relative to the gauge plane, such that the internally threaded workpiece can be verified with reference to its face.

The large diameter end face of the gauge is marked '+' (positive) and the face of the tolerance step is marked '-' (negative).

NOTE For sizes smaller than $1/2$, the '+' and '-' markings may be omitted if not practicable.