

# INTERNATIONAL STANDARD

# NORME INTERNATIONALE

**Electric strength of insulating materials – Test methods –  
Part 3: Additional requirements for 1,2/50  $\mu$ s impulse tests**  
(standards.iteh.ai)

**Rigidité diélectrique des matériaux isolants – Méthodes d'essai –  
Partie 3: Exigences complémentaires pour les essais  
aux ondes de choc 1,2/50  $\mu$ s**



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2013 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
Fax: +41 22 919 03 00  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

#### Useful links:

IEC publications search - [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...).

It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [csc@iec.ch](mailto:csc@iec.ch).

### A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

### A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

#### Liens utiles:

Recherche de publications CEI - [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

La recherche avancée vous permet de trouver des publications CEI en utilisant différents critères (numéro de référence, texte, comité d'études,...).

Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

Just Published CEI - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)

Restez informé sur les nouvelles publications de la CEI. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - [www.electropedia.org](http://www.electropedia.org)

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (VEI) en ligne.

Service Clients - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: [csc@iec.ch](mailto:csc@iec.ch).



IEC 60243-3

Edition 3.0 2013-11

# INTERNATIONAL STANDARD

## NORME INTERNATIONALE

**Electric strength of insulating materials – Test methods –  
Part 3: Additional requirements for 1,2/50  $\mu$ s impulse tests**

**Rigidité diélectrique des matériaux isolants – Méthodes d'essai –  
Partie 3: Exigences complémentaires pour les essais  
aux ondes de choc 1,2/50  $\mu$ s**

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

COMMISSION  
ELECTROTECHNIQUE  
INTERNATIONALE

PRICE CODE  
CODE PRIX

J

ICS 17.220.99; 29.035.01

ISBN 978-2-8322-1201-1

**Warning! Make sure that you obtained this publication from an authorized distributor.  
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

## CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references.....	5
3 Terms and definitions .....	5
4 Significance of the test.....	6
5 Electrodes and test specimens.....	7
6 Conditioning before tests .....	7
7 Surrounding medium.....	7
8 Electrical apparatus .....	7
8.1 Voltage source .....	7
8.2 Voltage measurement .....	8
9 Procedure.....	8
10 Application of voltage.....	8
10.1 Breakdown test .....	8
10.2 Proof tests .....	8
11 Criterion of breakdown.....	9
12 Number of tests .....	9
13 Report .....	9
Figure 1 – Full impulse-voltage wave.....	6

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[IEC 60243-3:2013](https://standards.iteh.ai/catalog/standards/sist/9b338178-ff20-463c-bc5a-2483821efdc3/iec-60243-3-2013)

<https://standards.iteh.ai/catalog/standards/sist/9b338178-ff20-463c-bc5a-2483821efdc3/iec-60243-3-2013>

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

---

**ELECTRIC STRENGTH OF INSULATING MATERIALS –  
TEST METHODS –**
**Part 3: Additional requirements for 1,2/50  $\mu$ s impulse tests**

## FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60243-3 has been prepared by technical committee 112: Evaluation and qualification of electrical insulation materials and systems.

This third edition cancels and replaces the second edition, published in 2001, and constitutes an editorial revision.

This part of IEC 60243 shall be read in conjunction with IEC 60243-1.

The text of this standard is based on the following documents:

CDV	Report on voting
112/246/CDV	112/267A/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 60243 series, published under the general title *Electric strength of insulating materials – Test methods*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[IEC 60243-3:2013](#)

<https://standards.iteh.ai/catalog/standards/sist/9b338178-ff20-463c-bc5a-2483821efdc3/iec-60243-3-2013>

# ELECTRIC STRENGTH OF INSULATING MATERIALS – TEST METHODS –

## Part 3: Additional requirements for 1,2/50 $\mu$ s impulse tests

### 1 Scope

This part of IEC 60243 gives requirements additional to those in IEC 60243-1 for the determination of the electric strength of solid insulating materials under 1,2/50  $\mu$ s impulse voltage stress.

### 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60243-1:2013, *Electric strength of insulating materials – Test methods – Part 1: Tests at power frequencies*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60243-1, together with the following, apply.

#### 3.1

##### full impulse-voltage wave

aperiodic transient voltage that rises rapidly to a maximum value, then falls less rapidly to zero (see Figure 1)

#### 3.2

##### peak value (of an impulse-voltage wave)

$U_P$

maximum value of voltage

#### 3.3

##### virtual peak value (of an impulse-voltage wave)

$U_1$

value derived from a recording of an impulse-voltage wave on which high-frequency oscillations, or overshoot of a limited magnitude, may be present

#### 3.4

##### virtual origin (of an impulse-voltage wave)

$O_1$

point of intersection  $O_1$  with the line of zero voltage of a line drawn through the points of 0,3 and 0,9 times the virtual peak value on the front of an impulse-voltage wave (see Figure 1)

**3.5**  
**virtual front time (of an impulse-voltage wave)**

$t_1$   
equal to 1,67 times the interval  $t_f$  between the instants when the voltage is 0,3 and 0,9 times the peak value ( $t_f$ , Figure 1)

**3.6**  
**virtual time to half-value**


$t_2$   
time interval  $t_2$  between the virtual origin  $O_1$  and the instant on the tail when the voltage has decreased to half the peak value

**3.7**  
**impulse breakdown voltage**

nominal peak voltage that the wave causing breakdown would have reached if breakdown had not occurred

**3.8**  
**withstand voltage**

highest nominal peak voltage of a set of three impulses which did not cause breakdown

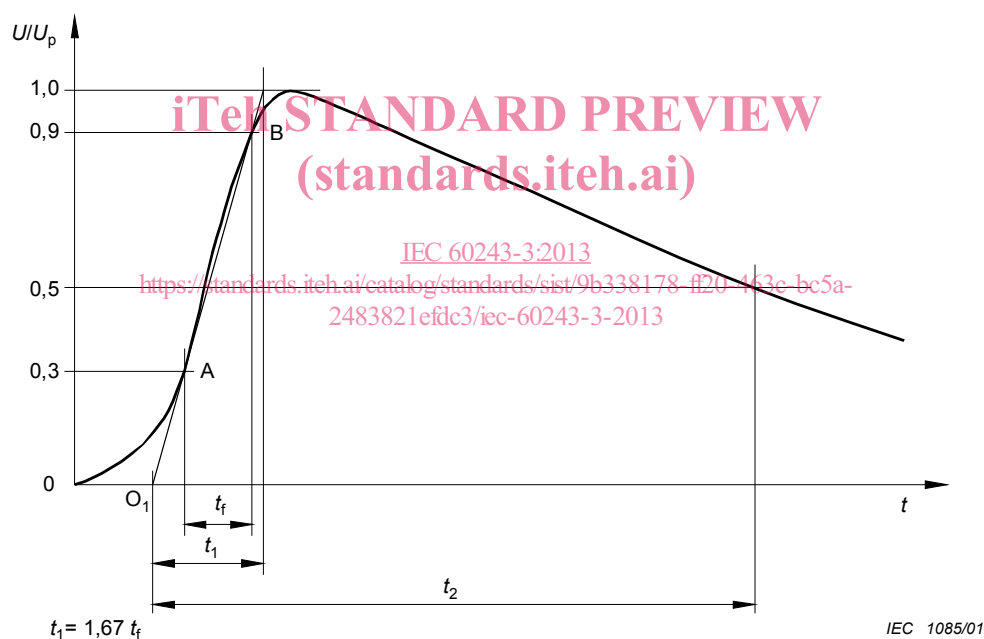

**Figure 1 – Full impulse-voltage wave**

**4 Significance of the test**

In addition to the information of Clause 4 of IEC 60243-1:2013, the following points are of importance in connection with impulse-voltage tests.

High-voltage equipment may be subjected to transient voltage stresses resulting from such causes as nearby lightning strokes. This is particularly true of apparatus such as transformers and switchgears used in electrical power transmission and distribution systems. The ability of insulating materials to withstand these transient voltages is important in establishing the reliability of apparatus insulated with these materials.

Transient voltages caused by lightning may be of either positive or negative polarity. In a symmetrical field between identical electrodes, the polarity has no effect on the electric



strength. However, with dissimilar electrodes, there may be a pronounced polarity effect. When asymmetrical electrodes are used for testing materials with which the tester has no previous experience or knowledge, it is recommended that comparative tests be made with both directions of polarity.

The standard wave shape is a 1,2/50  $\mu\text{s}$  wave, reaching peak voltage in approximately 1,2  $\mu\text{s}$ , and decaying to 50 % of peak value in approximately 50  $\mu\text{s}$  after the beginning of the wave. This wave is intended to simulate a lightning stroke that may strike a system without breakdown.

NOTE If the object being tested has appreciable inductive characteristics, it may be difficult or impossible to attain the specified wave shape with less than 5 % oscillations, as prescribed in 8.2. However, the procedures given in this standard are expected ordinarily to be applied to configurations of test specimens and electrodes which are primarily capacitive. Testing of more complex configurations, such as between coils of completed apparatus or models of such apparatus, should be performed in accordance with the specifications for that apparatus.

Because of the short time involved, dielectric heating, other thermal effects and the influence of injected space-charges may be reduced during impulse testing of most materials. Thus, impulse tests usually give higher values than the peak voltage of short-term ac tests. From comparisons of the impulse electric strength with the values drawn from longer time tests, inferences may be drawn as to the modes of failure under the various tests for a given material.

## 5 Electrodes and test specimens

Clause 5 of IEC 60243-1:2013 is applicable.

## 6 Conditioning before tests

Clause 6 of IEC 60243-1:2013 is applicable.

## 7 Surrounding medium

Clause 7 of IEC 60243-1:2013 is applicable.

## 8 Electrical apparatus

### 8.1 Voltage source

The test voltage applied to the electrodes shall be provided by an impulse generator having the following characteristics.

A choice of either positive or negative polarity shall be provided, one of the connections to the electrodes being earthed.

Controls within the generator shall be capable of adjusting the shape of the wave applied to the test specimen under test to have a virtual front time  $t_1$  of  $(1,2 \pm 0,36) \mu\text{s}$ , and virtual time to half-value  $t_2$  of  $(50 \pm 10) \mu\text{s}$  (see Figure 1).

The voltage capability and energy-storage capacity of the generator shall be sufficient to apply impulse waves of the proper shape to any test specimens to be tested, up to the breakdown voltage or specified proof voltage of the material.

The peak value of the voltage is taken as the virtual peak value, provided that the conditions of 8.2 are satisfied.

## 8.2 Voltage measurement

Provisions shall be made for recording the voltage wave as applied to the test specimen, and for measuring the virtual peak voltage, the virtual front time and the virtual time to half-value within  $\pm 5$  % of the true values.

If the voltage wave has oscillations with a magnitude of no more than 5 % of the peak value, and a frequency of at least 0,5 MHz, a mean curve may be drawn, the maximum amplitude of which is the virtual peak value. If the oscillations are of greater magnitude, or of lower frequency, the voltage wave is not acceptable for a standard test.

## 9 Procedure

Clause 9 of IEC 60243-1:2013 is applicable. However, the application of the voltage shall be as shown in Clause 10.

## 10 Application of voltage

### 10.1 Breakdown test

Breakdown tests shall be in accordance with Clause 11 of IEC 60243-1:2013.

The voltage impulses shall be applied in an increasing series of sets of three waves of equal peak voltages. The peak voltage of the initial set should be approximately 70 % of the expected breakdown voltage.

Increase the peak voltage of successive sets by 5 % to 10 % of the peak value of the first set. Table 1 of IEC 60243-1:2013 is applicable.

Allow sufficient time between successive impulses for the generator to become completely charged. Normally, a time of three times the charging time constant for the generator is sufficient.

Sufficient time shall also be allowed between successive impulses to allow dissipation of any injected space-charge. For many materials, the charging time of the generator will cover this eventuality. For materials having a longer space-charge retention time, the necessary time shall be specified in the material specification sheet. If this information is not known, but a long space-charge retention period is suspected, then additional tests should be run with longer intervals between impulses, to determine if a significant difference in breakdown values is obtained.

A valid test on a test specimen is one in which impulse waves are applied at at least two voltage levels without breakdown, before breakdown occurs at the third or a subsequent level.

The electric strength shall be based on the virtual peak voltage of the last set of three waves which was applied without breakdown. The breakdown voltage is the nominal voltage of the next set of waves causing breakdown.

When using asymmetrical electrode systems, preliminary tests shall be conducted to determine the polarity which yields the lower breakdown voltage. If significant differences are obtained, the polarity giving the lower test results should be used.

### 10.2 Proof tests

One set of three impulses of specified proof voltage (virtual value) shall be applied to the test specimen in accordance with Clause 11 of IEC 60243-1:2013. When necessary for calibration

purposes, up to three impulses with peak voltages not exceeding 80 % of the proof voltage may be applied prior to the application of the proof voltage waves.

## 11 Criterion of breakdown

Clause 11 of IEC 60243-1:2013 is applicable.

## 12 Number of tests

Clause 12 of IEC 60243-1:2013 is applicable.

## 13 Report

Unless otherwise specified, the report shall include the following:

- a) a complete identification of the material tested, a description of the test specimens and the method of their preparation;
  - b) the polarity of the impulse waves;
  - c) the median (central value) of the electric strengths in kV/mm and/or of the breakdown voltages in kV (not that used for proof testing);
  - d) the thickness of each test specimen (see 5.4 of IEC 60243-1:2013);
  - e) the surrounding medium during the test and its properties;
  - f) the electrode system with polarity of electrodes when they are dissimilar;
  - g) the individual values of electric strength in kV/mm and/or breakdown voltage in kV (not that used for proof testing);
  - h) the temperature, pressure and humidity during tests in air or other gas, or the temperature of the surrounding medium when this is a liquid;
  - i) the conditioning treatment before test;
  - j) the initial nominal peak-voltage level for each test specimen;
  - k) an indication of the type and position (for example, at the electrode edge) of breakdown on the test specimen, and which impulse of the last set of three impulses resulted in breakdown for each test specimen;
  - l) the position on the voltage wave (wave-front, peak, or wave-tail) of breakdown for each test specimen.
-