




**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST TBR 006 E1:2004](#)

<https://standards.iteh.ai/catalog/standards/sist/a3e5a5ee-594d-48ec-81c5-d14dc722a652/sist-tbr-006-e1-2004>

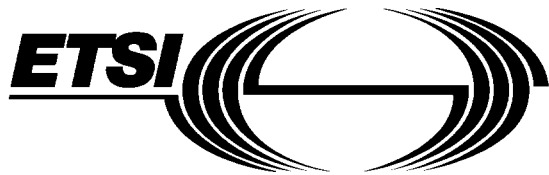

**T**ECHNICAL  
**B**ASIS for  
**R**EGULATION

**TBR 6**

December 1993

Source: ETSI TC-RES

Reference: DTBR/RES-03-09

ICS: 33.060

**Key words:** DECT, test specification, radio

**iTeh STANDARD PREVIEW**  
**Radio Equipment and Systems (RES)**  
**(standards.iteh.ai)**  
**Digital European Cordless Telecommunications (DECT)**  
**General terminal attachment requirements**

SIST TBR 006 E1:2004  
General Specification for Terminal Attachment Requirements  
d14dc722a652/sist-tbr-006-e1-2004

**ETSI**

European Telecommunications Standards Institute

**ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE

**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

**X.400:** c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

**Copyright Notification:** No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1993. All rights reserved.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST TBR 006 E1:2004](#)

<https://standards.iteh.ai/catalog/standards/sist/a3e5a5ee-594d-48ec-81c5-d14dc722a652/sist-tbr-006-e1-2004>



	5.6.1.1	Calibration of the test fixture for the measurement of transmitter characteristics .....	27
	5.6.1.2	Calibration of the test fixture for the measurement of receiver characteristics .....	28
	5.6.1.3	Mode of use .....	28
	5.6.2	Equipment with a temporary or internal permanent antenna connector .....	28
	5.6.2.1	Equipment with a temporary antenna connector .....	29
5.7		Indoor test site .....	29
	5.7.1	Description .....	29
	5.7.2	Test for parasitic reflections .....	30
	5.7.3	Calibration and mode of use .....	30
5.8		Lower Tester (LT) .....	30
	5.8.1	Description .....	30
	5.8.2	Connections between the EUT and the LT .....	31
	5.8.3	Functions and abilities .....	31
	5.8.4	Signal generation uncertainty .....	32
	5.8.4.1	Modulated DECT-like Carrier .....	32
	5.8.4.2	CW interferers .....	32
	5.8.4.3	DECT RF Signal .....	32
	5.8.4.4	Test modulation signals .....	32
	5.8.5	Measurement uncertainty .....	33
	5.8.5.1	RF measurements .....	33
5.9		Upper Tester (UT) .....	33
	5.9.1	Description of the UT .....	33
	5.9.2	The test standby mode .....	33
	5.9.3	Test messages .....	33
5.10		Description of the lower tester FT and PT .....	34
5.11		General test methods .....	34
	5.11.1	General .....	34
	5.11.2	Sampling the RF signal .....	34
	5.11.2.1	Introduction .....	34
	5.11.2.2	Sampling method .....	34
	5.11.3	Determining the reference position .....	35
	5.11.3.1	Case 1: EUTs that cannot transmit .....	35
	5.11.3.2	Case 2: EUTs that can transmit .....	35
5.12		Test set-up .....	35
	5.12.1	Test set-up 1 .....	36
	5.12.2	Test set-up 2 .....	36
	5.12.3	Test set-up 3 .....	36
	5.12.4	Test set-up 4 .....	37
	5.12.5	Test set-up 5 .....	37
5.13		Test arrangements for intermodulation measurements .....	38
	5.13.1	PT to PT arrangement .....	38
5.13.2		FT to FT arrangement .....	38
5.13.3		FT to PT arrangement .....	39
6		Test conditions, power sources and ambient temperatures .....	39
	6.1	General .....	39
	6.2	Nominal test conditions .....	40
	6.3	Extreme test conditions .....	40
	6.4	Test power source - general requirements .....	41
	6.5	Nominal test power source .....	41
	6.5.1	Mains voltage .....	41
	6.5.2	Regulated lead acid battery power sources .....	42
	6.5.3	Nickel cadmium battery .....	42
	6.5.4	Other power sources .....	42
	6.6	Extreme test power source .....	42
	6.6.1	Mains voltage .....	42
	6.6.2	Regulated lead acid battery power sources .....	42
	6.6.3	Nickel cadmium battery .....	42

	6.6.4	Other power sources.....	42
6.7		Testing of host connected equipment and plug-in cards.....	42
	6.7.1	Alternative A: composite equipment.....	42
	6.7.2	Alternative B: use of a test jig and three hosts.....	43
7		Accuracy and stability of RF carriers.....	43
	7.1	Definition.....	43
	7.2	Test environment.....	43
	7.3	Method of measurement.....	43
	7.4	Verdict criteria when the EUT is a RFP.....	44
	7.5	Verdict criteria when the EUT is a PP.....	44
	7.5.1	Case 1: When the measurement is made during the first 1 s of the EUT going into a transmit mode from a non-transmitting mode.....	44
	7.5.2	Case 2: When the measurement is made at any other time.....	44
8		Accuracy and stability of timing parameters.....	45
	8.1	Slot structure definitions.....	45
	8.2	Definition of the position of p0.....	45
	8.3	Measurement of packet timing jitter.....	46
	8.3.1	Test environment.....	46
	8.3.2	Method of measurement.....	46
	8.3.3	Verdict criteria.....	46
	8.4	Measurement of the reference timing accuracy of a RFP.....	46
	8.4.1	Test environment.....	46
	8.4.2	Method of measurement.....	47
	8.4.3	Verdict criteria.....	47
9		Transmission burst.....	47
	9.1	Definitions.....	47
	9.1.1	Physical packets.....	47
	9.1.2	Transmitted power.....	47
	9.1.3	Normal Transmitted Power (NTP).....	47
	9.1.4	Transmitter attack time.....	48
	9.1.5	Transmitter release time.....	48
	9.1.6	Minimum power.....	48
	9.1.7	Maximum power.....	48
	9.1.8	Maintenance of transmission after packet end.....	48
	9.1.9	Transmitter idle power output.....	48
	9.2	Test environment.....	48
	9.3	Method of measurement.....	48
	9.4	Verdict criteria.....	49
10		Transmitted power.....	49
	10.1	Definitions.....	49
	10.1.1	PP and RFP with an integral antenna.....	49
	10.1.2	PP and RFP with external connections for all antennas.....	49
	10.1.3	PP and RFP with both integral and external antennas.....	49
	10.2	PP and RFP with an integral antenna.....	50
	10.2.1	Test environment.....	50
	10.2.2	Method of measurement.....	50
	10.2.3	Verdict criteria for all EUTs.....	51
	10.3	PP and RFP with external antenna connection(s).....	51
	10.3.1	Test environment.....	51
	10.3.2	Method of measurement.....	51
	10.3.3	Verdict criteria for all EUTs.....	51
11		RF carrier modulation.....	51
	11.1	Test environment.....	51
	11.2	Method of measurement, Parts 1 and 2.....	52
	11.2.1	Part 1.....	52

11.2.2	Part 2.....	52
11.3	Method of measurement, Parts 3 and 4.....	52
11.3.1	Part 3.....	52
11.3.2	Part 4.....	53
11.4	Verdict criteria for part 1.....	53
11.5	Verdict criteria for part 2.....	53
11.6	Verdict criteria for part 3.....	53
11.7	Verdict criteria for part 4.....	53
12	Unwanted RF power radiation.....	55
12.1	General test conditions.....	55
12.2	Emissions due to modulation.....	55
12.2.1	Definition.....	55
12.2.2	Test environment.....	55
12.2.3	Method of measurement.....	55
12.2.4	Verdict criteria.....	56
12.3	Emissions due to transmitter transients.....	56
12.3.1	Definition.....	56
12.3.2	Test environment.....	56
12.3.3	Method of measurement.....	57
12.3.4	Verdict criteria.....	57
12.4	Emissions due to intermodulation.....	58
12.4.1	Definition.....	58
12.4.2	Test environment.....	58
12.4.3	Method of measurement.....	58
12.4.4	Verdict criteria.....	59
12.5	Spurious emissions when allocated a transmit channel.....	59
12.5.1	Definition.....	59
12.5.2	Radiated emissions.....	59
12.5.2.1	Test environment.....	59
12.5.2.2	Method of measurement.....	59
12.5.2.3	Verdict criteria.....	60
12.5.3	Conducted spurious emissions.....	60
12.5.3.1	Test environment.....	60
12.5.3.2	Method of measurement.....	61
12.5.3.3	Verdict criteria.....	61
13	Radio receiver testing.....	61
13.1	Radio receiver sensitivity.....	61
13.1.1	Definition.....	61
13.1.2	Test environment.....	61
13.1.3	Method of measurement.....	61
13.1.4	Verdict criteria.....	62
13.2	Radio receiver reference bit error ratio.....	62
13.2.1	Definition.....	62
13.2.2	Test environment.....	62
13.2.3	Method of measurement.....	62
13.2.4	Verdict criteria.....	62
13.3	Radio receiver interference performance.....	62
13.3.1	Definition.....	62
13.3.2	Test environment.....	63
13.3.3	Method of measurement.....	63
13.3.4	Verdict criteria.....	63
13.4	Radio receiver blocking case 1: owing to signals occurring at the same time but on other frequencies.....	63
13.4.1	Definition.....	64
13.4.2	Test environment.....	64
13.4.3	Method of measurement.....	64
13.4.4	Verdict criteria.....	65
13.5	Radio receiver blocking case 2: owing to signals occurring at a different time.....	65



13.5.1	Definition .....	65
13.5.2	Test environment.....	65
13.5.3	Method of measurement .....	65
13.5.4	Verdict criteria .....	66
13.6	Receiver intermodulation performance .....	66
13.6.1	Definition .....	66
13.6.2	Test environment.....	66
13.6.3	Method of measurement .....	66
13.6.4	Verdict criteria .....	67
13.7	Spurious emissions when the radio endpoint has no allocated transmit channel.....	67
13.7.1	Definition .....	67
13.7.2	Test environment.....	67
13.7.3	Method of measurement .....	67
13.7.4	Verdict criteria (outside the DECT band) .....	68
13.7.5	Verdict criteria (inside the DECT band) .....	68
14	Synchronisation port (FT only).....	68
14.1	Description .....	68
14.2	Test environment.....	68
14.3	FT as the master .....	68
14.3.1	Method of measurement .....	68
14.3.2	Verdict criteria .....	69
14.4	FT as the slave .....	69
14.4.1	Method of measurement .....	69
14.4.2	Verdict criteria: Class 1 FTs.....	70
14.4.3	Verdict criteria: Class 2 FTs.....	70
15	EMC .....	70
16	Equipment identity testing.....	70
16.1	PP .....	70
16.2	FP .....	70
17	Efficient use of the radio spectrum.....	71
17.1	Channel Selection.....	71
17.2	Channel confirmation .....	71
17.2.1	For the PT .....	71
17.2.2	For the FT .....	71
17.3	Channel Release .....	71
17.4	General.....	71
18	Supplement to test procedures in ETS 300 175-3.....	72
18.1	A field loopback .....	72
18.1.1	PP under test.....	72
18.1.2	FP under test.....	72
18.1.3	General rule.....	72
18.2	Connectionless service only equipment with transmitters .....	72
18.3	Speed of test message execution.....	72
18.4	Allow initial dummy bearer .....	72
18.5	Editorial.....	72
Annex A (informative):	Report references.....	73
Annex B (normative):	Procedures for test fixture calibration and for measurement of radiated spurious emissions.....	74
B.1	Calibration of test fixture for receiver measurements.....	74
B.1.1	Method of measurement.....	74
B.2	Radiated measurements .....	75

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)

SIST TBR 006 E1:2004

<https://standards.iteh.ai/catalog/standards/sist/a3e5a5ee-594d-48ec-81c5-d14dc722a652/sist-tbr-006-e1-2004>

B.2.1	General .....	75
B.2.2	Radiated spurious emissions .....	76
B.2.2.1	Definition.....	76
B.2.2.2	Method of measurement .....	76
B.2.3	Cabinet radiation .....	78
B.2.3.1	Definition.....	78
B.2.3.2	Method of measurement .....	78
Annex C (informative):	Essential requirement justification .....	79
Annex D (normative):	Test support profile .....	80
D.1	Introduction.....	80
D.2	Standardised symbols for the status column .....	80
D.3	Capabilities of PP (EUT) under test.....	81
D.3.1	Services .....	81
D.3.2	Messages.....	81
D.3.3	Message parameters .....	84
D.3.4	Procedure support.....	87
D.3.5	CSF multiplexing functions.....	88
D.3.6	Timer and counter support .....	89
D.4	Capabilities of FP (EUT) under test.....	90
D.4.1	Services .....	90
D.4.2	Messages.....	90
D.4.3	Message parameters .....	93
D.4.4	Procedure support.....	95
D.4.5	CSF multiplexing functions.....	96
D.4.6	Timer and counter support .....	98
History .....	<a href="https://standards.iteh.ai/catalog/standards/sist/a3e5a5ee-594d-48ec-81c5-d14dc722a652/sist-tbr-006-e1-2004">https://standards.iteh.ai/catalog/standards/sist/a3e5a5ee-594d-48ec-81c5-d14dc722a652/sist-tbr-006-e1-2004</a>	99

iTech STANDARD PREVIEW

(standards.iteh.ai)

SIST TBR 006 E1:2004

## Foreword

This Technical Basis for Regulation (TBR) has been produced by the Radio Equipment and Systems (RES) Technical Committee of the European Telecommunications Standards Institute (ETSI) and was adopted after having passed through the ETSI standards approval procedure.

This TBR covers the general attachment requirements for terminal equipment for the Digital European Cordless Telecommunications (DECT) common interface.

This TBR contains the procedures and requirements for the type examination of Digital European Cordless Telecommunications (DECT) equipment.

DECT equipment capable of being physically attached to the public network will also meet the appropriate attachment requirements. Speech attachment requirements are covered in draft TBR 10.

This TBR is based on the DECT common interface ETS 300 175 [1] to [7] and I-ETS 300 176 [13].

Clause 18 of this TBR contains changes to text in ETS 300 175-3 [3] and should therefore be read in conjunction with this TBR. The ETS will be amended in due course to reflect these changes, following the normal ETSI amendment procedure.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST TBR 006 E1:2004](#)

<https://standards.iteh.ai/catalog/standards/sist/a3e5a5ee-594d-48ec-81c5-d14dc722a652/sist-tbr-006-e1-2004>

Blank page

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST TBR 006 E1:2004](https://standards.iteh.ai/catalog/standards/sist/a3e5a5ee-594d-48ec-81c5-d14dc722a652/sist-tbr-006-e1-2004)

<https://standards.iteh.ai/catalog/standards/sist/a3e5a5ee-594d-48ec-81c5-d14dc722a652/sist-tbr-006-e1-2004>

## 1 Scope

This TBR specifies the technical characteristics to be provided by terminal equipment which is capable of connection to a public telecommunications network and which uses DECT cordless communications for network access. The cordless transmissions for such terminal equipment operate within the frequency band 1 880 - 1 900 MHz.

The objective of this TBR is to ensure that no disturbance occurs to the public network, and to ensure interworking between network and terminal so that calls can be routed successfully through the network, but without any guarantee of terminal to terminal operation.

The requirements in this TBR applies together with the attachment requirements for the appropriate public network (see NOTE 2) and the requirements of any other relevant TBR. It does not add to or reduce the attachment requirements unless there is a particular effect on the network which is unique to DECT.

A DECT terminal equipment comprises two elements, referred to as a Fixed Part (FP) and a Portable Part (PP). This TBR is structured to allow type approval of the FP and PP as separate items.

Because of the need for effective use of the radio frequency spectrum, the air interface characteristics between FP and PP shall be tested.

For each requirement, a test is given, including measurement methods. Requirements apply at the public network interface of the terminal equipment, which may be stimulated to perform the tests by additional equipment if necessary.

Terminal equipment may be subject to additional or alternative requirements in other CTRs depending on its functionality, in particular if it supports a service which is considered a justified case for regulation of terminal equipment interworking via the public telecommunications network.

NOTE 1: This TBR is based on the radio and protocol provisions of I-ETS 300 176 [13].

NOTE 2: TBR for basic ISDN, TBR for primary rate ISDN, or national regulations (implementing ETS 300 001) for PSTN. Interconnection of a DECT terminal to a GSM network is still under study; in due course, the scope statement may need amending to reflect this point.

## 2 Normative references

This Technical Basis for Regulation (TBR) incorporates, by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to, or revisions of any of these publications apply to this TBR only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 175-1 (1992): "Digital European Cordless Telecommunications Common Interface Part 1: Overview".
- [2] ETS 300 175-2 (1992): "Digital European Cordless Telecommunications Common Interface Part 2: Physical layer".
- [3] ETS 300 175-3 (1992): "Digital European Cordless Telecommunications Common Interface Part 3: Medium access control layer".
- [4] ETS 300 175-4 (1992): "Digital European Cordless Telecommunications Common Interface Part 4: Data link control layer".
- [5] ETS 300 175-5 (1992): "Digital European Cordless Telecommunications Common Interface Part 5: Network layer".
- [6] ETS 300 175-6 (1992): "Digital European Cordless Telecommunications Common Interface Part 6: Identities and addressing".
- [7] ETS 300 175-7 (1992): "Digital European Cordless Telecommunications Common Interface Part 7: Security features".
- [8] ISO Publication ISO/IEC 9646-1 (1991): "Conformance testing methodology and framework, Part 1: General concepts".
- [9] CCITT Recommendation V.11 (1988): "Electrical characteristics for balanced double-current interchange circuits for general use with integrated circuit equipment in the field of data communications".  
<https://standards.iteh.ai/catalog/standards/sist/a3e5a5ee-594d-48ec-81c5-d14dc122a652/sist-tbr-006-e1-2004>
- [10] CCITT Recommendation O.153 (1988): "Characteristics of distortion and error-rate measuring apparatus for data transmission".
- [11] 91/263/EEC: "Council Directive of 29 April 1991 on the approximation of the laws of the Member States concerning telecommunications terminal equipment, including the mutual recognition of their conformity". (Terminal Directive).
- [12] EN 55022: "Limits and methods of measurements of radio interferers characteristics of information technology equipment".
- [13] I-ETS 300 176 (1992): "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT) Approval test specification".

### 3 Definitions and abbreviations

#### 3.1 Definitions

For the purposes of this TBR, the following definitions apply:

**Antenna diversity:** antenna diversity implies that the RFP for each bearer independently can select different antenna properties such as gain, polarisation, coverage patterns, and other features that may effect the practical coverage. A typical example is space diversity, provided by two vertically polarized antennas separated by 10 - 20 cm.

**Bearer handover:** the internal handover process provided by the MAC layer, whereby one MAC connection can modify its underlying bearers while maintaining the service provided to the DLC layer.

NOTE 1: Bearer handover is slot based.

**Cell:** the domain served by a single antenna system (including a leaky feeder) of one fixed part.

NOTE 2: A cell may include more than one source of radiated RF energy (i.e. more than one radio end point).

**Central Control Fixed Part (CCFP):** a physical grouping that contains the central elements of a fixed part. A fixed part shall contain a maximum of one CCFP.

NOTE 3: A CCFP controls one or more RFPs.

**Conducted measurements:** measurements which are made using a direct connection to the equipment under test.

**DECT-like carrier:** a modulated RF DECT carrier used for interference testing which conforms to the requirements in ETS 300 175-2 [2] in terms of frequency and timing and uses a pseudo-random sequence for modulation.

**Double slot (slot):** one 12th of a TDMA frame which is used to support one high capacity physical channel.

**Duplex bearer:** the use of two simplex bearers operating in opposite directions on two physical channels. These pairs of channels always use the same RF carrier and always use evenly spaced slots (i.e. separated by 0,5 TDMA frame).

**Equipment Under Test (EUT):** the equipment submitted to the test laboratory for type examination.

**Fixed Part (DECT fixed part) (FP):** a physical grouping that contains all of the elements in the DECT network between the local network and the DECT air interface.

NOTE 4: A DECT fixed part contains the logical elements of at least one fixed radio termination, plus additional implementation specific elements.

**Fixed radio Termination (FT):** a logical group of functions that contains all of the DECT processes and procedures on the fixed side of the DECT air interface.

NOTE 5: A fixed radio termination only includes elements that are defined in the DECT CI standard. This includes radio transmission elements (layer 1) together with a selection of layer 2 and layer 3 elements.

**Full slot (slot):** one 24th of a TDMA frame which is used to support one physical channel.

**Half slot:** one 48th of a TDMA frame which is used to support one physical channel.