

INTERNATIONAL STANDARD

ISO
4288

Second edition
1996-08-01

Geometrical Product Specifications (GPS) — Surface texture: Profile method — Rules and procedures for the assessment of surface texture

iTeh STANDARD PREVIEW
(standards.iteh.ai)

*Spécification géométrique des produits (GPS) — État de surface: Méthode
du profil — Règles et procédures pour l'évaluation de l'état de surface*
<https://standards.iteh.ai/catalog/standards/sist/6b5690c5-d1e2-45b0-83af-3aebeae261e2/iso-4288-1996>

INTERNATIONAL

ISO



Reference Number
ISO 4288:1996(E)

Contents

	Page
1 Scope	1
2 Normative references	1
3 Definitions	1
4 Parameter estimation	2
4.1 Parameters defined over the sampling length	2
4.2 Parameters defined over the evaluation length	2
4.3 Curves and related parameters	2
4.4 Default evaluation lengths	2
5 Rules for comparison of the measured values with the tolerance limits	2
5.1 Areas on the feature to be inspected	2
5.2 The 16 % rule	2
5.3 The max.-rule	3
5.4 Uncertainty of measurement	3
6 Parameter evaluation	3
6.1 General	3
6.2 Roughness profile parameters	3
7 Rules and procedures for inspection using stylus instruments ..	4
7.1 Basic rules for the determination of cut-off wavelength for the measurement of roughness profile parameters	4
7.2 Measurement of roughness profile parameters	4

© ISO 1996

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Annexes

A	Simplified procedure roughness inspection	6
B	Relation to GPS matrix model	7
C	Bibliography	8

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 4288:1996

<https://standards.iteh.ai/catalog/standards/sist/6b5030e5-d1f2-45b0-83a1-3aebeae261e2/iso-4288-1996>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 4288 was prepared jointly by Technical Committees ISO/TC 57, *Metrology and properties of surfaces*, Subcommittee SC 1, *Geometrical parameters — Instruments and procedures for measurement of surface roughness and waviness*, ISO/TC 3, *Limits and fits* and ISO/TC 10, *Technical drawings, product definition and related documentation*, Subcommittee SC 5, *Dimensioning and tolerancing*.

This second edition cancels and replaces the first edition (ISO 4288:1985) which has been technically revised.

It differs from the previous edition in that filter cut-off values are chosen based on the workpiece texture rather than the drawing indication. Furthermore, this International Standard includes rules for the determination of parameters other than R_a and R_z . This second edition covers roughness profile parameters, primary profile parameters and comparison of measured motif parameter values with given specification.

It is envisaged that an amendment will be prepared covering M-system waviness profile parameters, for which there are currently no standardized rules.

Annexes A, B and C of this International Standard are for information only.

Introduction

This International Standard is a geometrical product specification (GPS) standard and is to be regarded as a general GSP standard (see ISO/TR 14638). It influences the chain links 3 and 4 of the chains of standards for roughness profile and primary profile.

For more detailed information of the relation of this International Standard to other standards and the GPS matrix model see annex B.

The discrimination between periodic and non-periodic profiles is subjective and left to the discretion of the user.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 4288:1996](https://standards.iteh.ai/catalog/standards/sist/6b5030e5-d1f2-45b0-83a1-3aebeae261e2/iso-4288-1996)

<https://standards.iteh.ai/catalog/standards/sist/6b5030e5-d1f2-45b0-83a1-3aebeae261e2/iso-4288-1996>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

This page intentionally left blank

ISO 4288:1996

<https://standards.iteh.ai/catalog/standards/sist/6b5030e5-d1f2-45b0-83a1-3aebeae261e2/iso-4288-1996>

Geometrical Product Specifications (GPS) — Surface texture: Profile method — Rules and procedures for the assessment of surface texture

1 Scope

This International Standard specifies the rules for comparison of the measured values with the tolerance limits for surface texture parameters defined in ISO 4287, ISO 12085, ISO 13565-2 and ISO 13565-3.

It also specifies the default rules for selection of cut-off wavelength, λ_c , for measuring roughness profile parameters according to ISO 4287 by using stylus instruments according to ISO 3274.

ISO 4287:1996, *Geometrical Product Specifications (GPS) — Surface texture: Profile method — Terms, definitions and parameters of surface texture*.

ISO 12085:1996, *Geometrical Product Specifications (GPS) — Surface texture: Profile method — Motif parameters*.

ISO 13565-1:1996, *Geometrical Product Specifications (GPS) — Surface texture: Profile method; surfaces having stratified functional properties — Part 1: Filtering and general measurement conditions*.

ISO 13565-2:1996, *Geometrical Product Specifications (GPS) — Surface texture: Profile method; surfaces having stratified functional properties — Part 2: Height characterization using the linear material ratio curve*.

ISO 13565-3:—¹⁾, *Geometrical Product Specifications (GPS) — Surface texture: Profile method; surfaces having stratified functional properties — Part 3: Height characterization using the material probability curve*.

ISO 14253-1:—¹⁾, *Geometrical Product Specifications (GPS) — Inspection by measurement of workpieces and measuring instruments — Part 1: Decision rules for proving conformance or non-conformance with specifications*.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 1302:1992, *Technical drawings — Method of indicating surface texture*.

ISO 3274:1996, *Geometrical Product Specifications (GPS) — Surface texture: Profile method — Nominal characteristics of contact (stylus) instruments*.

3 Definitions

For the purposes of this International Standard, the definitions given in ISO 3274, ISO 4287, ISO 12085, ISO 13565-2 and ISO 13565-3 apply.

¹⁾ To be published.

4 Parameter estimation

4.1 Parameters defined over the sampling length

4.1.1 Parameter estimate

An estimate of the parameter's value is calculated using the measured data from only one sampling length.

4.1.2. Average parameter estimate

An average parameter estimate is calculated by taking the arithmetic mean of the parameter estimates from all the individual sampling lengths.

When the standard number of five sampling lengths is used for roughness profile parameters, no suffix needs to be added to the symbol. For a parameter evaluated over a number of sampling lengths other than five, that number shall be added as a suffix to the parameter symbol (eg. R_{z1} , R_{z3}).

4.2 Parameters defined over the evaluation length

For parameters defined over the evaluation length (P_r , R_t and W_t), an estimate of a parameter's value is calculated by using measurement data from an evaluation length equal to the standardized number of sampling lengths.

4.3 Curves and related parameters

For curves and related parameters, an estimate of a parameter's value is calculated by using measurement data from one curve, which has been computed based on the evaluation length.

4.4 Default evaluation lengths

If not otherwise indicated on the drawing or in the technical product documentation, the evaluation length is as follows:

- R -parameters: the evaluation length is defined in clause 7;
- P -parameters: the evaluation length is equal to the length of the feature being measured;
- motif-parameters: the evaluation length is defined in clause 5 of ISO 12085:1996;
- parameters defined in ISO 13565-2 and ISO 13565-3: the evaluation length is defined in clause 7 of ISO 13565-1:1996.

5 Rules for comparison of the measured values with the tolerance limits

5.1 Areas on the feature to be inspected

The surface texture of the workpiece under inspection can appear homogeneous or be quite different over various areas. This can be seen by visual examination of the surface. In cases where the surface texture appears homogeneous, parameter values determined over the entire surface shall be used for comparison with the requirements specified on the drawings or in the technical product documentation.

If there are separate areas with obviously different surface texture, the parameter values which are determined on each area shall be used separately for comparison with the requirements specified on the drawings or in the technical product documentation.

For requirements specified by the upper limit of the parameter, those separate areas of the surface shall be used which appear to have the maximum parameter value.

5.2 The 16 %-rule

For requirements specified by the upper limit (see ISO 1302:1992, 6.2.3) of a parameter, the surface is considered acceptable if not more than 16 % of all the measured values (see notes 1 and 2) of the selected parameter, based upon an evaluation length, exceed the value specified on the drawings or in the technical product documentation.

For requirements specified by the lower limit of the surface parameter, the surface is considered acceptable if not more than 16 % of all the measured values (see notes 1 and 2) of the selected parameter, based upon an evaluation length, are less than the value specified on the drawings or in the technical product documentation.

To designate the upper and the lower limits of the parameter, the symbol of the parameter shall be used without the "max." index.

NOTES

- 1 Annex A provides simplified practical guidance for comparing measured values with upper and lower limits.
- 2 In cases where the values of the roughness profile parameter of the surface being inspected follow a normal distribution, the determination of the upper limit as a limit which may be exceeded by 16 % of the measured values of the roughness profile parameter conforms with the limit determined by the value $\mu + \sigma$, where μ is the arithmetic mean value of the roughness profile parameter and σ is the standard deviation of the values. The greater the value of σ , the further from the specified limit (the upper value) the mean value of the roughness profile parameter needs to be. (See figure 1.)

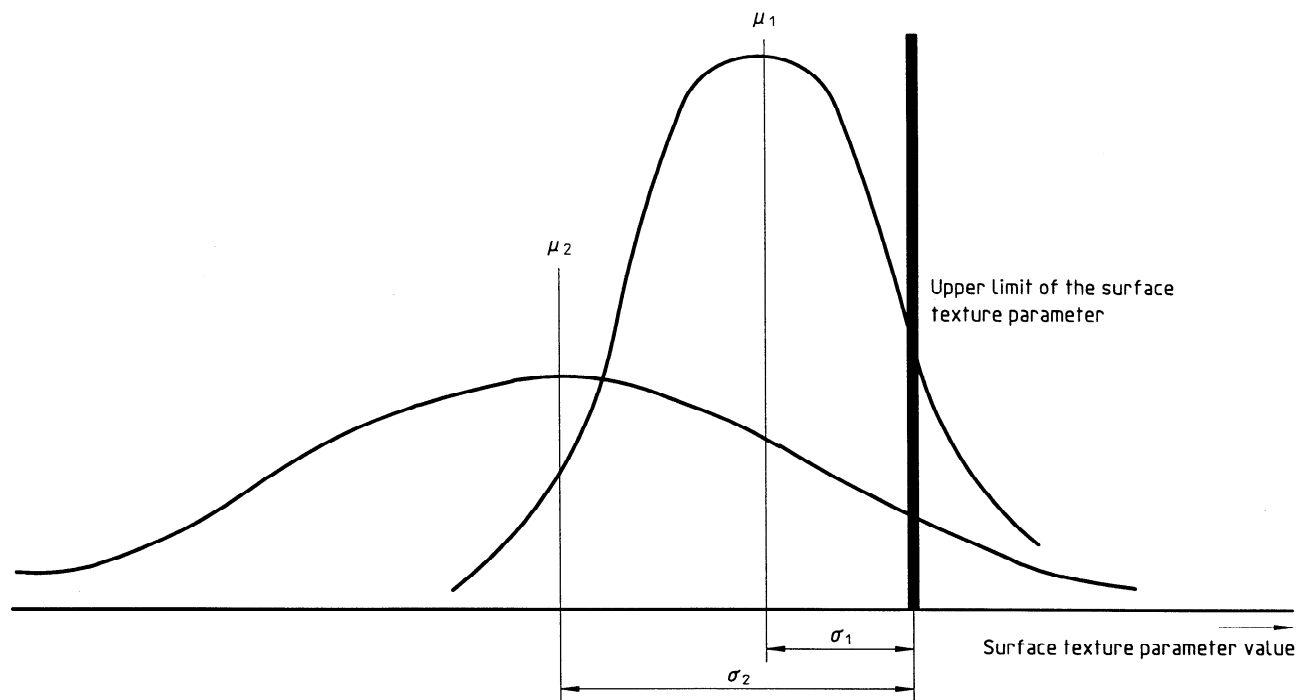


Figure 1

5.3 The max.-rule

For requirements specified by the maximum value (see ISO 1302:1992, 6.2.2) of the parameter during inspection, none of the measured values of the parameter over the entire surface under inspection shall exceed the value specified on the drawings or in the technical product documentation.

To designate the maximum permissible value of the parameter, the "max." index has to be added to the symbol of the parameter (for example $R_z1\text{max.}$).

5.4 Uncertainty of measurement

For proving conformance or non-conformance with specification, measured values of parameters shall be compared with the specified limiting values taking into account the uncertainty of measurement according to the rules given in ISO 14253-1. In case of comparing results of measurement with upper and lower limits, the uncertainty of measurement shall be estimated without taking into account the inhomogeneity in the surface which is already accounted for in the 16 % allowance.

6 Parameter evaluation

6.1 General

Surface texture parameters are not useful for the description of surface defects. Therefore, surface de-

fects, e.g. scratches and pores, shall not be considered during inspection of surface texture.

To decide whether or not a workpiece surface is in accordance with specification, a set of single values of the surface texture parameter, each determined from an evaluation length, shall be used.

The reliability of the decision as to whether or not the surface being inspected meets the specification, and the precision of the mean value obtained for the surface texture parameter of the same surface, depend on the number of sampling lengths within the evaluation lengths with which the single value of the surface texture parameter is obtained and also on the number of evaluation lengths, i.e. the number of measurements along the surface.

6.2 Roughness profile parameters

For R -parameters according to ISO 4287, if the evaluation length does not equal five sampling lengths, their upper and lower limits shall be recalculated and related to an evaluation length equal to five sampling lengths. In figure 1 each σ shown is equal to the individual σ_5 .

The relation of σ_n to σ_5 is given by the following equation:

$$\sigma_5 = \sigma_n \sqrt{n/5}$$

where n is the number (less than 5) of sampling lengths used.