



SLOVENSKI STANDARD

SIST ISO 12128:2002

01-julij-2002

Drсни ležaji - Luknje za mazanje, žlebovi in prekati - Mere, oblike, poimenovanje in uporaba na ležajnih pušah

Plain bearings -- Lubrication holes, grooves and pockets -- Dimensions, types, designation and their application to bearing bushes

iTeh STANDARD PREVIEW

Paliers lisses -- Trous, rainures et poches de graissage -- Dimensions, types, désignation et leurs applications dans les bagues

[SIST ISO 12128:2002](https://standards.iteh.ai/catalog/standards/sist/c2a1b1df-e8b3-40de-9d63-2585b47b8d06/sist-iso-12128-2002)

Ta slovenski standard je istoveten z: ISO 12128:1995

ICS:

21.100.10	Drсни ležaji	Plain bearings
21.260	Mazalni sistemi	Lubrication systems

SIST ISO 12128:2002

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 12128:2002

<https://standards.iteh.ai/catalog/standards/sist/c2a1b1df-e8b3-40de-9d63-2585b49b8d06/sist-iso-12128-2002>

INTERNATIONAL
STANDARD

ISO
12128

First edition
1995-04-01

**Plain bearings — Lubrication holes,
grooves and pockets — Dimensions, types,
designation and their application to
bearing bushes**
(standards.iteh.ai)

Paliers lisses — Trous, rainures et poches de graissage — Dimensions, types, désignation et leurs applications dans les bagues

<https://standards.iteh.ai/catalog/standards/sist/c2a1b1df-e8b3-40de-9d63-2585b49b8d06/sist-iso-12128-2002>

INTERNATIONAL

ISO



Reference number
ISO 12128:1995(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 12128 was prepared by Technical Committee ISO/TC 123, *Plain bearings*, Subcommittee SC 3, *Dimensions, tolerances and construction details*.

<https://standards.iteh.ai/catalog/standards/sist/c2a1b1df-e8b3-40de-9d63-2585b49b8d06/sist-iso-12128-2002>

© ISO 1995

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Plain bearings — Lubrication holes, grooves and pockets — Dimensions, types, designation and their application to bearing bushes

1 Scope

This International Standard specifies dimensions for lubrication holes, grooves and pockets for bearing bushes. These dimensions can be entered, for example on drawings, using the designation examples. Their use depends in particular on the specific operating conditions.

In addition, it enables the user to assign the different types of lubricant feed and distribution to plain bearing bushes made of copper alloys, thermosetting plastics, thermoplastics or of artificial carbon.

NOTE 1 Different types of lubricant feed and distribution for plain bearing bushes made of sintered metals have not been specified due to the fact that these bushes are soaked with lubricant. Plain bearing bushes made of artificial carbon are not lubricated with oil or grease.

[SIST ISO 12128:2002](https://standards.iteh.ai/catalog/standards/sist/c2a1b1df-e8b3-40de-9d63-2585b49b8d06/sist-iso-12128-2002)

2 Normative references

<https://standards.iteh.ai/catalog/standards/sist/c2a1b1df-e8b3-40de-9d63-2585b49b8d06/sist-iso-12128-2002>

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 2768-1:1989, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications*.

ISO 4379:1993, *Plain bearings — Copper alloy bushes*.

3 Dimensions, types and designation

The dimensions of the lubrication holes, grooves and pockets are related to the bearing wall thickness s . The given diameter d_1 shall only serve as an auxiliary dimension.

All dimensions are given in millimetres.

3.1 Lubrication holes

3.1.1 Dimensions and types

See figure 1 and table 1.

Lubrication holes may be provided in conjunction with lubrication grooves and pockets, or, if the requirement to be met by a lubrication point is less stringent, even without these.

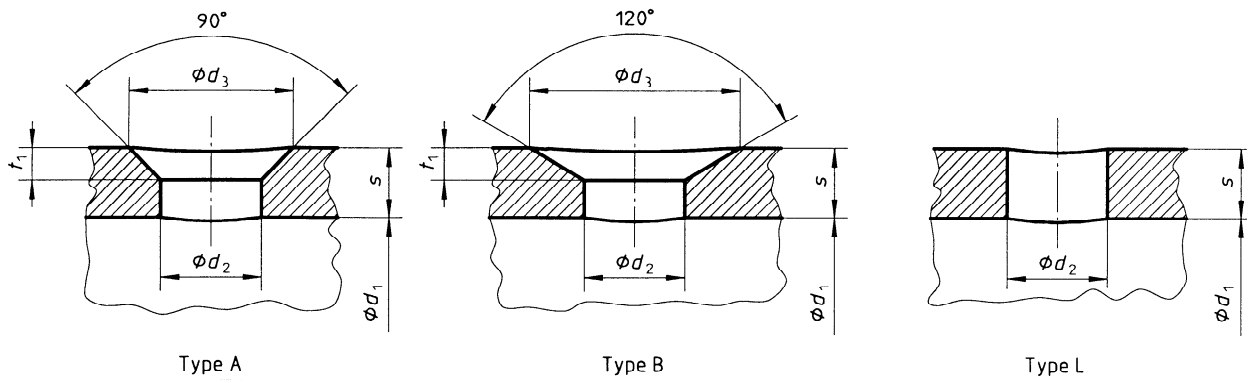


Figure 1 — Lubrication holes
(standards.iteh.ai)

SIST ISO 12128:2002

<https://standards.iteh.ai/catalog/standards/sist/c2a1b1df-e8b3-40de-9d63-2585b49b8d06/sist-iso-12128-2002>

Table 1 — Dimensions of the lubrication holes

$d_2 \approx$		2,5	3	4	5	6	8	10	12
$t_1 \approx$		1	1,5	2	2,5	3	4	5	6
$d_3 \approx$	Type A	4,5	6	8	10	12	16	20	24
	Type B	6	8,2	10,8	13,6	16,2	21,8	27,2	32,6
s	over	—	2	2,5	3	4	5	7,5	10
	up to and incl.	2	2,5	3	4	5	7,5	10	—
d_1	nominal	$d_1 \leq 30$		$30 < d_1 \leq 100$			$d_1 > 100$		

3.1.2 Designation

Designation of a lubrication hole, for example of type A with bore diameter $d_2 = 3$ mm:

Lubrication hole ISO 12128 - A3

3.2 Lubrication grooves

3.2.1 Dimensions and types

See figures 2 and 3 and tables 2 and 3.

Lubrication grooves are mainly provided on plain bearings. Types C, D and E are also used in conjunction with type H (circumferential groove), predominantly on plain bearings made of non-ferrous metal, steel, cast iron or plastics, types F and G predominantly on plain bearings made from artificial carbon.

Type J is a narrow blended groove principally for use with grease lubrication. In order to facilitate machining and avoid burrs, all sharp corners may have a small break edge or radius.

NOTE 2 In order to facilitate manufacture, the dimension of the bearing thickness remaining at the base of the groove may be specified on the drawing as the control dimension.

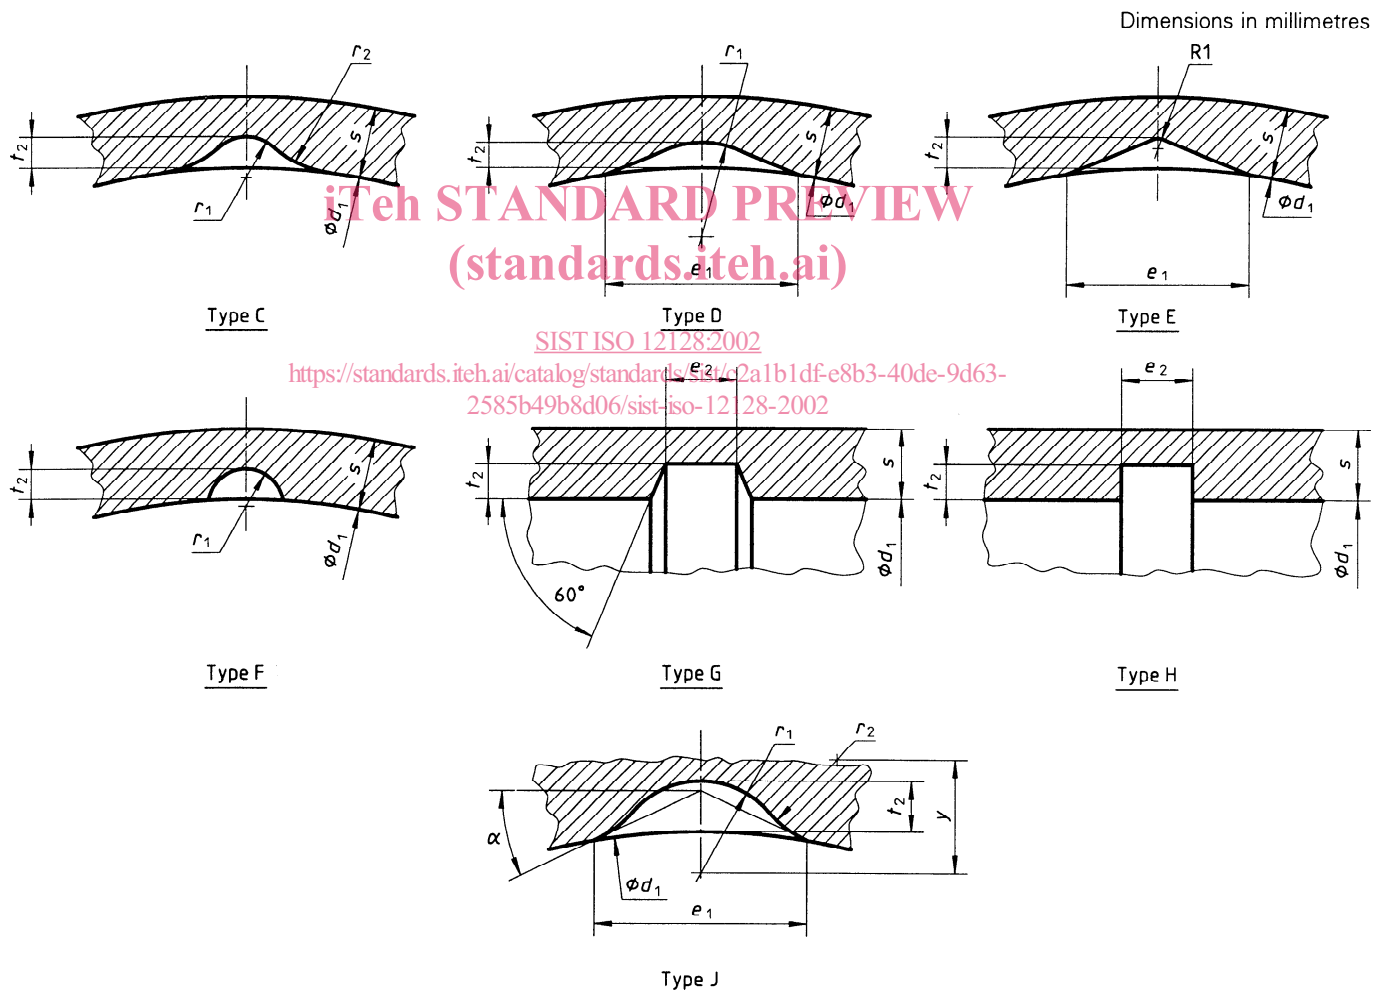


Figure 2 — Lubrication grooves

Table 2 — Dimensions of lubrication grooves

t_2 $+0,2$ 0	e_1 \approx		e_2 \approx		r_1 \approx				r_2 \approx		y \approx	α° \approx	s		d_1	
	Type	Type	Type	Type	Type	Type	Type	Type	Type	Type	Type	Type	over	up to and incl.	Type	Type
C to J	D, E	J	G	H	C	D	F	J	C	J	J	J			C to H	J
0,4	3	3	1,2	3	1,5	1,5	1	1	1,5	1	1,5	28	—	1	$d_1 \leq 30$	16
0,6	4	4	1,6	3	1,5	1,5	1	1,5	2	1,5	2,1	25	1	1,5		20
0,8	5	5	1,8	3	1,5	2,5	1	1,5	3	1,5	2,2	25	1,5	2		30
1	8	6	2	4	2	4	1,5	2	4,5	2	2,8	22	2	2,5		40
1,2	10,5	6	2,5	5	2,5	6	2	2	6	2	2,6	22	2,5	3	$d_1 \leq 100$	40
1,6	14	7	3,5	6	3	8	3	2,5	9	2,5	3	20	3	4		50
2	19	8	4,5	8	4	12	4	2,5	12	2,5	2,6	20	4	5		60
2,5	28	8	7,5	10	5	20	5	3	15	3	2,8	20	5	7,5	$d_1 > 100$	70
3,2	38	—	11	12	7	28	7	—	21	—	—	—	7,5	10		—
4	49	—	14	15	9	35	9	—	27	—	—	—	10	—		—

(standards.iteh.ai)

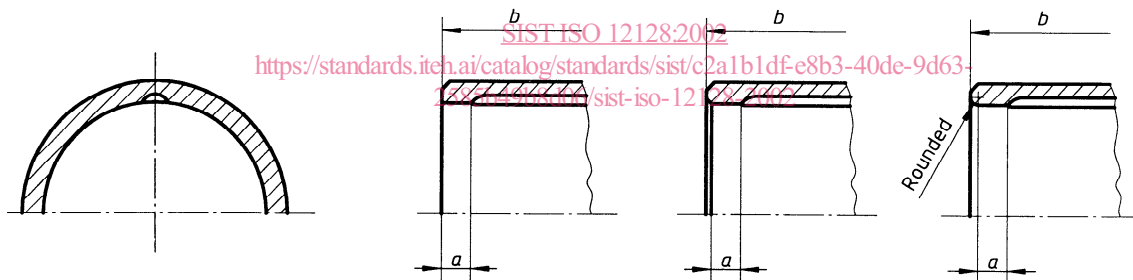


Figure 3 — Lubrication grooves with closed ends

Table 3 — Dimensions for distance a

b nom.	$15 \leq b \leq 30$	$30 < b \leq 60$	$60 < b \leq 100$	$b > 100$
a	3	4	6	10

3.2.2 Designation

Designation of a lubrication groove, for example of type D with groove depth $t_2 = 0,8$ mm:

Lubrication groove ISO 12128 - D0,8

3.3 Lubrication pockets

3.3.1 Dimensions and types

See figure 4 and table 4.

Lubrication pockets shall in general be provided in cases where larger lubrication spaces are required. Type K shall predominantly be used for plain slideways with a to-and-fro movement in a straight line.

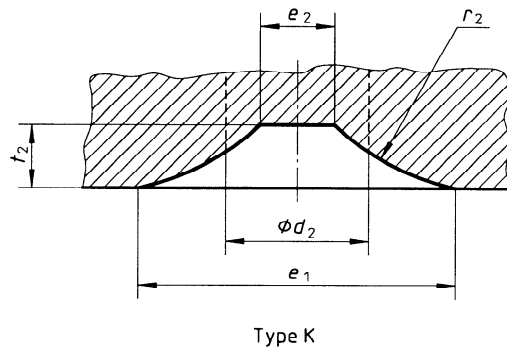


Figure 4 — Lubrication pocket

iTeh STANDARD PREVIEW

Table 4 — Dimensions of the lubrication pockets

t_2	d_2	e_1	e_2	r_2
1,6	6	8	1,8	6,5
2,5	8	15	2,8	14
4	10	24	4,5	20
6	12	35	6,3	30

3.3.2 Designation

Designation of a lubrication pocket type K, for example with pocket depth $t_2 = 2,5$ mm:

Lubrication pocket ISO 12128 - K2,5

3.4 Design

Permissible deviations without tolerance indications shall be in accordance with tolerance class "m" specified in ISO 2768-1. The edges shall be chamfered to 0,5 max. or rounded. Sharp-edged transitions to the sliding surface shall be avoided.

Lubrication holes, grooves and pockets should not be arranged in the stressed zone of the plain bearing. With the exception of plain bearings made from artificial carbon, lubrication grooves and pockets shall in general not be made over the whole length of the bearing. The shape of the groove or pocket runout shall be left to the manufacturer's discretion.