



**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST ISO 12141:2004

<https://standards.iteh.ai/catalog/standards/sist/f30fe96e-c9f6-43df-9078-dba5069e219e/sist-iso-12141-2004>

# INTERNATIONAL STANDARD

# ISO 12141

First edition  
2002-11-01

---

---

## Stationary source emissions — Determination of mass concentration of particulate matter (dust) at low concentrations — Manual gravimetric method

**iTeh STANDARD PREVIEW**  
*Émissions de sources fixes — Détermination d'une faible concentration en  
masse de matières particulaires (poussières) — Méthode gravimétrique  
manuelle*

[SIST ISO 12141:2004](https://standards.iteh.ai/catalog/standards/sist/f30fe96e-c9f6-43df-9078-dba5069e219e/sist-iso-12141-2004)

[https://standards.iteh.ai/catalog/standards/sist/f30fe96e-c9f6-43df-9078-  
dba5069e219e/sist-iso-12141-2004](https://standards.iteh.ai/catalog/standards/sist/f30fe96e-c9f6-43df-9078-dba5069e219e/sist-iso-12141-2004)



Reference number  
ISO 12141:2002(E)

© ISO 2002

**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ISO 12141:2004

<https://standards.iteh.ai/catalog/standards/sist/f30fe96e-c9f6-43df-9078-dba5069e219e/sist-iso-12141-2004>

© ISO 2002

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.ch](mailto:copyright@iso.ch)  
Web [www.iso.ch](http://www.iso.ch)

Printed in Switzerland

**Contents**

Page

1	Scope .....	1
2	Normative references .....	1
3	Terms and definitions .....	1
4	Principle .....	4
5	Sampling plane and sampling points .....	5
6	Apparatus and materials (see summary annex E) .....	7
7	Calculation of nozzle diameter to obtain weighable quantities of dust .....	13
8	Weighing procedure .....	14
9	Sampling procedure .....	16
10	Thermal behaviour of dusts .....	18
11	Validation of results .....	20
12	Calculations .....	21
13	Performance characteristics of the method .....	22
14	Test report .....	23

**ITeH STANDARD PREVIEW**  
(standards.iteh.ai)

**Annexes**

A	Requirements related to the working platform .....	25
B	Determination of flow direction with Pitot tubes .....	26
C	Determination of positions of sampling points in circular and rectangular ducts .....	27
D	Examples of suitable access ports for sampling equipment .....	31
E	Proven entry nozzle designs .....	33
F	Summary of apparatus requirements .....	35
G	Sampling volume, flowrate and duration .....	36
H	Examples of weighing bias .....	37
I	Precision data .....	39
	Bibliography .....	40

**ISO 12141:2002(E)****Foreword**

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 12141 was prepared by Technical Committee ISO/TC 146, *Air quality*, Subcommittee SC 1, *Stationary source emissions*.

Annexes A, C, E and F form a normative part of this International Standard. Annexes B, D, G, H and I of this International Standard are for information only.

**(standards.iteh.ai)**

SIST ISO 12141:2004

<https://standards.iteh.ai/catalog/standards/sist/f30fe96e-c9f6-43df-9078-dba5069e219e/sist-iso-12141-2004>

## Introduction

This method was developed from close liaison and cooperation between ISO/TC 146/SC 1/WG 11 and CEN/TC 264/WG 5, resulting in the preparation of this International Standard and the European Standard EN 13284-1. This International Standard is similar to EN 13284-1 with additional emphasis given on the use of high-volume sampling techniques for the measurement of dust at low concentrations. It also gives procedures for extending the range of measurement of ISO 9096:1992 to lower concentrations. As in ISO 9096:1992, a representative, integrated sample is extracted from the flue gas and particulate matter entrained in the gas sample is separated by a filter. The pre-weighed filter is subsequently dried and weighed. Any increase in the mass is attributed to the collection of particulate matter on the filter.

To meet the specifications of this International Standard, the particulate sample must be weighed to a specified level of accuracy. At low dust concentrations, this level of accuracy may be achieved by:

- a) exercising extreme care in weighing, as per procedures of this standard,
- b) extending the sampling time at conventional sampling rates, or
- c) sampling at higher rates for conventional sampling times (high-volume sampling).

This International Standard in addition differs from ISO 9096:1992 by requiring the measurement of the mass of filter blanks, specifying weighing procedures.

This method may be used for calibration of automated monitoring systems (AMSs) (see ISO 10155). If the waste gas contains unstable, reactive or semivolatile substances, the measurement will depend on the filtration temperature, and in-stack methods may be more applicable than out-stack methods for the calibration of automated monitoring systems.

[SIST ISO 12141:2004](https://standards.iteh.ai/catalog/standards/sist/f30fe96e-c9f6-43df-9078-dba5069e219e/sist-iso-12141-2004)

<https://standards.iteh.ai/catalog/standards/sist/f30fe96e-c9f6-43df-9078-dba5069e219e/sist-iso-12141-2004>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST ISO 12141:2004](#)

<https://standards.iteh.ai/catalog/standards/sist/f30fe96e-c9f6-43df-9078-dba5069e219e/sist-iso-12141-2004>



# Stationary source emissions — Determination of mass concentration of particulate matter (dust) at low concentrations — Manual gravimetric method

## 1 Scope

This International Standard describes a reference method for the measurement of low dust content in ducted gaseous streams at concentrations below  $50 \text{ mg/m}^3$  under standard conditions. This method has been validated with special emphasis on the region around  $5 \text{ mg/m}^3$ .

This International Standard has been developed and validated for gaseous streams emitted by waste incinerators. More generally, it may be applied to emissions from other stationary sources, and to higher concentrations.

If the gases contain unstable, reactive or semi-volatile substances, the measurement will depend on the sampling and filter treatment conditions.

## 2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 3966:1977, *Measurement of fluid flow in closed conduits — Velocity area method using Pitot static tubes*

ISO 5725 (all parts), *Accuracy (trueness and precision) of measurement methods and results*

ISO 9096:1992, *Stationary source emissions — Determination of concentration and mass flow rate of particulate material in gas-carrying ducts — Manual gravimetric method*

ISO 10780:1994, *Stationary source emissions — Measurement of velocity and volume flowrate of gas streams in ducts*

## 3 Terms and definitions

For the purposes of this International Standard, the following terms and definitions apply.

### 3.1

#### particulate matter

#### dust

particles, of any shape, structure or density, dispersed in the gas phase under the sampling conditions

**NOTE** In the method described, all the compounds that may be collected by filtration under specified conditions after sampling of the gas to be analysed, and which remain upstream of the filter and on the filter after drying under specified conditions, are considered to be dust (or particulate matter). However, for the purposes of some national standards, the definition of particulate matter may extend to condensibles or reaction products collected under specified conditions (e.g. temperatures lower than the flue gas temperature).

## ISO 12141:2002(E)

## 3.2

**filtration temperature**

temperature of the sampled gas immediately downstream of the filter

## 3.3

**in-stack filtration**

filtration in the duct with the filter in its filter holder placed immediately downstream of the sampling nozzle

## 3.4

**out-stack filtration**

filtration outside the duct with the filter in its heated filter holder placed downstream of the sampling nozzle and the suction tube (sampling probe)


## 3.5

**isokinetic sampling**

sampling at a flowrate such that the velocity and direction of the gas entering the sampling nozzle ( $v_n$ ) are the same as that of the gas in the duct at the sampling points,  $v_s$

See Figure 1.

NOTE The velocity ratio  $v_n/v_s$  expressed as a percentage characterizes the deviation from isokinetic sampling.

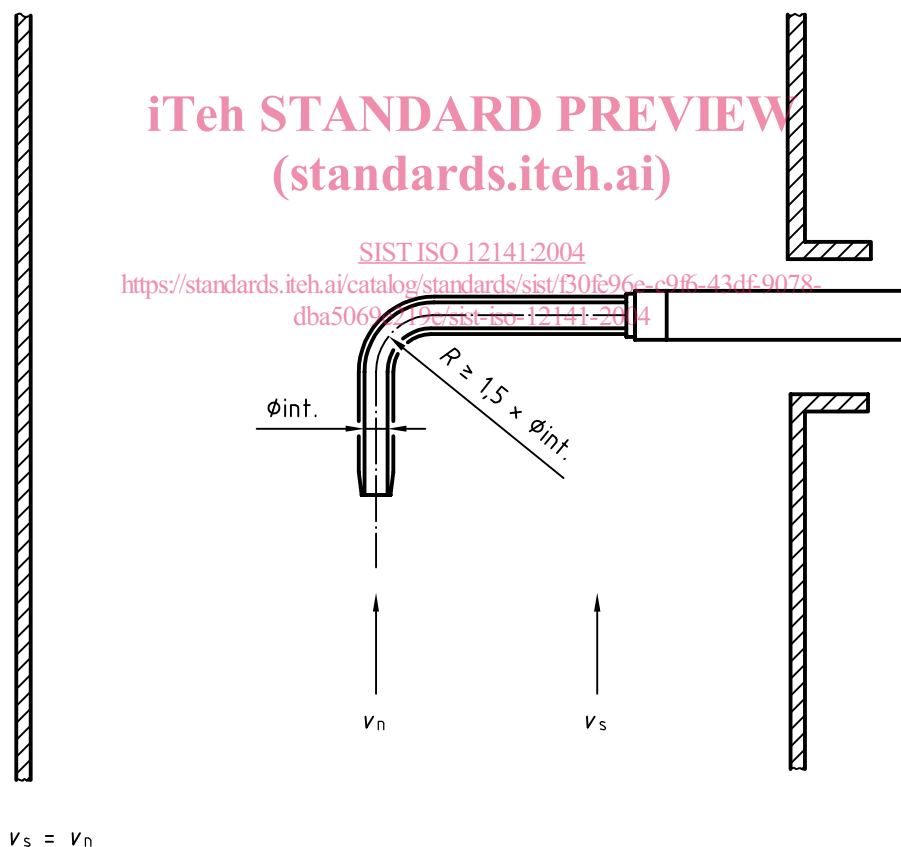

**Figure 1 — Isokinetic sampling in duct**

**3.6****hydraulic diameter** $d_h$ 

characteristic dimension of a duct cross-section

$$d_h = \frac{4 \times \text{area of sampling plane}}{\text{length of perimeter of sampling plane}} \quad (1)$$

**3.7****sampling plane**


plane normal to the centreline of the duct at the sampling position

See Figure 2.

**3.8****sampling line**

line in the sampling plane along which sampling points are located, bounded by the inner duct wall

See Figure 2.

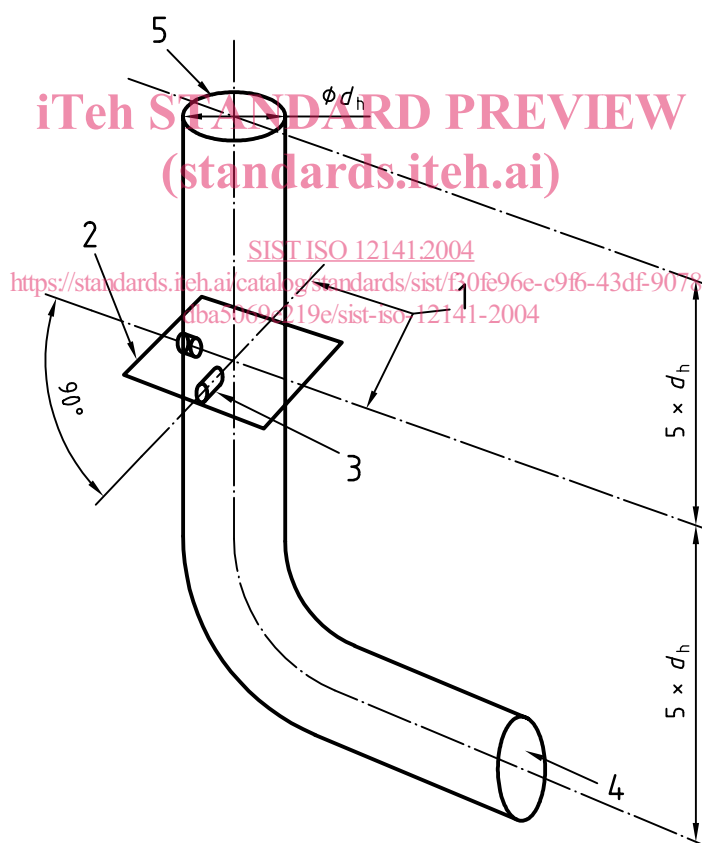**Key**

- 1 Sampling lines
- 2 Sampling plane
- 3 Access port
- 4 Flow
- 5 Top of duct

**Figure 2 — Illustration of definitions in relation to a circular duct**

## ISO 12141:2002(E)

### 3.9

#### **sampling point**

the specific position on a sampling line at which a sample is extracted

### 3.10

#### **standard conditions**

gas pressure and temperature constants and conditions to which volumetric calculations are referred

NOTE For the purposes of this International Standard, standard conditions are 101,325 kPa rounded to 101,3 kPa; 273,15 K rounded to 273 K; dry gas.

### 3.11

#### **overall blank**

test sample taken at the plant site in an identical manner to the normal samples in the series, except that no gas is sampled during the test duration

NOTE The measured mass variation provides an estimation of the uncertainties. The overall blank value, divided by the average sampling volume of the measurement series, provides an estimation of the detection limit (milligrams per cubic metre) of the whole measurement process, as carried out by the operator. The overall blank includes possible deposits on the filter and on all parts upstream.

### 3.12

#### **weighing control**

procedure for the detection/correction of apparent variations in mass due to possible changes between pre- and post-sampling weighing conditions, by using parts, identical to those to be weighed for dust measurements, pretreated and weighed under the same conditions of temperature and humidity (e.g. desiccator) as pre- and post-sampling

NOTE The control parts are kept free from contamination.

### 3.13

#### **measurement series**

successive measurements carried out in the same sampling plane, and under the same process conditions

### 3.14

#### **limit value**

#### **average limit value**

dust concentration that is permitted by authorities for the plant process

NOTE For purposes other than regulatory uses, the measurement value is compared to a stated reference value.

### 3.15

#### **high-volume sampling**

sampling at rates higher than typical in ISO 9096 by using larger-diameter nozzles and higher flowrates to maintain isokinetic sampling conditions

NOTE Nozzle diameters are typically 20 mm to 50 mm, with corresponding flowrates of 5 m<sup>3</sup>/h to 50 m<sup>3</sup>/h.

## 4 Principle

A sample stream of the gas is extracted from the main gas stream at representative sampling points for a measured period of time, with an isokinetically controlled flowrate and a measured volume. The dust entrained in the gas sample is separated by a pre-weighed plane filter, which is then dried and re-weighed. Deposits upstream of the filter in the sampling equipment are also recovered and weighed. The increase in mass of the filter and the deposited mass upstream of the filter are attributed to dust collected from the sampled gas, which allows the dust concentration to be calculated.

Two different configurations of the sampling equipment may be used (see 6.2.1) depending on the characteristics of the gases to be sampled.

Valid measurements can be achieved only when:

- a) the gas stream in the duct at the sampling location has a sufficiently steady velocity (see 5.2);
- b) sampling is carried out without disturbance of the gas stream, under isokinetic conditions, using a sharp-edged nozzle facing into the stream;
- c) samples are taken at a preselected number of stated positions in the sampling plane, to allow for a non-uniform distribution of dust in the duct or stack;
- d) the sampling train is designed and operated to avoid condensation and chemical reactions, to minimize dust deposits upstream of the filter, and to be leak-free;
- e) dust deposits upstream of the filter are taken into account;
- f) the overall blank value does not exceed 10 % of the daily limit set for the process;

NOTE High-volume sampling techniques or an extension of the sampling time may be employed to satisfy this requirement.

- g) the sampling and weighing procedures are adapted to the expected dust quantities.

A measurement series is validated only when the quantity of dust collected during the sampling is at least 5 times a corresponding positive difference in an overall blank. High-volume sampling techniques or an extension of the sampling time may be employed to satisfy this requirement.

Any emission value determined in the test series that is less than the blank value is not valid. However, when measured concentrations are below 5 mg/m<sup>3</sup>, it may not be possible to fulfill this requirement. In such a case, the sampling time shall be extended or a larger sample nozzle and high-volume sampling techniques employed to collect sufficient particulate matter within the specified sampling period.

(standards.iteh.ai)

## 5 Sampling plane and sampling points

SIST ISO 12141:2004

### 5.1 General

<https://standards.iteh.ai/catalog/standards/sist/f30fe96e-c9f6-43df-9078-dba5069e219e/sist-iso-12141-2004>

Sampling is only possible when a suitable location is available, with a sufficiently high and homogeneous gas velocity at the sampling plane.

The sampling plane shall be easily reached from convenient access ports and a safe working platform (see annex A).

Sampling shall be carried out at a sufficient number of sampling points, located on the sampling plane.

### 5.2 Sampling plane

The sampling plane shall be situated in a length of straight duct (preferably vertical) with a constant shape and cross-sectional area. Where possible, the sampling plane shall be as far downstream as possible and upstream from any disturbance that could produce a change in the direction of flow (disturbances can be caused by e.g. bends, fans or partially closed dampers).

Measurements at all the sampling points defined in 5.3 and annex C shall prove that the gas stream in the sampling plane meets the following requirements:

- a) the angle of gas flow is less than 15° with regard to the duct axis (a recommended method for estimation is indicated in annex B);
- b) no local negative flow is present;
- c) the gas velocity is at least the minimum for the flowrate-measuring method used (for Pitot tubes a differential pressure larger than 5 Pa);
- d) the ratio of the highest to lowest local gas velocities is less than 3:1.