



SLOVENSKI STANDARD
SIST-TS CLC/TS 50537-1:2010
01-april-2010

Železniške naprave - Vgrajeni deli za transformatorje vlečnih tokokrogov in hladilni sistem - 1. del: VN skoznjiki za vlečne transformatorje

Railway applications - Mounted parts of the traction transformer and cooling system - Part 1: HV bushing for traction transformers

Bahnanwendungen - Anbauteile des Haupttransformators und Kühlsystems - Teil 1: Hochspannungsdurchführung für Haupttransformatoren

Applications ferroviaires - Accessoires des transformateurs de traction et systèmes de refroidissement - Partie 1: Traversées haute tension pour transformateurs de traction

<https://standards.iteh.ai/catalog/standards/sist/9713b9ec-2ef4-4b78-871f-d6306f09f5e6/sist-ts-clc-ts-50537-1-2010>

Ta slovenski standard je istoveten z: CLC/TS 50537-1:2010

ICS:

29.180	Transformatorji. Dušilke	Transformers. Reactors
45.060.01	Železniška vozila na splošno	Railway rolling stock in general

SIST-TS CLC/TS 50537-1:2010

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST-TS CLC/TS 50537-1:2010](https://standards.iteh.ai/catalog/standards/sist/9713b9ec-2ef4-4b78-871f-d6306f09f5e6/sist-ts-clc-ts-50537-1-2010)

<https://standards.iteh.ai/catalog/standards/sist/9713b9ec-2ef4-4b78-871f-d6306f09f5e6/sist-ts-clc-ts-50537-1-2010>

TECHNICAL SPECIFICATION
SPÉCIFICATION TECHNIQUE
TECHNISCHE SPEZIFIKATION

CLC/TS 50537-1

February 2010

ICS 29.180; 45.060.10

English version

**Railway applications -
Mounted parts of the traction transformer and cooling system -
Part 1: HV bushing for traction transformers**

Applications ferroviaires -
Accessoires des transformateurs
de traction et systèmes
de refroidissement -
Partie 1: Traversées haute tension
pour transformateurs de traction

Bahnanwendungen -
Anbauteile des Haupttransformators
und Kühlsystems -
Teil 1: Hochspannungsdurchführung
für Haupttransformatoren

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST-TS CLC/TS 50537-1:2010](https://standards.iteh.ai/catalog/standards/sist/9713b9ec-2ef4-4b78-871f-d650610915e6/sist-ts-clc-ts-50537-1-2010)

This Technical Specification was approved by CENELEC on 2010-01-22.

CENELEC members are required to announce the existence of this TS in the same way as for an EN and to make the TS available promptly at national level in an appropriate form. It is permissible to keep conflicting national standards in force.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: Avenue Marnix 17, B - 1000 Brussels

Foreword

This Technical Specification was prepared by Working Group 23 of SC 9XB, Electromechanical material on board of rolling stock, of Technical Committee CENELEC TC 9X, Electrical and electronic applications for railways.

It was circulated for voting in accordance with the Internal Regulations, Part 2, Subclause 11.3.3.3 and was accepted as a CENELEC Technical Specification on 2010-01-22.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN and CENELEC shall not be held responsible for identifying any or all such patent rights.

The following date was fixed:

- latest date by which the existence of the CLC/TS
has to be announced at national level (doa) 2010-07-22

The CLC/TS 50537 series "*Railway applications – Mounted parts of the traction transformer and cooling system*" consists of four different parts:


- Part 1: HV bushing for traction transformers;
- Part 2: Pump for insulating liquid for traction transformers and reactors;
- Part 3: Water pump for traction converters;
- Part 4: Gas and liquid actuated (Buchholz) relay for liquid immersed transformers and reactors with conservator for rail vehicles.

The CLC/TS 50537 series shall be read in conjunction with CLC/TS 50534 ¹⁾ "*Railway applications – Generic system architectures for onboard electric auxiliary power systems*".

This standardization project was derived from the EU-funded Research project MODTRAIN (MODPOWER). It is part of a series of standards, referring to each other. The hierarchy of the standards is intended to be as follows:

1) Under development.

Overview on the technical framework
CLC/TS 50534 defines the basis for other depending standards

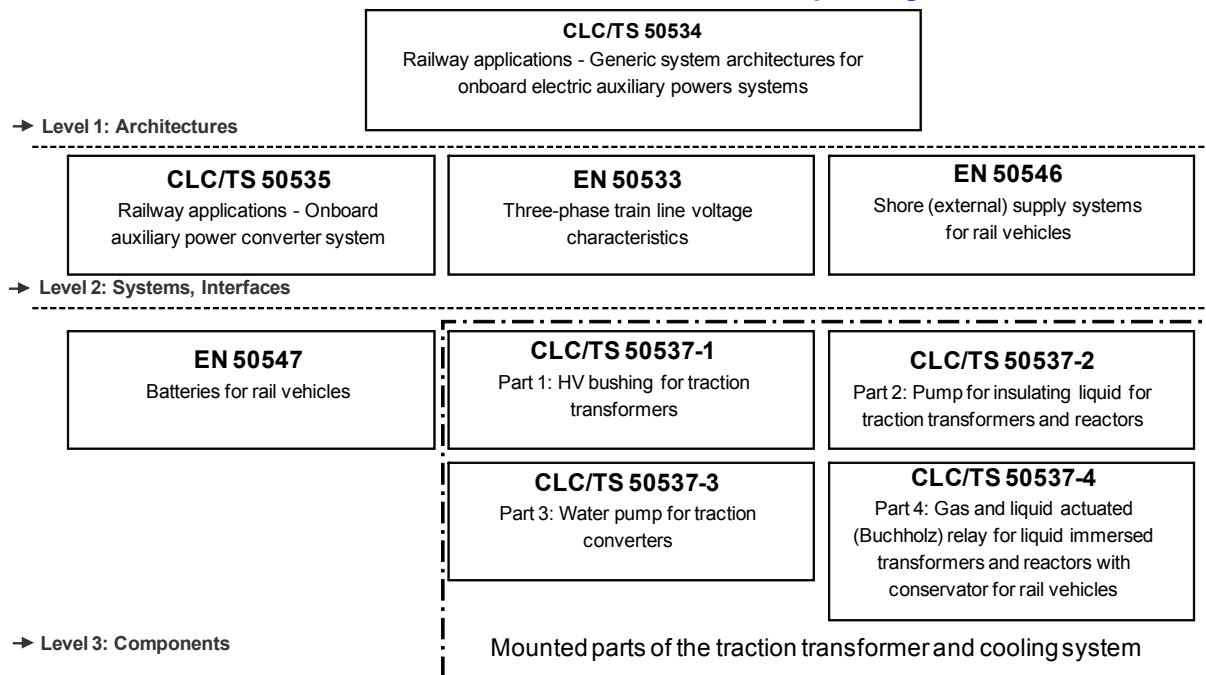

iTeh STANDARD PREVIEW
(standards.itih.ai)

SIST-TS CLC/TS 50537-1:2010

<https://standards.itih.ai/catalog/standards/sist/9713b9ec-2ef4-4b78-871f-d6306f09f5e6/sist-ts-clc-ts-50537-1-2010>

Contents

1	Scope	6
2	Normative references	6
3	Terms, definitions and abbreviations	7
	3.1 Terms and definitions.....	7
	3.2 Abbreviations	9
4	Operating conditions	9
	4.1 General	9
	4.2 Environmental conditions	9
	4.3 Cooling liquid.....	10
	4.4 Shock and vibration	10
	4.5 Storage and transport conditions	10
5	Electrical requirements	10
	5.1 General	10
	5.2 Insulation class and temperature rise	10
	5.3 Rated voltage, current and frequency.....	10
	5.4 Overvoltages	11
	5.5 Short-time currents	11
	5.6 Earthing screen	11
6	Mechanical requirements	12
	6.1 General	12
	6.2 Mechanical envelope	12
	6.3 Plug-in end and immersed end.....	12
7	Fire protection	13
8	Reliability and lifetime	13
9	Markings	14
10	Testing	14
	10.1 General	14
	10.2 List of tests	15
	10.3 Description of tests	15
Annex A (informative) Mechanical flange, flange ring and pressure part		17
	A.1 Mechanical flange and its fixings	17
	A.2 Flange ring and pressure part.....	17
Bibliography		19

Figures

Figure 1 – Maximum outer dimensions of the HV bushing (envelope) and earthing screen position	12
Figure 2 – Immersed end (with outside and inside thread)	13
Figure A.1 – Mechanical flange and its fixings	17
Figure A.2 – Pressure part	18
Figure A.3 – Flange ring	18

Tables

Table 1	11
Table 2	11
Table 3 – List of tests	15

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST-TS CLC/TS 50537-1:2010](https://standards.iteh.ai/catalog/standards/sist/9713b9ec-2ef4-4b78-871f-d6306f09f5e6/sist-ts-clc-ts-50537-1-2010)

<https://standards.iteh.ai/catalog/standards/sist/9713b9ec-2ef4-4b78-871f-d6306f09f5e6/sist-ts-clc-ts-50537-1-2010>

1 Scope

This Technical Specification is applicable to high voltage (HV) bushings, intended for use in traction transformers of rail vehicles, cooled by insulating liquid with rated voltages up to 25 kV single phase and rated currents up to 630 A at frequencies from 16,7 Hz to 60 Hz.

HV bushings within the scope of this Technical Specification are bushings for separable connectors that connect the power supply coming from a contact wire or from a contact rail to the primary winding of the traction transformer. The Technical Specification only deals with HV bushings that are mounted to the transformer.

CLC/TS 50537-1 gives consideration to both technical and normative requirements of the railway environment and restricts the variety provided by industry-wide standards for bushings, such as EN 50180 and EN 60137. It determines requirements and tests enabling the interchangeability especially regarding electrical and mechanical interfaces. Furthermore, service conditions are described.

The cable plug as the counterpart of the HV bushing's plug-in end is not covered by this Technical Specification.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

TS 45545 (series):2009 ²⁾	Railway applications – Fire protection on railway vehicles https://standards.iteh.ai/catalog/standards/sist/9713b9ec-2ef4-4b78-871f-3c606915c63b/ts-clc-ts-50537-1-2010
CLC/TS 50534 ³⁾	Railway applications – Generic system architecture for onboard electric auxiliary power systems
EN 50124-1:2001 + A1:2003 + A2:2005	Railway applications – Insulation coordination – Part 1: Basic requirements – Clearances and creepage distances for all electrical and electronic equipment
EN 50125-1:1999	Railway applications – Environmental conditions for equipment – Part 1: Equipment on board rolling stock
EN 50163:2004 + A1:2007	Railway applications – Supply voltages of traction systems
EN 50180:1997	Bushings above 1 kV up to 36 kV and from 250 A to 3,15 kA for liquid filled transformers
EN 50388:2005	Railway applications – Power supply and rolling stock – Technical criteria for the coordination between power supply (substation) and rolling stock to achieve interoperability
EN 60068-2-14:2009	Environmental testing – Part 2-14: Tests – Test N: Change of temperature (IEC 60068-2-14:2009)
EN 60137:2008	Insulated bushings for alternating voltages above 1 000 V (IEC 60137:2008)

²⁾ Part 5 is of CENELEC origin – Other parts are from CEN.

³⁾ Under development.

EN 60310:2004	Railway applications – Traction transformers and inductors on board rolling stock (IEC 60310:2004)
EN 60529:1991 + A1:2000	Degrees of protection provided by enclosures (IP code) (IEC 60529:1989 + A1:1999)
EN 60721-3-5:1997	Classification of environmental conditions – Part 3: Classification of groups of environmental parameters and their severities – Section 5: Ground vehicle installations (IEC 60721-3-5:1997)
EN 61006:2004	Electrical insulating materials – Methods of test for the determination of the glass transition temperature (IEC 61006:2004)
EN 61373:1999	Railway applications – Rolling stock equipment – Shock and vibration test (IEC 61373:1999)
IEC 60050-551:1998	International Electrotechnical Vocabulary – Part 551: Power electronics
ISO 2859-1:1999 + Cor 1:2001	Sampling procedures for inspection by attributes – Part 1: Sampling schemes indexed by acceptance quality limit (AQL) for lot-by-lot inspection

3 Terms, definitions and abbreviations

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-551:1998 and the following apply.

3.1.1

HV bushing

device mounted to the traction transformer which connects the power supply coming from a contact wire or a contact rail to the primary winding of the traction transformer

3.1.2

bushing for separable connector

plug-in type bushing. One end of the bushing is immersed in an insulating medium and the other end designed to receive a separable insulated cable connector, without which the bushing cannot function

[see also EN 60137]

3.1.3

overvoltage

any voltage having a peak value exceeding the corresponding peak value of maximum steady-state voltage at normal operating conditions

[EN 50124-1]

3.1.4

temporary overvoltage

overvoltage of relatively long duration due to voltage variations

[EN 50124-1]

3.1.5

transient overvoltage

short duration overvoltage of a few milliseconds or less due to current transfer

[EN 50124-1]

3.1.6**nominal voltage**

designated value for a system

[EN 50163]

3.1.7**highest permanent voltage**

maximum value of the voltage likely to be present indefinitely

[EN 50163]

3.1.8**highest non permanent voltage**

maximum value of the voltage likely to be present as highest non permanent voltage for a limited period of time

[EN 50163]

3.1.9**highest long term overvoltage**

voltage defined as the highest value of the long-term overvoltage for $t = 20$ ms. This value is independent from frequency

[EN 50163]

3.1.10**rated impulse voltage**

impulse voltage value assigned by the manufacturer to the equipment or a part of it, characterizing the specified withstand capacity of its insulation against transient overvoltages

[EN 50124-1]

iTeh STANDARD PREVIEW

(standards.iteh.ai)

[SIST-TS CLC/TS 50537-1:2010](https://standards.iteh.ai/catalog/standards/sist/9713b9ec-2ef4-4b78-871f-d6306f09f5e6/sist-ts-clc-ts-50537-1-2010)

<https://standards.iteh.ai/catalog/standards/sist/9713b9ec-2ef4-4b78-871f-d6306f09f5e6/sist-ts-clc-ts-50537-1-2010>

3.1.11**rated insulation voltage**

r.m.s. withstand voltage value assigned by the manufacturer to the equipment or a part of it, characterizing the specified permanent (over five minutes) withstand capacity of its insulation

[EN 50124-1]

3.1.12**clearance**

shortest distance in air between two conductive parts

[EN 50124-1]

3.1.13**creepage distance**

shortest distance along the surface of the insulating material between two conductive parts

[EN 50124-1]

3.1.14**normal operating conditions**

conditions that usually occur during "real" operation

3.1.15**AQL**

quality level that is the worst tolerable process average when a continuing series of lots is submitted for acceptance sampling

[ISO 2859-1]

3.2 Abbreviations

For the purposes of this document, the following abbreviations apply.

HV	High Voltage
MTBF	Mean Time Between Failures

4 Operating conditions

4.1 General

The operation of the HV bushing may be affected by the operating conditions that occur under normal train service conditions, e.g. corrosive gases, carbon dust and other matter from brake shoes and pads or vibration stress.

Among all operating conditions described in this part, malfunction of the HV bushing shall not occur.

4.2 Environmental conditions

The plug-in end of the HV bushing is exposed to the following environmental conditions under which it shall fulfil its proper function.

It is assumed that the cable plug as the counterpart of the HV bushing's plug-in end is connected to the HV bushing. All values apply for the operating voltage and frequency, unless otherwise specified.

Temperature range:

- Ambient temperature: 50 °C ... 85 °C with occasional peaks up to 105 °C
Other values may be agreed between customer and supplier.
- Transport and storage: -50 °C ... 80 °C

Altitude: up to 1 400 m
(EN 50125-1:1999, class A1)

Humidity: 0 % ... 100 %

Climate class: EN 60721-3-5:1997, 5K2

Biological classification: EN 60721-3-5:1997, 5B3

Chemical classification: EN 60721-3-5:1997, 5C3

Contamination: EN 60721-3-5:1997, 5F3

Mechanical-active matters: EN 60721-3-5:1997, 5S3

Rain: EN 60721-3-5:1997, 5K3

Solar radiation: EN 60721-3-5:1997, 5K3