
Aerospace series - Shank nuts, self-locking, in heat resisting nickel base alloy NI-PH-1302 (Waspaloy), silver plated on thread, for 60 swage - Classification: 1210 MPa (at ambient temperature)/730 °C

Aerospace series - Shank nuts, self-locking, in heat resisting nickel base alloy NI-PH-1302 (Waspaloy), silver plated on thread, for 60 swage - Classification: 1210 MPa (at ambient temperature)/730 °C

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Série aérospatiale - Ecrous a sertir, a freinage interne, en alliage résistant a chaud a base de nickel NI-P101HT (Waspaloy) argentés sur filetage, pour sertissage 60° - Classification: 1 210 MPa (a température ambiante)/730°C

Ta slovenski standard je istoveten z: EN 4124:2003

ICS:

49.030.30 Matice Nuts

SIST EN 4124:2004 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 4124:2004](#)

<https://standards.iteh.ai/catalog/standards/sist/b16b66ff-6a19-42cc-b3de-93feb26ab769/sist-en-4124-2004>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 4124

February 2003

ICS 49.030.30

English version

Aerospace series - Shank nuts, self-locking, in heat resisting nickel base alloy NI-PH-1302 (Waspaloy), silver plated on thread, for 60 swage - Classification: 1210 MPa (at ambient temperature)/730 °C

This European Standard was approved by CEN on 14 September 2002.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Luxembourg, Malta, Netherlands, Norway, Portugal, Slovak Republic, Spain, Sweden, Switzerland and United Kingdom.

<https://standards.iteh.ai/catalog/standards/sist/b16b66ff-6a19-42cc-b3de-93feb26ab769/sist-en-4124-2004>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

Foreword.....	3
1 Scope	3
2 Normative references	3
3 Required characteristics	4
3.1 Configuration – Dimensions – Tolerances – Masses.....	4
3.2 Materials.....	4
3.3 Surface treatment	4
4 Designation.....	6
5 Marking	6
6 Technical specification	6

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 4124:2004](https://standards.iteh.ai/catalog/standards/sist/b16b66ff-6a19-42cc-b3de-93feb26ab769/sist-en-4124-2004)

<https://standards.iteh.ai/catalog/standards/sist/b16b66ff-6a19-42cc-b3de-93feb26ab769/sist-en-4124-2004>

Foreword

This document EN 4124:2003 has been prepared by the European Association of Aerospace Manufacturers (AECMA).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of AECMA, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by August 2003, and conflicting national standards shall be withdrawn at the latest by August 2003.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard : Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Luxembourg, Malta, Netherlands, Norway, Portugal, Slovakia, Spain, Sweden, Switzerland and United Kingdom.

iTeh STANDARD PREVIEW (standards.iteh.ai)

1 Scope

This standard specifies the characteristics of self-locking shank nuts in NI-PH-1302, silver plated on thread, for use in 60° cone holes, for aerospace applications. [SIST EN 4124:2004](#)

Classification: 1 210 MPa ¹⁾ / 730 °C ²⁾ <https://standards.iteh.ai/catalog/standards/sist/b16b66ff-6a19-42cc-b3de-93feb26ab769/sist-en-4124-2004>

2 Normative references

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies (including amendments).

- ISO 5855-2 *Aerospace - MJ threads - Part 2: Limit dimensions for bolts and nuts.*
- EN 2424 *Aerospace series – Marking of aerospace products.*
- EN 2786 *Aerospace series - Electrolytic silver plating of fasteners ³⁾.*
- EN 2959 *Aerospace series - Heat resisting nickel base alloy (NI-PH-1302) - Solution treated and cold worked - Bar for hot upset forging for fasteners - $3 \leq D \leq 30$ mm ³⁾.*

1) The strength class of the bolt concerned which can withstand the load at ambient temperature when tested at 100 % load without cracking or breaking of the nut.

2) Maximum test temperature of the parts

3) Published as AECMA Prestandard at the date of publication of the present standard

EN 4124:2003 (E)

EN 3005 *Aerospace series - Nuts, self-locking, in heat resisting nickel base alloy NI-PH-1302 (Waspaloy) - Classification: 1 210 MPa / 730 °C - Technical specification*³⁾.

EN 3220 *Aerospace series - Heat resisting nickel base alloy (NI-PH-1302) - Cold worked and softened - Bar and wire for continuous forging or extrusion for fasteners - $3 \leq D \leq 30$ mm*³⁾.

3 Required characteristics**3.1 Configuration – Dimensions – Tolerances – Masses**

See Figure 1 and Table 1. Dimensions and tolerances are in millimetres. They apply after silver plating.

3.2 Materials

EN 2959 or EN 3220

3.3 Surface treatment


EN 2786 on thread only

Thickness :


- Thread \geq MJ6 : 5 μ m min. on thread flanks ;
- Thread MJ5 : shall show complete coverage, without thickness requirement.

Coating may extend to counterbore and chamfers at manufacturer's option, without thickness requirement.

SIST EN 4124:2004
<https://standards.iteh.ai/catalog/standards/sist/b16b66ff-6a19-42cc-b3de-93feb26ab769/sist-en-4124-2004>

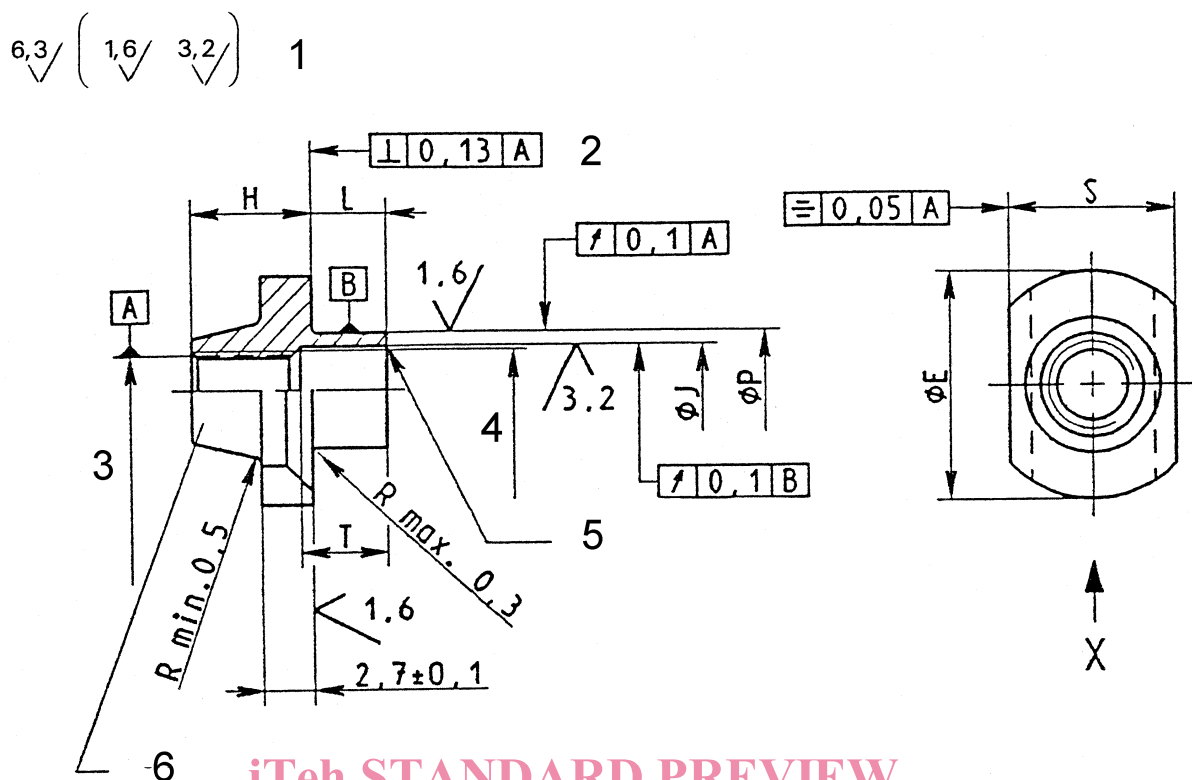

iTeh STANDARD PREVIEW
(standards.iteh.ai)

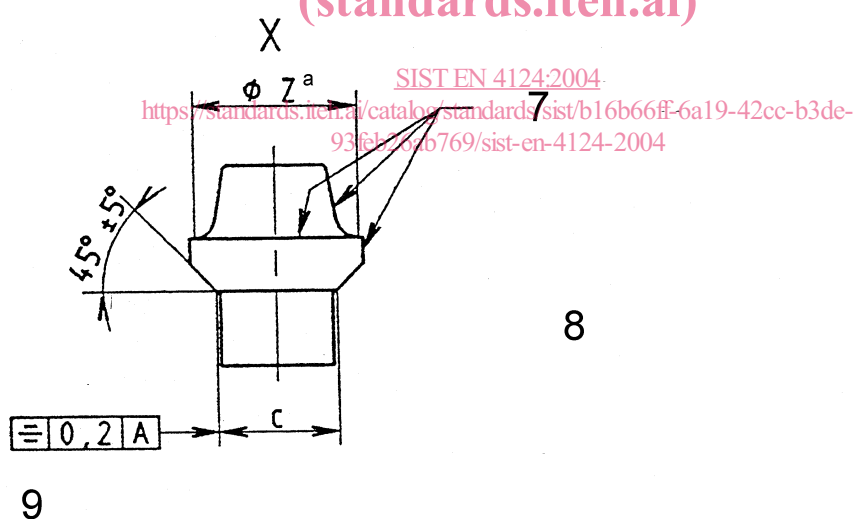

Key

- 1 Values apply before silver plating. Thread surface will be as achieved by normal methods of manufacture.
- 2 Not convex
- 3 Pitch diameter
- 4 Thread
- 5 Chamfer or radius max. 0,08
- 6 Form out-of-round in this area to achieve the self-locking requirement (tooling marks permissible)
- 7 Marking in these areas but not in locking area
- 8 Remove sharp edges 0,1 to 0,4.

Details of form not stated are left to the manufacturer's discretion

^a Limit of the blend radius

Figure 1

EN 4124:2003 (E)

Table 1

Code	Thread ^a Designation	C ± 0,1	E ± 0,25	H h 14	J $\begin{smallmatrix} +0,1 \\ 0 \end{smallmatrix}$	L nom.	Tol.	P $\begin{smallmatrix} 0 \\ -0,1 \end{smallmatrix}$	S ± 0,1	T ± 0,25	Z max.	Mass Kg/1000 parts ≈
050	MJ5x0,8-4H6H	7	13	7	5,2	1,8	$\begin{smallmatrix} +0,1 \\ 0 \end{smallmatrix}$	6,5	9,5	2,4	8,5	2,7
060	MJ6x1-4H5H	8	14	8	6,2			7,5	10,5		9,5	3,35
070	MJ7x1-4H5H	9	16	9	7,2	2,8	$\begin{smallmatrix} +0,15 \\ 0 \end{smallmatrix}$	8,5	11,5	3,4	10,5	4,16
080	MJ8x1-4H5H	10	17	10	8,2	3,2		9,5	12,5	3,9	11,5	5,4

^a In accordance with ISO 5855-2. In the self-locking zone, the tolerances apply before forming out-of-round.

4 Designation

EXAMPLE :

Description block

Identity block

NUT

EN4124- 050

Number of this standard

Thread code (see Table 1)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

NOTE If necessary, the code I9005 shall be placed between the description block and the identity block.

SIST EN 4124:2004

<https://standards.iteh.ai/catalog/standards/sist/b16b66ff-6a19-42cc-b3de-93feb26ab769/sist-en-4124-2004>

5 Marking

EN 2424, style A, as indicated on Figure 1.

6 Technical specification

EN 3005