

INTERNATIONAL STANDARD



**Fibre optic interconnecting devices and passive components – Fibre optic
connector interfaces –
Part 4: Type SC connector family**

Document Preview

[IEC 61754-4:2022](#)

<https://standards.iteh.ai/catalog/standards/iec/c23c9ee-71ea-4b61-99e3-1e10d63c7a6b/iec-61754-4-2022>





THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2022 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

International Standards
standards.iteh.ai
Document Preview

[IEC 61754-4:2022](https://standards.iteh.ai/catalog/standards/iec/c23cf9ee-71ea-4b61-99e3-1e10d63c7a6b/iec-61754-4-2022)

<https://standards.iteh.ai/catalog/standards/iec/c23cf9ee-71ea-4b61-99e3-1e10d63c7a6b/iec-61754-4-2022>



IEC 61754-4

Edition 3.0 2022-02
REDLINE VERSION

INTERNATIONAL STANDARD



Fibre optic interconnecting devices and passive components – Fibre optic
connector interfaces –
Part 4: Type SC connector family

Document Preview

[IEC 61754-4:2022](https://standards.iteh.ai/standards/iec/c23c9ee-71ea-4b61-99e3-1e10d63c7a6b/iec-61754-4-2022)

<https://standards.iteh.ai/catalog/standards/iec/c23c9ee-71ea-4b61-99e3-1e10d63c7a6b/iec-61754-4-2022>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.180.20

ISBN 978-2-8322-5121-8

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	4
1 Scope	6
2 Normative references	6
3 Terms and definitions	6
4 Description	6
5 Interfaces	7
Annex A (informative) Panel dimensions	37
A.1 General.....	37
A.2 Simplex adaptor.....	37
A.3 Duplex adaptor	37
Bibliography.....	39
Figure 1 – Simplex PC plug connector interface	8
Figure 2 – Simplex adaptor connector interface	11
Figure 3 – Pin gauge for adaptor.....	13
Figure 4 – Duplex PC plug connector interface	14
Figure 5 – Duplex adaptor connector interface.....	17
Figure 6 – Simplex APC angled PC plug connector interface	19
Figure 7 – Duplex APC angled PC plug connector interface	22
Figure 8 – Simplex active device receptacle interface for APC angled PC connector plug	25
Figure 9 – Simplex active device receptacle interface for PC connector plug	28
Figure 10 – Duplex active device receptacle interface for APC angled PC connector plug	31
Figure 11 – Duplex active device receptacle interface for PC connector plug	34
Figure A.1 – Panel cut out	37
Figure A.2 – Fixture cut out.....	37
Table 1 – Interfaces	7
Table 2 – Intermateability of interfaces	7
Table 3 – Dimensions of the simplex PC plug connector interface.....	9
Table 4 – Grade characteristics for simplex PC plug connector	10
Table 5 – Dimensions of the simplex adaptor connector interface	12
Table 6 – Grade characteristics for simplex adaptor connector	12
Table 7 – Pin gauge dimensions	13
Table 8 – Dimensions of the duplex PC plug connector interface	15
Table 9 – Grade characteristics for duplex PC plug connector	16
Table 10 – Dimensions of the duplex adaptor connector interface.....	18
Table 11 – Grade of the duplex adaptor connector.....	18
Table 12 – Dimensions of the simplex APC angled PC plug connector interfaces.....	20
Table 13 – Dimensions of the duplex APC angled PC plug connector interfaces	21

Table 14 – Dimensions of the simplex active device receptacle interface for APC angled PC connector plug	26
Table 15 – Alignment feature grade of the simplex active device receptacle interface for angled PC connector plug	27
Table 16 – Mechanical stop feature grade of the simplex active device receptacle interface for angled PC connector plug	27
Table 17 – Dimensions of the simplex active device receptacle interface for PC connector plug	29
Table 18 – Alignment feature grade of the simplex active device receptacle interface for PC connector plug	30
Table 19 – Mechanical stop feature grade of the simplex active device receptacle interface for PC connector plug	30
Table 20 – Dimensions of the duplex active device receptacle interface for APC angled PC connector plug	32
Table 21 – Alignment feature grade of the duplex active device receptacle interface for angled PC connector plug	33
Table 22 – Mechanical stop feature grade of the duplex active device receptacle interface for angled PC connector plug	33
Table 23 – Dimensions of the duplex active device receptacle interface for PC connector plug	35
Table 24 – Alignment feature grade of the duplex active device receptacle interface for PC connector plug	36
Table 25 – Mechanical stop feature grade of the duplex active device receptacle interface for PC connector plug	36
Table A.1 – Dimensions for simplex adaptor	37
Table A.2 – Dimensions for duplex adaptor	38

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**FIBRE OPTIC INTERCONNECTING
DEVICES AND PASSIVE COMPONENTS –
FIBRE OPTIC CONNECTOR INTERFACES –****Part 4: Type SC connector family****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition IEC 61754-4:2013. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

IEC 61754-4 has been prepared by subcommittee 86B: Fibre optic interconnecting devices and passive components, of IEC technical committee 86: Fibre optics. It is an International Standard.

This third edition cancels and replaces the second edition published in 2013 and constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) the test method IEC 61300-3-22 for the compression force of the ferrule was added;
- b) Annex A (informative) with cut out dimension requirements for testing the strength of mounted adaptors was added.

The text of this International Standard is based on the following documents:

Draft	Report on voting
86B/4563/FDIS	86B/4584/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

A list of all parts of the IEC 61754 series, under the general title *Fibre optic interconnecting devices and passive components – Fibre optic connector interfaces*, can be found on the IEC website.

<https://standards.iteh.ai/catalog/standards/iec/c23cf9ee-71ea-4b61-99e3-1e10d63c7a6b/iec-61754-4-2022>

Future standards in this series will carry the new general title as cited above. Titles of existing standards in this series will be updated at the time of the next edition.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – FIBRE OPTIC CONNECTOR INTERFACES –

Part 4: Type SC connector family

1 Scope

This part of IEC 61754 ~~defines~~ specifies the standard interface dimensions for type SC family of connectors.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

~~IEC 61755-3-1, Fibre optic connector optical interfaces – Part 3-1: Optical interface, 2,5 mm and 1,25 mm diameter cylindrical full zirconia PC ferrule, single mode fibre~~

~~IEC 61755-3-2, Fibre optic connector optical interfaces – Part 3-2: Optical interface, 2,5 mm and 1,25 mm diameter cylindrical full zirconia ferrules for 8 degrees angled PC single mode fibres~~

IEC 61300-3-22, Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-22: Examinations and measurements – Ferrule compression force

<http://standards.iteh.ai/catalog/standards/iec/c23c9ee-71ea-4b61-99e3-1e10d63c7a6b/iec-61754-4-2022>

IEC 61754-1, Fibre optic interconnecting devices and passive components – Fibre optic connector interfaces – Part 1: General and guidance

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 61754-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

4 Description

The parent connector for the type SC connector family is a single position plug connector characterized by a 2,5 mm nominal ferrule diameter. It includes a push-pull coupling mechanism which is spring loaded relative to the ferrule in the direction of the optical axis. The plug has a single male key which may be used to orient and limit the relative position between the connector and the component to which it is mated. The optical alignment mechanism of the connector is of a ~~resilient~~ sleeve style.

This document defines the standard interface dimensions of active device receptacles for the type SC connectors. The receptacles are used to retain the connector plug and mechanically maintain the optical datum target of the plugs at a defined position within the receptacle housings.

5 Interfaces

This document contains the standard interfaces showed in Table 1.

Table 1 – Interfaces

Interface IEC 61754-4-1	Simplex plug connector interface – push/pull, physical contact (PC)
Interface IEC 61754-4-2	Simplex adaptor connector interface – push/pull
Interface IEC 61754-4-3	Duplex plug connector interface – push/pull, PC
Interface IEC 61754-4-4	Duplex adaptor connector interface – push/pull
Interface IEC 61754-4-5	Simplex plug connector interface – push/pull, angled PC (APC) 8°
Interface IEC 61754-4-6	Duplex plug connector interface – push/pull, APC 8°
Interface IEC 61754-4-X1	Simplex active device receptacle interface – for APC 8° connector plug
Interface IEC 61754-4-X2	Simplex active device receptacle interface – for PC connector plug
Interface IEC 61754-4-X3	Duplex active device receptacle interface – for APC 8° connector plug
Interface IEC 61754-4-X4	Duplex active device receptacle interface – for PC connector plug

~~The plug of interface IEC 61754-4-1 and interface IEC 61754-4-3 has a ferrule with a spherically polished endface (PC). The plug of interface IEC 61754-4-5 and interface IEC 61754-4-6 has a ferrule with a spherically polished angled endface which may take any of the angled PC (APC) forms and realizes a physical contact.~~

Table 2 shows the intermateability of interfaces.

Table 2 – Intermateability of interfaces

Plugs	Adaptors/active device receptacles					
	61754-4-2	61754-4-4	61754-4-X1	61754-4-X2	61754-4-X3	61754-4-X4
61754-4-1	Mate	Mate	Not mate	Mate	Not mate	Mate
61754-4-3	Not mate	Mate	Not mate	Not mate	Not mate	Mate
61754-4-5	Mate	Mate	Mate	Not mate	Mate	Not mate
61754-4-8 61754-4-6	Not mate	Mate	Not mate	Not mate	Mate	Not mate

Figure 1 is an example of a simplex PC plug connector interface. Table 3 gives dimensions of the simplex PC plug connector interface and Table 4 gives the grade characteristics for simplex PC plug connector interface.

A chamfer or radius is allowed to a maximum depth of ~~1,2~~ 1,8 mm from the ferrule endface.

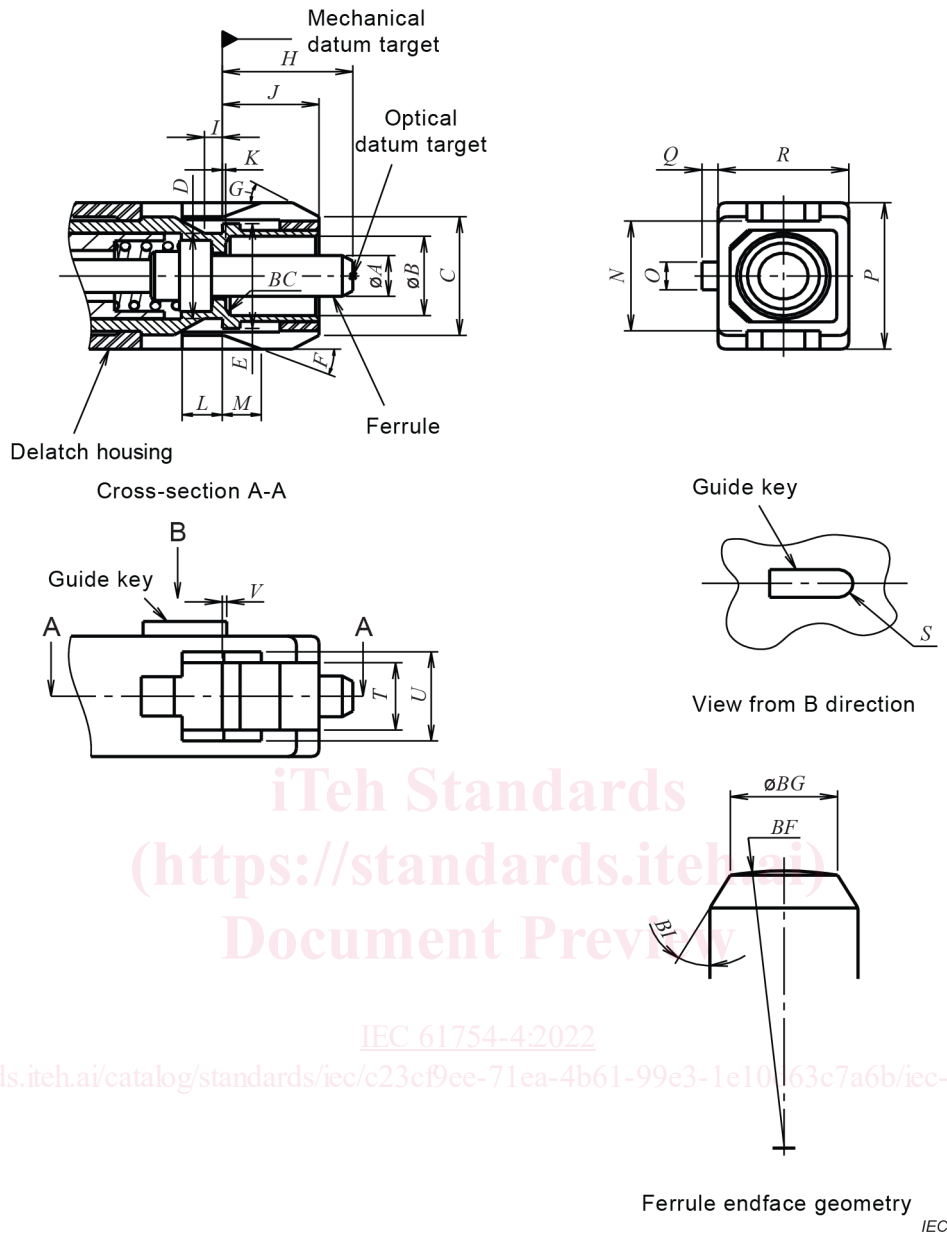


Figure 1 – Simplex PC plug connector interface

Table 3 – Dimensions of the simplex PC plug connector interface

Reference	Dimensions		Remarks
	Minimum	Maximum	
<i>A</i>	2,500 mm See Table 4		
<i>B</i>	4,8 mm	4,9 mm	
<i>C</i>	6,8 mm	7,4 mm	
<i>D</i>	4,9 mm	5,3 mm	
<i>E</i>	6,7 mm	6,8 mm	
<i>F</i>	19°	23°	Angle, unit in degrees
<i>G</i>	25°	35°	Angle, unit in degrees
<i>H</i>	7,15 mm	7,5 mm	a
<i>I</i>	0,8 mm	1,2 mm	
<i>J</i>	5,3 mm	5,5 mm	
<i>K</i>	–	0,05 mm	
<i>L</i>	2,11 mm	–	b
<i>M</i>	2,0 mm	2,8 mm	b c
<i>N</i>	6,6 mm	6,8 mm	
<i>O</i>	1,6 mm	1,8 mm	
<i>P</i>	8,89 mm	8,99 mm	
<i>Q</i>	0,8 mm	1,0 mm	
<i>R</i>	7,29 mm	7,39 mm	
<i>S</i>	0,8 mm	0,90 mm	Radius
<i>T</i>	4,05 mm	4,15 mm	
<i>U</i>	5,4 mm	5,6 mm	
<i>V</i>	0 mm	0,5 mm	b
<i>BC</i>	0°	0,5°	45° chamfer
<i>BF</i>	5 mm	30 mm	Radius, ^d
<i>BG</i>	0,8 mm	–	Diameter, ^e
<i>BC</i>	0 mm	0,5 mm	Chamfer or round
<i>BF</i>	See IEC 61755-3-1		Radius ^d
<i>BG</i>	See IEC 61755-3-1		Diameter
<i>BI</i>	25°	35°	Angle, unit in degrees
<p>^a Dimension <i>H</i> is given for plug endface when not mated. It The ferrule is movable by a certain axial compression force, with direct contacting endfaces, and therefore dimension <i>H</i> is variable. Ferrule compression force shall be 7,8 N to 11,8 N when dimension <i>H</i> is 7,0 mm ± 0,1 mm. The compression force shall be measured according to IEC 61300-3-22.</p> <p>^b Coupling sleeve shall be movable toward right and left direction. These dimensions are given when the coupling sleeve is moved in its most right direction position. The delatch housing shall be movable to the right or left. Dimensions <i>L</i>, <i>M</i> and <i>V</i> are given when the delatch housing is at the furthest right. Dimension <i>M</i> shall be negative, when the delatch housing is at the furthest left.</p> <p>^c Dimension <i>M</i> shall be below 0 mm, when a coupling sleeve is moved to its most left direction position. The right end of <i>M</i> shall be at the left of the mechanical datum target when the delatch housing is at the furthest left.</p> <p>^d Dome eccentricity of the spherical polished endface shall be less than 70 50 µm.</p> <p>^e See IEC 61755-3-1.</p>			

Table 4 – Grade characteristics for simplex PC plug connector

Grade	Dimensions		Remarks
	mm		
	<i>A</i>		
	Minimum	Maximum	
A	See IEC 61755-3-1		a
B	See IEC 61755-3-1		a
C	See IEC 61755-3-1		a
D	See IEC 61755-3-1		a
Am	2,497	2,500	b
Bm	2,497	2,500	b
Cm	2,494	2,500	b
A _m	Grade not specified at this time		a b
B _m	2,497	2,500	a b
C _m	2,494	2,500	a b
a See IEC 61755-3-1 . Add the grade number to the interface reference number.			
b Refer to future IEC 61755-6-1 for guidance ¹ .			

Figure 2 is an example of a simplex adaptor connector interface. Table 5 gives dimensions of the simplex adaptor connector interface and Table 6 gives the grade of the simplex adaptor connector interface.

[IEC 61754-4:2022](https://standards.iteh.ai/catalog/standards/iec/c23cf9ee-71ea-4b61-99e3-1e10d63c7a6b/iec-61754-4-2022)

<https://standards.iteh.ai/catalog/standards/iec/c23cf9ee-71ea-4b61-99e3-1e10d63c7a6b/iec-61754-4-2022>

¹ Under preparation. Stage at the time of publication: IEC/CDM 61755-6-1:2021.

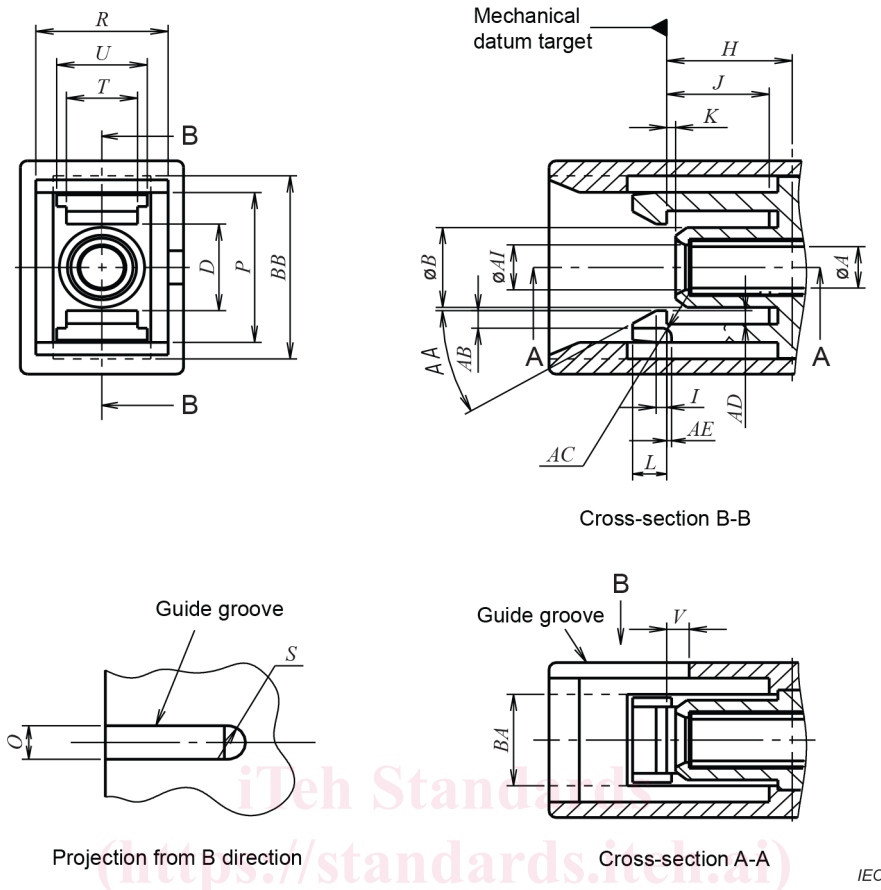


Figure 2 – Simplex adaptor connector interface

<https://standards.iteh.ai>

<https://standards.iteh.ai/catalog/standards/iec/c23c9ee-71ea-4b61-99e3-1e10d63c7a6b/iec-61754-4-2022>

IEC

Table 5 – Dimensions of the simplex adaptor connector interface

Reference	Dimensions		Remarks
	Minimum	Maximum	
<i>A</i>	See Table 6		
<i>B</i>	4,69 4,39 mm	4,79 mm	
<i>D</i>	4,9 mm	5,5 mm	
<i>H</i>	6,9 mm	7,1 mm	
<i>I</i>	0,4 mm	0,8 mm	
<i>J</i>	5,51 mm	5,90 mm	
<i>K</i>	0,06 mm	1,00 mm	
<i>L</i>	1,9 mm	2,1 mm	
<i>O</i>	2,0 mm	2,2 mm	
<i>P</i>	9,0 mm	9,1 mm	
<i>R</i>	7,4 mm	7,5 mm	
<i>S</i>	1,0 mm	1,1 mm	Radius
<i>T</i>	3,80 mm	4,04 mm	
<i>U</i>	5,0 mm	5,3 mm	
<i>V</i>	0,6 mm	1,6 mm	
<i>AA</i>	27°	33°	Angle, unit in degrees
<i>AB</i>	0,8 mm	1,0 mm	
<i>AC</i>	0,4 mm	0,6 mm	Radius
<i>AD</i>	0,7 mm	0,8 mm	
<i>AE</i>	0,4 mm	0,6 mm	
<i>AI</i>	2,7 mm	2,8 mm	
<i>BA</i>	5,4 mm	5,6 mm	^a
<i>BB</i>	10,8 mm	11,2 mm	^a

^a It may be of a structure as shown by an alternate long and short dash line shown in Figure 2. The dotted line structure in Figure 2 is a groove-shape preventing interference when the latch is deformed. It is optional.

Table 6 – Grade characteristics for simplex adaptor connector

Grade	Dimensions		Remarks
	mm		
	<i>A</i>		
	Minimum	Maximum	
^a			Resilient sleeve ^{a b}

^a Add the grade number to the interface reference number.

^b The connector alignment feature is a resilient sleeve. The feature shall accept a pin gauge shown in Figure 3 to the centre of the adaptor with a force of 2 N to 5,9 N under the condition that another pin gauge is inserted into the feature from the other side. The centre of the adaptor is defined by the right side position of dimension *H*.

Figure 3 is an example of a pin gauge for adaptor. Table 7 gives pin gauge dimensions.