



## SLOVENSKI STANDARD

**DSIST ETS 300 360:1997**

**01!jUbi Ur-1997**

---

**Digitalno omrežje z integriranimi storitvami (ISDN) - Signalizacija št. 7 - Specifikacija signalizacijskega vzajemnega delovanja druge različice ISDN-uporabniškega dela (ISUP)**

Integrated Services Digital Network (ISDN); Signalling System No.7; Signalling interworking specification for ISDN User Part (ISUP) version 2

---

**Ta slovenski standard je istoveten z:      ETS 300 360 E1.% - ) !\$&**

---


**ICS:**

33.080	Digitalno omrežje z integriranimi storitvami (ISDN)	Integrated Services Digital Network (ISDN)
--------	---	--

**DSIST ETS 300 360:1997**

**en**



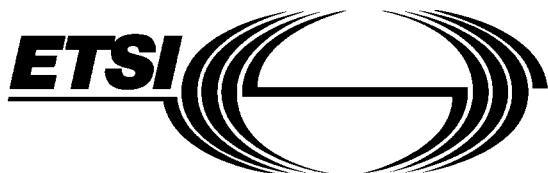

**EUROPEAN  
TELECOMMUNICATION  
STANDARD**

---

**ETS 300 360**

February 1995

Source: ETSI TC-SPS

Reference: DE/SPS-6006

ICS: 33.080

**Key words:** ISDN, SS7, ISUP, interworking

**Integrated Services Digital Network (ISDN);  
Signalling System No.7;  
Signalling interworking specification  
for ISDN User Part (ISUP) version 2**

**ETSI**

European Telecommunications Standards Institute

**ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE

**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

**X.400:** c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

**Page 2**

**ETS 300 360: February 1995**

## Contents

Foreword .....	9
1 Scope .....	11
2 Normative references .....	11
3 Definitions, symbols and abbreviations .....	12
3.1 Definitions.....	12
3.2 Symbols .....	12
3.3 Abbreviations.....	12
4 General considerations .....	14
4.1 General.....	14
4.2 Working assumptions .....	14
5 Miscellaneous interworking aspects .....	15
5.1 Interworking handling of the echo control device indicator (or the incoming half echo suppressor indicator) of the address complete message in ISUP (or TUP/TUP+) .....	15
5.1.1 Interworking from ISUP to R2, No.5.....	15
5.1.2 Interworking from ISUP to TUP/TUP+.....	15
5.1.3 Interworking from TUP/TUP+ to ISUP .....	15
5.2 Handling of the called party's category and the charge indicator in case of interworking TUP/TUP+ to ISUP.....	16
5.3 Transfer of no charge or charge information in the answer message in case of interworking TUP/TUP+ to ISUP .....	16
5.4 Simple segmentation .....	16
5.5 Handling an early ACM when interworking from TUP to ISUP.....	16
6 Interworking.....	17
6.1 Interworking from Signalling System ISUP to Signalling System No.5 .....	17
6.1.1 Forward direction .....	17
6.1.1.1 Circuit seizure.....	17
6.1.1.2 Address information sending sequence.....	17
6.1.1.3 Forward transfer .....	17
6.1.1.4 Call release and call failures .....	18
6.1.2 Backward direction.....	18
6.1.2.1 Address complete.....	18
6.1.2.2 Answer .....	18
6.1.2.3 Clear-back/re-answer sequence .....	18
6.1.2.4 Call release and call failures .....	18
6.1.2.5 Fallback.....	19
6.1.2.6 Propagation delay.....	19
6.1.3 Considerations on supplementary services .....	19
6.1.3.1 Connected Line identification Presentation (COLP)/Connected Line identification Restriction (COLR) ..	19
6.1.3.2 Closed User Group (CUG) .....	19
6.1.3.3 User-to-User Signalling (UUS).....	19
6.1.3.3.1 UUS Service 1 (UUS1) implicit.....	19
6.1.3.3.2 UUS1 explicit, non-essential .....	19
6.1.3.3.3 UUS Service 2 (UUS2) explicit, non-essential.....	20
6.1.3.3.4 UUS Service 3 (UUS3) explicit, non-essential, requested during call set-up.....	20

	6.1.3.3.5	UUS3 explicit, non-essential, requested after call set-up .....	20
6.2	Interworking from Signalling System ISUP to Signalling System R2 .....	20	20
6.2.1	Forward direction .....	20	20
6.2.1.1	Address information sending sequence.....	20	20
6.2.1.2	Language or discriminating digit .....	20	20
6.2.1.3	Calling party's category .....	20	20
6.2.1.4	Satellite.....	21	21
6.2.1.5	Continuity check.....	21	21
6.2.1.6	Echo control .....	21	21
6.2.1.7	Forward transfer.....	21	21
6.2.1.8	Call release and call failure .....	21	21
6.2.2	Backward direction .....	22	22
6.2.2.1	Address complete.....	22	22
6.2.2.2	Answer .....	22	22
6.2.2.3	Clear-back/re-answer sequence .....	22	22
6.2.2.4	Call release and call failures .....	22	22
6.2.2.5	Fallback .....	23	23
6.2.2.6	Propagation delay.....	23	23
6.2.3	Considerations on supplementary services .....	23	23
6.2.3.1	COLP/COLR .....	23	23
6.2.3.2	CUG .....	24	24
6.2.3.3	UUS.....	24	24
6.2.3.3.1	UUS1 implicit.....	24	24
6.2.3.3.2	UUS1 explicit, non-essential.....	24	24
6.2.3.3.3	UUS2 explicit, non-essential.....	24	24
6.2.3.3.4	UUS3 explicit, non-essential, requested during call set-up .....	24	24
6.2.3.3.5	UUS3 explicit, non-essential, requested after call set-up .....	24	24
6.3	Interworking from Signalling System ISUP to Signalling System TUP .....	24	24
6.3.1	Forward direction .....	24	24
6.3.1.1	Initial address message.....	24	24
6.3.1.1.1	Calling party's category.....	25	25
6.3.1.1.2	Message indicators .....	25	25
6.3.1.2	Continuity message.....	26	26
6.3.1.3	Forward transfer.....	26	26
6.3.1.4	Call release and call failures .....	26	26
6.3.2	Backward direction .....	26	26
6.3.2.1	General request message .....	26	26
6.3.2.1.1	Calling party category request .....	26	26
6.3.2.1.2	Calling line identity request .....	27	27
6.3.2.2	Address complete.....	27	27
6.3.2.3	Answer .....	27	27
6.3.2.4	Clear-back/re-answer sequence .....	28	28
6.3.2.5	Call release and call failures .....	28	28
6.3.2.6	Fallback .....	29	29
6.3.2.7	Propagation delay.....	29	29
6.3.3	Considerations on supplementary services .....	29	29
6.3.3.1	COLP/COLR .....	29	29
6.3.3.2	CUG .....	29	29
6.3.3.3	UUS.....	30	30
6.3.3.3.1	UUS1 implicit.....	30	30
6.3.3.3.2	UUS1 explicit, non-essential.....	30	30
6.3.3.3.3	UUS2 explicit, non-essential.....	30	30
6.3.3.3.4	UUS3 explicit, non-essential, requested during call set-up .....	30	30
6.3.3.3.5	UUS3 explicit, non-essential, requested after call set-up .....	30	30

6.4	Interworking of Signalling System No.5 to Signalling System ISUP .....	30
6.4.1	Forward direction .....	30
6.4.1.1	Initial address message .....	30
6.4.1.1.1	Called party number .....	30
6.4.1.1.2	Calling party's category .....	31
6.4.1.1.3	Forward call indicators.....	31
6.4.1.1.4	Nature of connection.....	31
6.4.1.1.5	Transmission medium requirement.....	32
6.4.1.1.6	Propagation delay .....	32
6.4.1.2	Forward transfer .....	32
6.4.1.3	Call release and call failures .....	32
6.4.2	Backward direction.....	32
6.4.2.1	Address complete.....	32
6.4.2.2	Answer .....	32
6.4.2.3	Connect .....	32
6.4.2.4	Clear-back/re-answer sequence .....	32
6.4.2.5	Call release and call failures .....	32
6.4.3	Considerations on supplementary services .....	33
6.4.3.1	Malicious Call Identification (MCID) .....	33
6.4.3.2	UUS3 explicit, non-essential, requested after call set-up ..	33
6.5	Interworking from Signalling System R2 to Signalling System ISUP .....	33
6.5.1	Forward direction .....	33
6.5.1.1	Initial address message .....	33
6.5.1.1.1	Called party number .....	33
6.5.1.1.2	Calling party's category .....	34
6.5.1.1.3	Forward call indicators.....	34
6.5.1.1.4	Nature of connection.....	34
6.5.1.1.5	Transmission medium requirement.....	35
6.5.1.1.6	Propagation delay .....	35
6.5.1.2	Call release and call failures .....	35
6.5.2	Backward direction.....	35
6.5.2.1	Address complete.....	35
6.5.2.2	Answer .....	35
6.5.2.3	Connect .....	35
6.5.2.4	Clear-back/re-answer sequence .....	36
6.5.2.5	Call release and call failures .....	36
6.5.3	Considerations on supplementary services .....	36
6.5.3.1	MCID.....	36
6.5.3.2	UUS3 explicit, non-essential, requested after call set-up ..	37
6.6	Interworking from Signalling System TUP to Signalling System ISUP .....	37
6.6.1	Forward direction .....	37
6.6.1.1	Initial address message .....	37
6.6.1.1.1	Called party number .....	37
6.6.1.1.2	Calling party's category .....	37
6.6.1.1.3	Forward call indicators.....	38
6.6.1.1.4	Nature of connection.....	38
6.6.1.1.5	Transmission medium requirement.....	38
6.6.1.1.6	Redirection information .....	39
6.6.1.1.7	Propagation delay .....	39
6.6.1.2	Continuity message.....	39
6.6.1.3	Forward transfer .....	39
6.6.1.4	Call release and call failures .....	40
6.6.2	Backward direction.....	40
6.6.2.1	Address complete.....	40
6.6.2.2	Answer .....	40
6.6.2.3	Connect .....	41
6.6.2.4	Clear-back/re-answer sequence .....	41
6.6.2.5	Call release and call failures .....	41
6.6.3	Considerations on supplementary services .....	42
6.6.3.1	MCID.....	42

6.6.3.2	UUS3 explicit, non-essential, requested after call set-up ....	43
6.7	Interworking from Signalling System ISUP to Signalling System TUP+ .....	43
6.7.1	Forward direction .....	43
6.7.1.1	Initial address message with additional information.....	43
6.7.1.1.1	Calling party's category.....	43
6.7.1.1.2	Calling access signalling capability .....	43
6.7.1.1.3	Message indicators .....	43
6.7.1.1.4	First indicator octet.....	44
6.7.1.1.5	Closed user group information .....	44
6.7.1.1.6	Additional calling party information .....	44
6.7.1.1.7	Additional routeing information .....	45
6.7.1.1.8	Calling line identity .....	45
6.7.1.2	Continuity message.....	45
6.7.1.3	Forward transfer.....	45
6.7.1.4	Call release and call failures .....	45
6.7.2	Backward direction .....	46
6.7.2.1	General request message .....	46
6.7.2.1.1	Calling line identity request .....	46
6.7.2.2	Address complete.....	46
6.7.2.3	Answer .....	47
6.7.2.4	Clear-back/re-answer sequence .....	47
6.7.2.5	Call release and call failures .....	48
6.7.2.6	Fallback .....	48
6.7.2.7	Propagation delay.....	48
6.7.3	Considerations on supplementary services .....	49
6.7.3.1	UUS.....	49
6.7.3.1.1	UUS1 implicit.....	49
6.7.3.1.2	UUS1 explicit, non-essential.....	49
6.7.3.1.3	UUS2 explicit, non-essential.....	49
6.7.3.1.4	UUS3 explicit, non-essential, requested during call set-up .....	49
6.7.3.1.5	UUS3 explicit, non-essential, requested after call set-up .....	49
6.7.3.1.6	UUS2, explicit, essential .....	49
6.7.3.1.7	UUS3 explicit, essential, requested during call set-up .....	49
6.7.3.2	CLIP/CLIR .....	49
6.7.3.3	CUG .....	51
6.7.3.4	COLP/COLR .....	51
6.7.3.5	Subaddressing.....	51
6.7.4	Coding of bearer capability and high layer compatibility .....	52
6.7.4.1	Bearer capability.....	52
6.7.4.2	High layer compatibility.....	52
6.8	Interworking of Signalling System TUP+ to Signalling System ISUP .....	52
6.8.1	Forward direction .....	52
6.8.1.1	Initial address message.....	52
6.8.1.1.1	Called party number .....	52
6.8.1.1.2	Calling party's category.....	52
6.8.1.1.3	Forward call indicators.....	53
6.8.1.1.4	Nature of connection .....	53
6.8.1.1.5	Transmission medium requirement .....	54
6.8.1.1.6	Access transport .....	54
6.8.1.1.7	Optional forward call indicators.....	54
6.8.1.1.8	Closed user group interlock code .....	54
6.8.1.1.9	User-to-user information .....	54
6.8.1.1.10	User service information .....	54
6.8.1.1.11	Redirection information .....	54
6.8.1.1.12	Propagation delay .....	55
6.8.1.2	Continuity message.....	55
6.8.1.3	Call release and call failures .....	55