



SLOVENSKI STANDARD

SIST EN 50411-3-2:2011

01-junij-2011

Delilniki za optična vlakna in kabelske spojnice za optične komunikacijske sisteme - Specifikacije izdelka - 3-2. del: Enorodna mehanska optična spojnica

Fibre organisers and closures to be used in optical fibre communication systems -
Product specifications - Part 3-2: Singlemode mechanical fibre splice

LWL-Spleißkassetten und -Muffen für die Anwendung in LWL Kommunikationssystemen
- Produktnorm - Teil 3-2: Mechanische Spleiße von Einmodenfasern

Organiseurs et boîtiers de fibres destinés à être utilisés dans les systèmes de
communication par fibres optiques - Spécifications de produit - Partie 3-2 : Epissures
mécaniques de fibres unimodales

<https://standards.iteh.ai/catalog/standards/sist/1ac23801-1194-4896-b5b0-178ec5087b44/sist-en-50411-3-2-2011>

Ta slovenski standard je istoveten z: EN 50411-3-2:2011

ICS:

33.180.20	Povezovalne naprave za optična vlakna	Fibre optic interconnecting devices
-----------	---------------------------------------	-------------------------------------

SIST EN 50411-3-2:2011

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 50411-3-2:2011

<https://standards.iteh.ai/catalog/standards/sist/1ac23801-1194-4896-b5b0-178ec5087b44/sist-en-50411-3-2-2011>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 50411-3-2

March 2011

ICS 33.180.20

English version

**Fibre organisers and closures to be used in optical fibre communication systems -
Product specifications -
Part 3-2: Singlemode mechanical fibre splice**

Organiseurs et boîtiers de fibres destinés
à être utilisés dans les systèmes de
communication par fibres optiques -
Spécifications de produit -
Partie 3-2: Epissures mécaniques de
fibres unimodales

LWL-Spleißkassetten und -Muffen für die
Anwendung in LWL
Kommunikationssystemen -
Produktnorm -
Teil 3-2: Mechanische Spleiße für
Einmodenfasern

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

[SIST EN 50411-3-2:2011](https://standards.iteh.ai/catalog/standards/sist/1ac23801-1194-4896-b5b0-192003010001)

<https://standards.iteh.ai/catalog/standards/sist/1ac23801-1194-4896-b5b0-192003010001>

This European Standard was approved by CENELEC on 2011-01-02. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Management Centre: Avenue Marnix 17, B - 1000 Brussels

Foreword

This European Standard was prepared by the Technical Committee CENELEC TC 86BXA, Fibre optic interconnect, passive and connectorised components.

The text of the draft was submitted to the formal vote and was approved by CENELEC as EN 50411-3-2 on 2011-01-02.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN and CENELEC shall not be held responsible for identifying any or all such patent rights.

The following dates were fixed:

- latest date by which the EN has to be implemented
at national level by publication of an identical
national standard or by endorsement (dop) 2012-01-02
- latest date by which the national standards conflicting
with the EN have to be withdrawn (dow) 2014-01-02

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 50411-3-2:2011](https://standards.iteh.ai/catalog/standards/sist/1ac23801-1194-4896-b5b0-178ec5087b44/sist-en-50411-3-2-2011)

<https://standards.iteh.ai/catalog/standards/sist/1ac23801-1194-4896-b5b0-178ec5087b44/sist-en-50411-3-2-2011>

**Fibre organisers and closures to be used in optical fibre communication systems –
Product specifications**


Part 3-2: Singlemode mechanical fibre splice

Description		Performance	
Type:	Fibre splice	Application:	EN 61753-1:2007, Category U with extension of lower temperature to - 40 °C
Style:	Mechanical	Attenuation grades	Grade B: ≤ 0,25 dB maximum (97 %) Grade C: ≤ 0,50 dB maximum (97 %)
Operating wavelength:	1 260 nm to 1 625 nm	Return loss grades	Grade 1: ≥ 60 dB Grade 2: ≥ 45 dB Grade 3: ≥ 35 dB
Fibre category	EN 60793-2-50 Types B1.1 and B1.3		

Related documents:

EN 60793-2-50	Optical fibres – Part 2-50: Product specifications – Sectional specification for class B single-mode fibres (IEC 60793-2-50)
EN 60794-2-50	Optical fibre cables – Part 2-50: Indoor cables – Family specification for simplex and duplex cables for use in terminated cable assemblies (IEC 60794-2-50)
EN 61300 series	Fibre optic interconnecting devices and passive components – Basic test and measurement procedures (IEC 61300 series)
EN 61753-1:2007	Fibre optic interconnecting devices and passive components performance standard – Part 1: General and guidance for performance standards (IEC 61753-1:2007)

Outline and maximum dimensions:

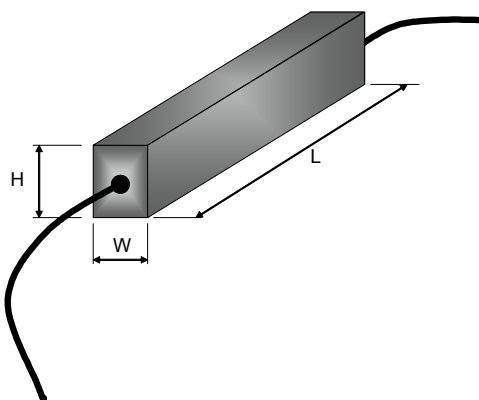

Variant	Dimension <i>W</i> mm	Dimension <i>H</i> mm	Dimension <i>L</i> mm
Type M1	3,8	6,4	38
Type M2	4,0	4,0	36
Type M3	3,2	3,2	45
Type M4	4,2	4,2	44
Type M5	4,0	4,0	40
Type M6	Ø 5,0		65

Contents

1	Scope	5
1.1	Product definition	5
1.2	Interoperability	5
1.3	Expected performance	5
1.4	Operating environment	5
1.5	Reliability	5
1.6	Quality assurance	5
2	Normative references	6
3	Description	6
3.1	General	6
3.2	Mechanical splice	7
3.3	Materials	7
3.4	Dimensions	7
3.5	Colour and marking	7
4	Variants	8
5	Dimensional requirements	9
6	Tests	9
6.1	Introduction	9
6.2	Test sample preparation	9
6.3	Test and measurement methods	10
6.4	Pass/fail criteria	10
7	Test report	10
8	Performance requirements	10
8.1	Dimensional and marking requirements	10
8.2	Installation yield requirement	10
8.3	Optical performance requirements	11
Annex A (normative) Fibre type		17
Annex B (normative) Sample size and product sourcing requirements		18
Bibliography		19

Figures

Figure 1	– Outline and maximum dimensions	9
----------	----------------------------------------	---

Tables

Table 1	– Optical fibre mechanical splice, for category U – variants	8
Table 2	– Test details and requirements	11
Table A.1	– Fibre type characteristics	17
Table B.1	– Sample size per test	18

1 Scope

1.1 Product definition

This European Standard contains the initial, start of life dimensional, optical, mechanical and environmental performance requirements, which a singlemode mechanical splice shall meet in order for it to be categorised as an EN standard product.

Since different variants and grades of performance are permitted, product marking and identification details are given in 3.5.

Although in this document the product is qualified for EN 60793-2-50 types B1.1 and B1.3 singlemode fibres, it may also be suitable for other fibre types.

1.2 Interoperability

The installed mechanical splice fits into a fibre management system with optical fibre splice cassettes or splice trays. This European Standard specifies the following two physical interface dimensions:

- a) cross sectional profile with width, height or diameter (in millimetres);
- b) length (in millimetres).

1.3 Expected performance

In this document, the performance of a mechanical splice is given with identical fibres only. Losses associated with fibre cladding diameter and mode field mismatch are not taken into account. The measured attenuation is a function of the core concentricity, cladding non-circularity and alignment capability. The optical return loss performance is a function of the index matching gel and the fibre end face preparation.

1.4 Operating environment

The tests selected combined with the severities and durations are representative of an outdoor enclosed environment defined as category U in EN 61753-1. To ensure that the product can be used in closures, boxes or street cabinet for categories A, G and S (as defined EN 61753-1) the specified lower temperature is extended to - 40 °C and requirements for temporary flooding have been added.

1.5 Reliability

Whilst the anticipated service life expectancy of the product in this environment is 20 years, compliance with this specification does not guarantee the reliability of the product. This should be predicted using a recognised reliability assessment programme.

1.6 Quality assurance

Compliance with this specification does not guarantee the manufacturing consistency of the product. This standard does not cover quality insurance.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 60793-2-50	Optical fibres – Part 2-50: Product specifications – Sectional specification for class B single-mode fibres (IEC 60793-2-50)
EN 61300 series	Fibre optic interconnecting devices and passive components – Basic test and measurement procedures (IEC 61300 series)
EN 61300-2-1	Part 2-1: Tests – Vibration (sinusoidal) (IEC 61300-2-1)
EN 61300-2-4	Part 2-4: Tests – Fibre/cable retention (IEC 61300-2-4)
EN 61300-2-5	Part 2-5: Tests – Torsion/twist (IEC 61300-2-5)
EN 61300-2-7	Part 2-7: Tests – Bending moment (IEC 61300-2-7)
EN 61300-2-9	Part 2-9: Tests – Shock (IEC 61300-2-9)
EN 61300-2-17	Part 2-17: Tests – Cold (IEC 61300-2-17)
EN 61300-2-18	Part 2-18: Tests – Dry heat – High temperature endurance (IEC 61300-2-18)
EN 61300-2-22	Part 2-22: Tests – Change of temperature (IEC 61300-2-22)
EN 61300-2-26	Part 2-26: Tests – Salt mist (IEC 61300-2-26)
EN 61300-2-27	Part 2-27: Tests – Dust – Lamina flow (IEC 61300-2-27)
EN 61300-2-33	Part 2-33: Tests – Assembly and disassembly of fibre optic closures (IEC 61300-2-33)
EN 61300-2-45	Part 2-45: Tests – Durability test by water immersion (IEC 61300-2-45)
EN 61300-2-46	Part 2-46: Tests – Damp heat cyclic (IEC 61300-2-46)
EN 61300-3-3:2009	Part 3-3: Examinations and measurements – Active monitoring of changes in attenuation and return loss (IEC 61300-3-3:2009)
EN 61300-3-4:2001	Part 3-4: Examinations and measurements – Attenuation (IEC 61300-3-4:2001)
EN 61300-3-6:2009	Part 3-6: Examinations and measurements – Return loss (IEC 61300-3-6:2008)
EN 61300-3-7:2001	Part 3-7: Examinations and measurements – Wavelength dependence of attenuation and return loss (IEC 61300-3-7:2000)
EN 61300-3-28:2002	Part 3-28: Examinations and measurements – Transient loss (IEC 61300-3-28:2002)
EN 61753-1:2007	Fibre optic interconnecting devices and passive components performance standard – Part 1: General and guidance for performance standards (IEC 61753-1:2007)

3 Description

3.1 General

A singlemode mechanical fibre splice is a passive optical interconnection component which provides optical and mechanical continuity between two optical fibres or cables. The products described in this specification are based on mechanical alignment of two cleaved fibres. The fibres are protected against ingress of dust or water by a sealing material, generally an index matching gel, to both minimise reflections and to improve attenuation at the glass/gel/glass interface.

Some splices may have a limited reinstallation capability. In this case the re-installability shall be clearly stated and the re-installation test 10 in 8.3 shall be conducted.

3.2 Mechanical splice

An optical fibre mechanical splice body contains the following pre-assembled elements:

- an alignment device;
- a sealing and index matching gel inside;
- a fibre alignment activation device like a spring, wedge or plunger;
- a fibre clamping or fixing able to withstand axial fibre loads.

Mechanical splices designed for use with cables shall contain strain relief fixing.

3.3 Materials

Materials which are not specified or which are not specifically described are left to the discretion of the manufacturer. However, the following requirements shall be met:

- all materials that are likely to come in contact with personnel shall meet appropriate health and safety regulations;
- the sealing and index matching materials shall be compatible with the materials of the fibres and the mechanical splice parts;
- all components of the splice shall be resistant to solvents and degreasing agents that are typically used to clean and degrease fibres and cables;
- metallic parts shall be resistant to the corrosive influences they may encounter during the lifetime of the product;
- exterior polymer materials shall be resistant to mould growth.

3.4 Dimensions

Outline dimensions are specified. All other dimensions are left to the discretion of the manufacturer.

3.5 Colour and marking

Marking of the product or packaging shall be in the following order of precedence:

- a) identification of supplier;
- b) manufacturing date code: year/week;
- c) manufacturers part number;
- d) variant identification number.

There is no preferred colour specified.

4 Variants

Table 1 – Optical fibre mechanical splice, for category U – variants

EN 50411-3-2 – XX₁ – X₂ – X₃ – X₄ – X₅


Variant No. XX ₁	Mechanical splice type (common profile)
M1	Mechanical splice Type 1
M2	Mechanical splice Type 2
M3	Mechanical splice Type 3
M4	Mechanical splice Type 4
M5	Mechanical splice Type 5
M6	Mechanical cable splice Type 6

Variant No. X ₂	Attenuation grade
B	≤ 0,25 dB maximum
C	≤ 0,50 dB maximum

Variant No. X ₃	Return loss grade capability (depends on cleave/process)
1	≥ 60 dB
2	≥ 45 dB
3	≥ 35 dB

Variant No. X ₄ and X ₅	Fibre types to be spliced
P	Primary coated 125/250 µm
S	Secondary coated 125/900 µm
A	Any single fibre types P or S
R	Reinforced cable

5 Dimensional requirements

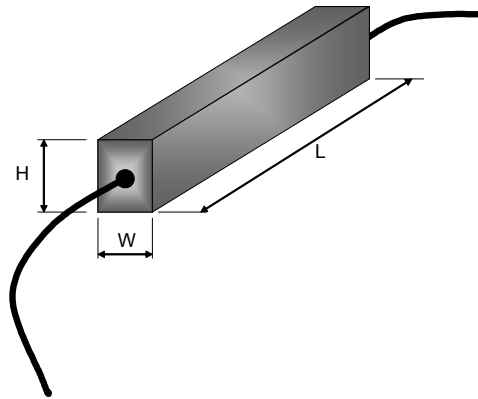

Variant	Description	Dimension W $\pm 0,1$ mm mm	Dimension H $\pm 0,1$ mm mm	Dimension L ± 1 mm mm
Type M1	Mechanical Type M1	3,8	6,4	38
Type M2	Mechanical Type M2	4,0	4,0	36
Type M3	Mechanical Type M3	3,2	3,2	45
Type M4	Mechanical Type M4	4,2	4,2	44
Type M5	Mechanical Type M5	4,0	4,0	40
Type M6	Mechanical Type M6	Ø 5,0		65

SIST EN 50411-3-2:2011
<https://standards.iteh.ai/catalog/standards/sist/1ac23801-1194-4896-b5b0-178ec5087b44/sist-en-50411-3-2-2011>
Figure 1 – Outline and maximum dimensions

6 Tests

6.1 Introduction

The mechanical and environmental performance of a fibre splice is vital to an optical cabling system. The purpose of testing is to demonstrate that a mechanical splice remains functional under defined environmental conditions, without failures.

Optical performance testing is accomplished by subjecting the test specimen to a number of mechanical and environmental conditions and by measuring any optical performance deviations at prescribed intervals during and after completion of each test.

6.2 Test sample preparation

The test samples are prepared by making a mechanical splice on identical fibres. Optical test samples shall be installed according to the manufacturers' installation instructions. The fibres for the optical test samples are singlemode fibres as described in Annex A. The length of the fibres shall be at least 2 m on each side of the mechanical splice. For each fibre construction (primary coated, secondary coated or reinforced cable) a number of test samples will be prepared as defined in Table B.1.