

CONSOLIDATED VERSION

VERSION CONSOLIDÉE



**Packaging of components for automatic handling –
Part 5: Matrix trays**

**Emballage des composants pour opérations automatisées –
Partie 5: Supports matriciels**

IEC 60286-5:2003

<https://standards.iteh.ai/standards/iec/c826e9b92-6538-47e5-a030-563edd0d702b/iec-60286-5-2003>



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2009 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in 14 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

More than 55 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Catalogue IEC - webstore.iec.ch/catalogue

Application autonome pour consulter tous les renseignements bibliographiques sur les Normes internationales, Spécifications techniques, Rapports techniques et autres documents de l'IEC. Disponible pour PC, Mac OS, tablettes Android et iPad.

Recherche de publications IEC - www.iec.ch/searchpub

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans 14 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

Plus de 55 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

CONSOLIDATED VERSION

VERSION CONSOLIDÉE



**Packaging of components for automatic handling –
Part 5: Matrix trays**

**Emballage des composants pour opérations automatisées –
Partie 5: Supports matriciels**

<https://standards.iteh.ai/standards/iec/60286-5-2003>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 31.020

ISBN 978-2-8322-1380-3

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

Withdrawn

iTech Standards
(<https://standards.iteh.ai>)
Document Preview

[IEC 60286-5:2003](#)

<https://standards.iteh.ai/catalog/standards/iec/ed6e9b92-6538-47e5-a030-563edd0d702b/iec-60286-5-2003>

REDLINE VERSION

VERSION REDLINE



**Packaging of components for automatic handling –
Part 5: Matrix trays**

**Emballage des composants pour opérations automatisées –
Partie 5: Supports matriciels**

IEC 60286-5:2003

<https://standards.iteh.ai/standards/iec/c86e9b92-6538-47e5-a030-563edd0d702b/iec-60286-5-2003>

CONTENTS

FOREWORD.....	4
1 Scope.....	6
2 Material.....	6
2.1 Electrostatic dissipative requirements.....	6
2.2 Effect of properties.....	6
2.3 Recycling and rigidity.....	6
3 Mechanical stability.....	6
3.1 Loaded tray.....	6
3.2 Empty tray.....	6
3.3 Outer edges.....	7
4 Tray design, dimensions and other physical properties.....	7
4.1 Tray design.....	7
4.1.1 Number of pockets.....	7
4.1.2 Orientation of pockets.....	7
4.1.3 Design rules for pocket density.....	7
4.2 Overall tray dimensions.....	8
4.3 Cell dimensions.....	8
4.4 Tray vacuum pick-up sites.....	10
4.4.1 Size.....	10
4.4.2 Centre.....	10
4.4.3 Perimeter.....	10
4.5 Detail features.....	10
4.6 Weight.....	10
4.7 Movement of components.....	10
4.8 Dimensional information.....	10
5 Polarity and orientation of components in the tray.....	15
5.1 Pin one.....	15
5.2 Loading.....	15
6 Tray stacking.....	15
6.1 Bundling.....	15
6.2 Top protection.....	16
6.3 Partial filling.....	16
6.4 Protrusion of components.....	16
6.5 Stack-up.....	16
6.6 Damaging of components.....	16
7 Missing components.....	16
8 Marking.....	16
Annex A (informative) List of existing matrix trays with wide anticipated use in the electronic industries.....	17
Annex B (normative) Measurement methodology of the tray dimensions.....	29

Figure 1 – Sample of leaded packages.....	9
Figure 2 – Sample of grid array packages.....	9
Figure 3 – Tray main view.....	11
Figure 4 – Tray stacking details.....	12
Figure A.1 – Thin tray.....	17
Figure A.2 – Thick matrix.....	25
Figure B.1 – Cross- sections of the outline dimensions.....	30
Figure B.2 – Tray thickness.....	30
Figure B.4 – Examples of tray warpage.....	31
Figure B.5 – Top view of a tray showing the measurement locations for the outline dimensions.....	31
Figure B.6 – Measurement locations for tray thickness.....	32
Figure B.7 – Holding position in calliper jaws for measurement.....	32
Figure B.8 – Correction of a lift of the tray at the measurement point.....	32
Figure B.9 – Measurement locations for the stackable design.....	33
Figure B.10 – Measurement points for warpage.....	33
Table 1 – <i>P</i> and <i>W</i> dimension.....	7
Table 4.2 – Height dimensions.....	8
Table A.1 – Variations.....	19
Table A.2 – PGA variations.....	27

INTERNATIONAL ELECTROTECHNICAL COMMISSION

PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING –**Part 5: Matrix trays**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This Consolidated version of IEC 60286-5 bears the edition number 2.1. It consists of the second edition (2003-10) [documents 40/1341/FDIS and 40/1364/RVD] and its amendment 1 (2009-02) [documents 40/1942/FDIS and 40/1971/RVD]. The technical content is identical to the base edition and its amendment.

In this Redline version, a vertical line in the margin shows where the technical content is modified by amendment 1. Additions and deletions are displayed in red, with deletions being struck through. A separate Final version with all changes accepted is available in this publication.

This publication has been prepared for user convenience.

International Standard IEC 60286-5 has been prepared by IEC technical committee 40: Capacitors and resistors for electronic equipment.

This edition includes the following significant technical changes from the previous edition.

- a) The generic rules for the design of matrix trays are given in this standard. Newly developed trays which follow these rules will not be listed individually. Only those trays which conform to the design rules set forth herein are classified as “standard trays” and are thus preferred for use.
- b) An update of the matrix trays, which do not conform to the design rules set forth herein, are considered as “non-standard trays” and are not preferred for use, is listed in Annex A.

The French version of this standard has not been voted upon.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of the base publication and its amendment will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The “colour inside” logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this publication using a colour printer.

PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING –

Part 5: Matrix trays

1 Scope

This part of IEC 60286 describes the common dimensions, tolerances and characteristics of the tray. It includes only those dimensions which are essential for the handling of the trays for the stated purpose and for placing or removing components from the trays.

Matrix trays are designed to facilitate the transport and handling of electronic components during their testing, baking, transport/storage, and final mounting by automatic placement equipment.

The generic rules for their design are given in this standard. Newly developed trays which follow these rules will not be listed individually. Only those trays which conform to the design rules set forth herein are classified as “standard trays” and are thus preferred for use.

NOTE Matrix trays listed in Annex A which do not conform to the design rules set forth herein shall be considered as “non-standard trays” and are not preferred for use.

2 Material

2.1 Electrostatic dissipative requirements

Trays shall be moulded from material that meets the ESD dissipative requirements ~~which are:~~ with surface resistance equal to or greater than $1,0 \times 10^5$ ohms/square but less than $1,0 \times 10^{12-11}$ ohms/square.

2.2 Effect of properties

The tray material shall not adversely affect the mechanical, electrical characteristics, solderability, or marking of the component during or after transport, baking or storage in the tray.

2.3 Recycling and rigidity

The tray material shall be reusable or recyclable and shall be rigid enough to avoid damage to the components during handling, loading, baking, testing, shipping and placement operations.

There should be space for a recycle logo and material code or material declaration close to ‘Detail B’.

3 Mechanical stability

3.1 Loaded tray

Mechanical stability of loaded trays shall be such that the components are adequately retained, without lead damage, and can be easily removed from the tray.

3.2 Empty tray

The empty tray shall withstand normal environmental conditions (including component baking temperatures, if required) without distorting, warping, expanding, shrinking or any other physical change outside the specified dimensions of the trays.

3.3 Outer edges

The outer edges of the tray shall be of sufficient thickness and strength to allow mechanical positioning and clamping.

4 Tray design, dimensions and other physical properties

4.1 Tray design

4.1.1 Number of pockets

All new tray proposals should maximize the number of pockets in each tray-family variation without violating the pocket-density design rules specified in 4.1.3.

4.1.2 Orientation of pockets

When designing a tray for a rectangular package, the longest dimension (D) of the package is oriented parallel to the length of the tray to maximize tray pocket density.

4.1.3 Design rules for pocket density

4.1.3.1 Formulas

DT is D_{\max} + strengthening pocket rib width W

ET is E_{\max} + strengthening pocket rib width W

M is $(135,9 \text{ mm} - M3(N1 - 1))/2$

$M1$ is $(315,0 \text{ mm} - M2(N2 - 1))/2$

$M2$ is $[(315,0 \text{ mm} - 6,4 \cdot 2P \text{ mm}) - W(N2 - 1)]/N2 + W$

$M3$ is $[(135,9 \text{ mm} - 6,4 \cdot 2P \text{ mm}) - W(N1 - 1)]/N1 + W$

$N1$ is $(135,9 \text{ mm} - 6,4 \cdot 2P \text{ mm})/ET$ (rounded down to a whole number)

$N2$ is $(315,0 \text{ mm} - 6,4 \cdot 2P \text{ mm})/DT$ (rounded down to a whole number)

NOTE After the maximum matrix has been established by the above calculation using a minimum W value, $N1$ and $N2$ may not have resulted in even numbers and may therefore have been rounded down to the nearest whole number. This means we may have fractions of millimetres extra that should be added back to $M2$ and $M3$ to maximize the pitch between the pockets while minimizing the edge of the tray to the centre line of the first pocket M and $M1$.

The dimensions P and W are given in Table 1.

Table 1 – P and W dimension

Dimension	Thin tray		Thick tray mm
	Normal stacking tray mm	Low stacking tray mm	
P	3,2	5,0	5,0
W	2,0	2,5	2,0

4.1.3.2 Constituents of the design rules, formulas and drawings

- D_{max} is determined by appropriate specification
- DT is the max. length D + strengthening pocket rib width W
- E_{max} is determined by appropriate specification
- ET is the max. width E + strengthening pocket rib width W
- M is the edge of the tray width to the centre line of the first pocket
- $M1$ is the edge of the tray length to the centre line of the first pocket
- $M2$ is the pitch of the tray pocket in the tray length
- $M3$ is the pitch of the tray pocket in the tray width
- N is the package lead counts supported
- $N1$ is the number of columns in the tray
- $N2$ is the number of rows in the tray
- $N3$ is the total number of pockets in the tray ($N1 \times N2 = N3$)
- $N4$ is the package type accommodated
- $N5$ is the end vacuum pick-up area(s)
- $N6$ is the centre vacuum pick-up area(s)
- P is the edge of the tray to the edge of the pocket
- W is the strengthening pocket rib width

NOTE The tray sponsor will determine W from the latest manufacturing capabilities and design feature needs at the time of the new tray-family design.

W should not exceed the target value of 2,00 mm Table 1 in order to achieve the maximum tray density unless required by application.

4.2 Overall tray dimensions

Overall tray dimensions shall be 322,6 mm in length and 135,9 mm in width. Overall height A , stacking step height $A1$ and edge height $A2$ are given in Table 4 2.

Table 4 2 – Height dimensions

Dimension	Thin tray mm		Thick tray mm
	Normal stacking tray mm	Low stacking tray mm	
A	7,62	7,62	12,19
$A1$	6,35	5,62	10,16
$A2$	1,27 typically	2,00 typically	2,00 2,03 typically

Measurement methodology of the tray outline dimensions, height, stacking feature dimensions and warpage are described in Annex B.

4.3 Cell dimensions

Cell dimensions are derived from package dimensions. The information given in this section is intended for reference only. Package types shown in Figures 1 and 2 are not intended in any way to limit types of present or future designs which may require matrix trays.

D and E dimensions represent the largest overall features of a package (lead or body).

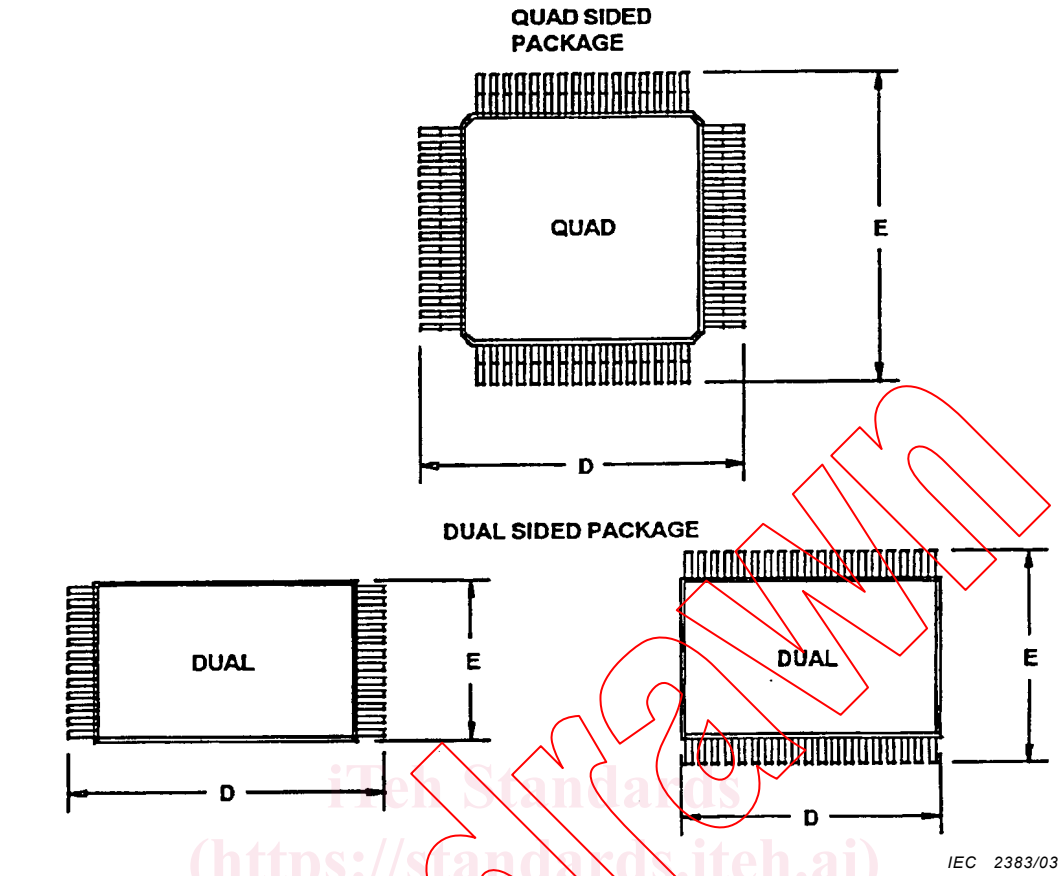


Figure 1 – Sample of leaded packages

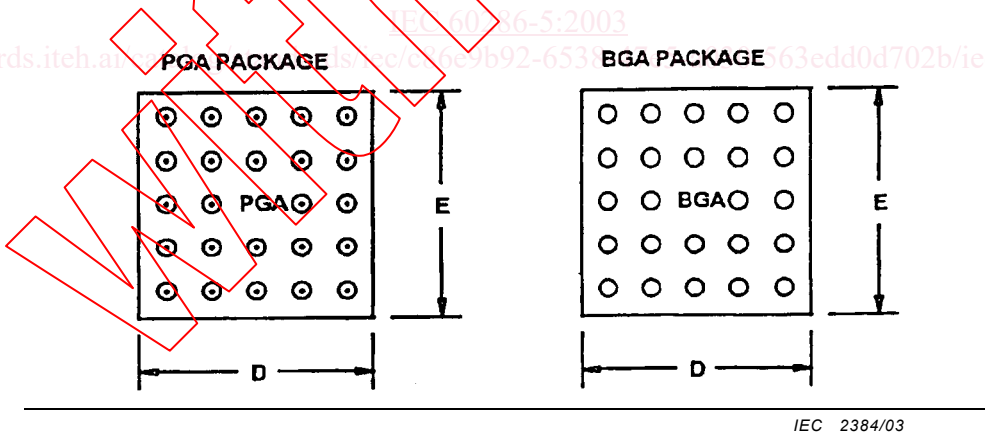


Figure 2 – Sample of grid array packages

4.4 Tray vacuum pick-up sites

4.4.1 Size

The closed walled vacuum pick-up area should be at least 28 mm × 28 mm.

4.4.2 Centre

A minimum of one walled vacuum pick-up area should be located as close to the centre as possible.

4.4.3 Perimeter

A minimum of one perimeter vacuum pick-up area should be located at each end of the tray.

4.5 Detail features

All cavity detail features must begin at a minimum distance of $P = 3,2$ mm ~~from the external end of the tray (see Figures 3 and 4)~~ [Thin tray(normal tray)] or $P = 5,0$ mm [Thin tray(Low stack tray) and Thick tray)].

NOTE The straightness call-out of 0,80 mm may have to be reduced when designing trays for thinner packages.

4.6 Weight

The empty tray weight shall not exceed 300 g.

4.7 Movement of components

The tray cell design shall minimize the component movement. The component shall not rotate more than 2,5° in any direction.

4.8 Dimensional information

Figures 3 and 4 state dimensions for the tray main view and for the tray stacking details.